




MIRBA IP44

INSTALLATION INSTRUCTIONS | MARCH 2023


Necessary for IP-rating

	A	B	C
CABLE			
TYPE	ROUND H05RN-F H07RN8-F H07RN-F	ROUND H05RN-F	ROUND
OUTSIDE Ø	min 6.8mm max 8.9mm	min 5mm max 6.8mm	min 1.5mm max 2.6mm
CONDUCTION SECTION	2or3x 0.75mm² 2or3x 1.0mm² 2or3x 1.5mm²	2or3x 0.75mm² 2x 1.0mm²	0.75mm² 1.5mm²


Mounting base:

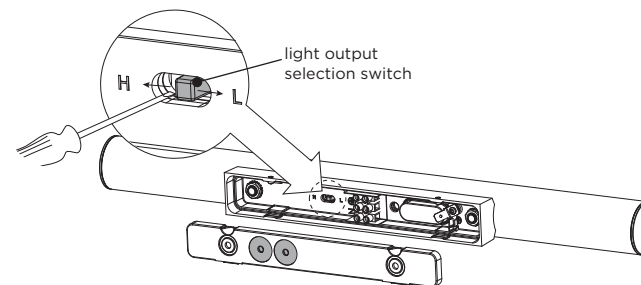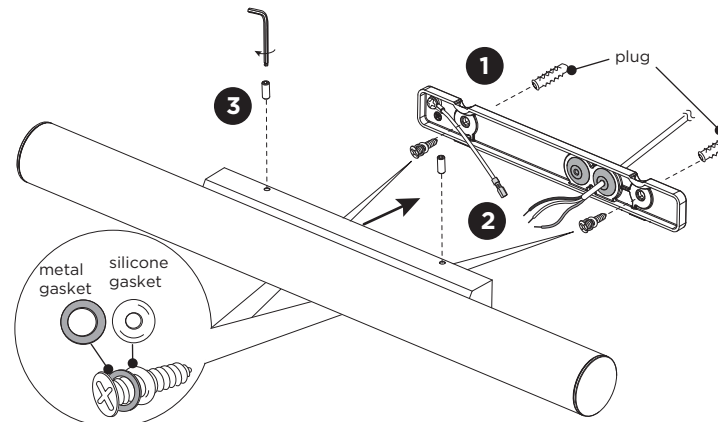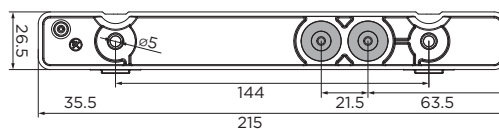

Product must be powered off before switching.




High light output



Low light output


DIMENSIONS

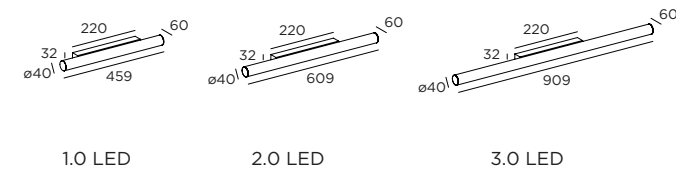


MOUNTING INSTRUCTION

- 1 Remove the mounting base by loosening the socket screws and mount it on the wall with the screws and the plugs.
Important note: the screws need to hold both the metal gaskets as the silicone gaskets when fixing them into the plugs (screws, gaskets and plugs are included).

- 2 **POWER CONNECTION**
connect to 220-240V




for the base earth cable:



- 3 Fix the luminaire on the base with the 2 socket screws.

MIRBA IP44


INSTALLATION INSTRUCTIONS | MARCH 2023

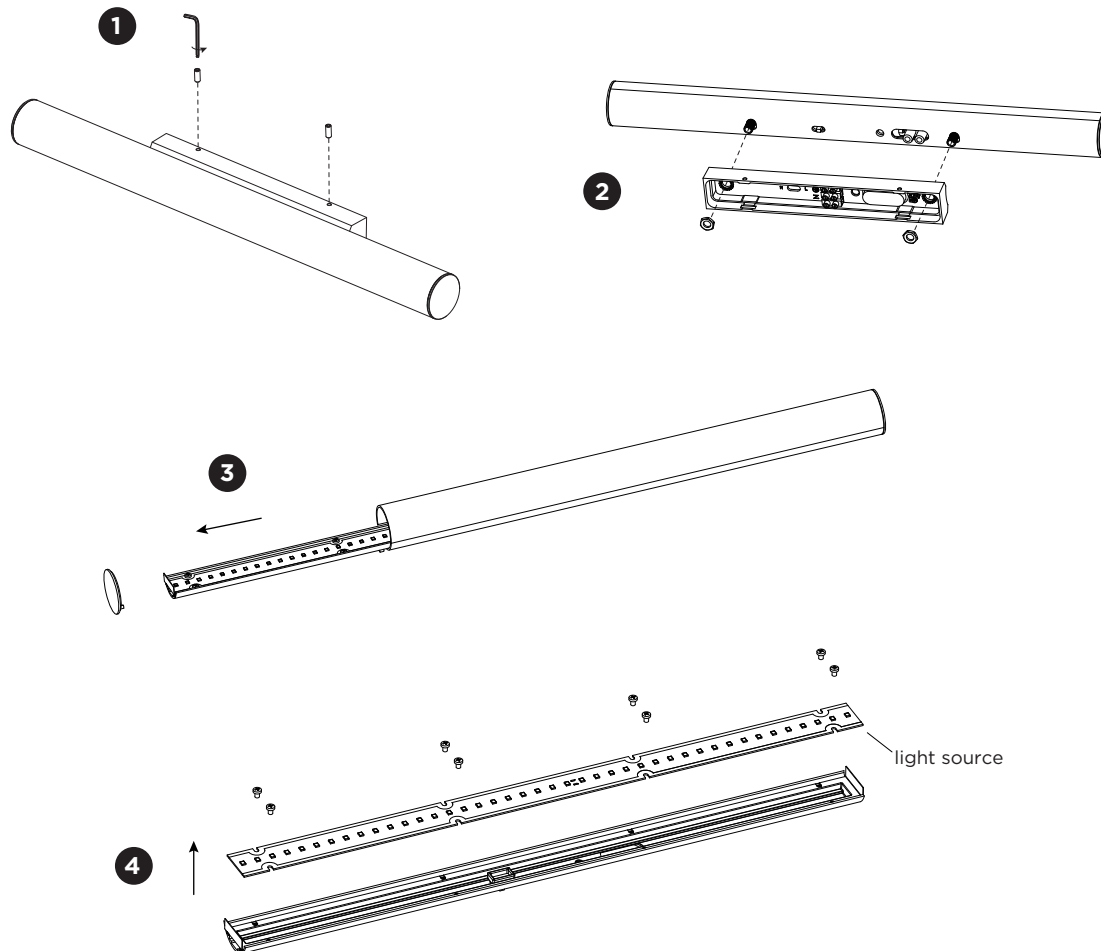

DISMOUNTING AND RECYCLING INSTRUCTIONS

Light source

- 1** Dismount the luminaire from the base by removing the 2 socket screws.
- 2** Unscrew the nuts, loosen the wires and take the tube off.
- 3** Remove the endcap and pull out the profile with the light source.
- 4** Unscrew the light source to remove it.



The light source is replaceable by an authorized professional.
For advice contact your Wever & Ducré customer service contact point.



This luminaire contains a light source with the energy class F.