

# Assembly Picture Guide

## Margin Pendants




1: Unpack Lamp.



2: Unscrew washer, situated underneath the lighting fixture



3: Remove the fixture

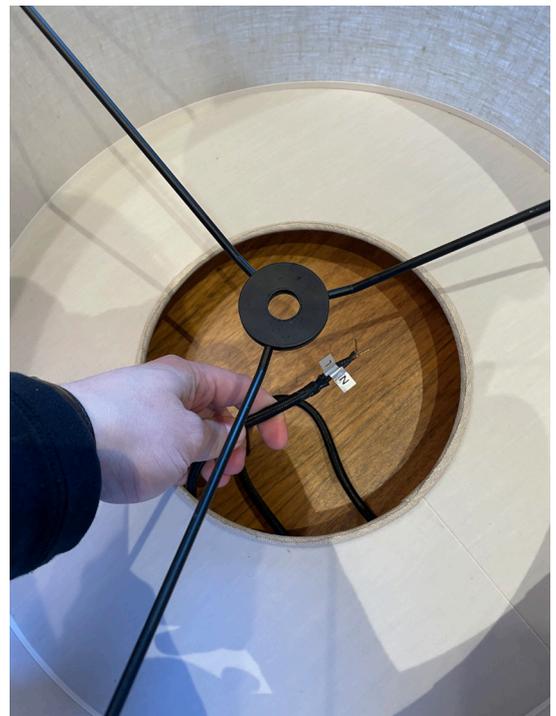

4: Pull wire/cable from the bottom through the exposed hole



5: Fit the washer on the top, to fix the lighting fixture. don't tightening too much, to allow the lamp to felx



6: Take the inner shade and put it through the opening in the outer shade.




7: The threaded tube from the fitting should go through the support structure of the inner shade



8: Fasten the inner lamp shap with the tube.



9: Take the open ended tube

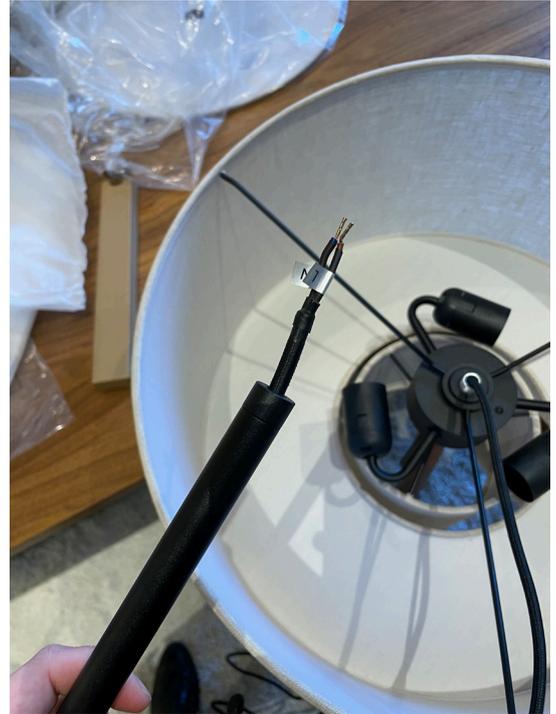

10: Pull the wire through



11: Your lamp looks like this now.



12: Wire goes through the lid.



13: Finished assembly (before canopy is mounted)



14: If the inner shade is not straight, tug it slightly and release it to put it in place. If this give you trouble, slightly loosen or tighten the tube holding the inner shade.