


Datasheet | S18010

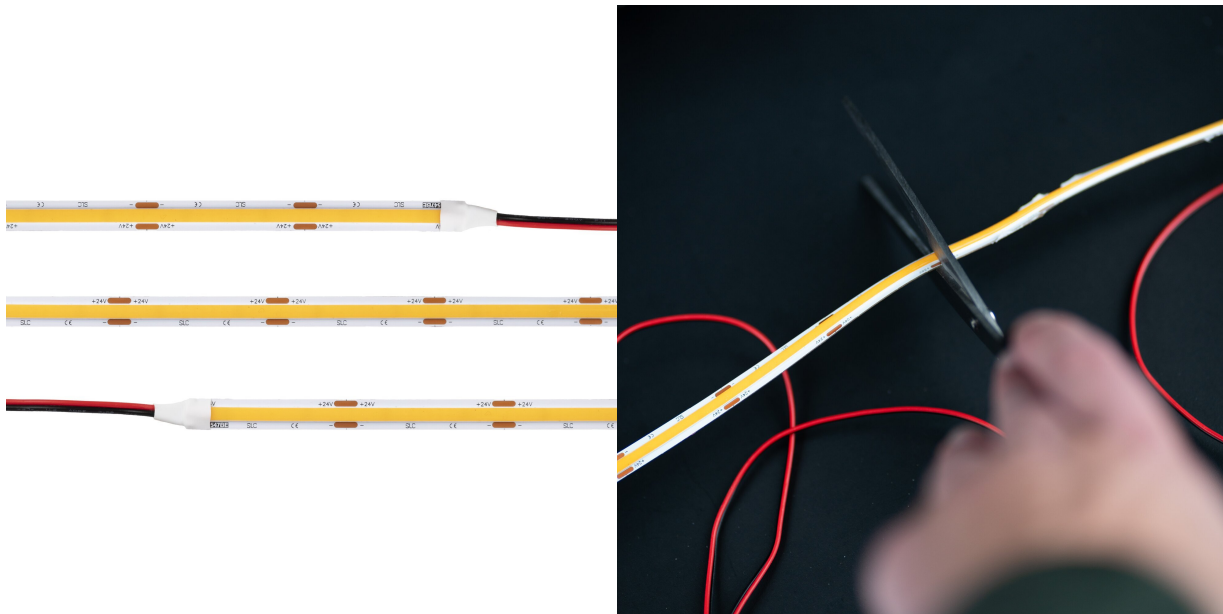

SLC COB Standard 10W/m 1020lm/m 2700K Ra>90 24V IP20 5m

COB Standard LED-Streifen bieten eine gleichmäßige Lichtquelle ohne sichtbare LED-Punkte. Entwickelt mit perfekter Lichtmenge für die meisten Installationen. Alle 20 mm kürzbar. Erhältlich in 5-Meter-Rollen mit 2-Meter-Kabeln an beiden Enden. Wählen Sie zwischen 2700K, 3000K oder 4000K. Verfügbar in IP20 oder IP67.

Electrical

Input	24V DC
Technology	Konstantspannung (CV)
Iso Current Technology (IC)	No
Rated power	50 W
Rated power per meter	10 W/m
Control type	24V
Cable type	2 x 0,35 mm ²
Connection	2 Meter Zuleitung an jedem Ende
Expected lifetime (25°C)	100 000 hours
Light reduction (25°C)	L70B50
Max length per connection	5 Meter
Operating temperature (Ta)	-20°C ~ +45°C

Light technic

Lumens pr. meter	1020 lm
Efficacy	102 lm/W
Colour temperature	2700K
Colour rendering (CRI/Ra)	Ra>90
MacAdam (SDCM)	3
Beam angle fixed	150 °
Number of LEDs per meter	384
Dimmable	Ja, mit PWM oder AM

Mechanical

IP rating	IP20
Cutting point, every	21 mm

Dimensions

Height	2.3 mm
Height excluding feeder	2.3 mm
PCB width	8 mm
Width	8 mm
Width excluding feeder	8 mm
LED-Strip length	5 m
Length	5000 mm
Product net weight	155 g