


MAINS SUPPLY

LIGHT FITTING


LIVE - Possible colours : Red or Brown

⊕ EARTH - Un sleeved copper or (Green / Yellow)

NEUTRAL - Possible colours : Black or Blue



SAFETY INFORMATION: (Please retain for future reference)

- Always turn off the mains supply before commencing the installation of this fitting .
- This is a Class 1 product and so it requires an Earth connection – 230 (240) Volts – 50Hz AC.
- This product must be installed in accordance with the national building regulations, if in doubt consult a qualified electrician.
- This fitting is suitable for installation in Indoor locations only . 
- Do not mount the fitting in a damp atmosphere.
- Do not stare at the operating lamp when using LED lamps .
- The Luminaire should be positioned so that prolonged staring into the luminaire at a distance closer than 0.2m is not expected
- Ensure sufficient access to the fitting to enable safe maintenance.

LAMP INFORMATION

- Do not exceed the maximum wattage and bulb type stated on the lamp holder.
- This fitting is suitable for use with Incandescent, Halogen or LED lamps.
- This fitting is suitable for dimming, however if the luminaire is fitted with LED lamps they must be a “dimnable “ version


AFTERCARE AND MAINTENANCE:

- Always disconnect power supply when servicing or cleaning.
- Clean only with a dry or slightly damp cloth.
- Do no use any abrasive cloths or cleaners as this may damage the product

ADDITIONAL INFORMATION:

- If the height of the fitting requires shortening we recommend the supply cable that may need to be cut to a shorter length is done by a qualified electrician (Remember to mark clear cable with Live, Neutral and Earth prior to removing from the terminal block).
- The length of the supply cable CANNOT be increased .

EXTRA ADDENDUM :

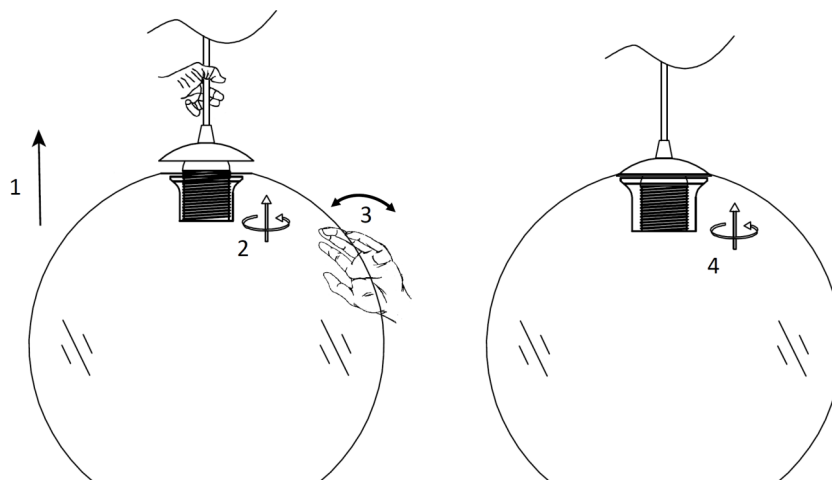

1. Place the glass shade onto the lamp holder.
2. Screw the shade ring onto the lamp holder to hold the shade, do not lock in place.
3. Adjust the shade by rotating until the shade sits straight with the metal shade cap and supply cable.
4. When the shade is in the correct position, tighten up the shade ring to lock in place