

LED flush-mounted dimmer T39.08

Item-no.: 3900x0800



Suitable for dimmable LED-lamps, incandescent-, HV- and LV-halogen lamps with magnetic transformer

Compatible with common switch ranges from GIRA, Busch Jäger, Berker, Jung etc.

Opportunities for optimized and flicker-free dimming of LED lamps in min. area

Short-circuit, overload and over-temperature protection

No stand-by consumption because of a real on/off switch

EHMANN Advantage - 100 % quality assurance, 5 years warranty, German manufacturer


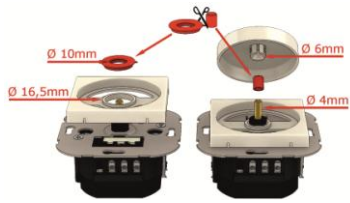


EHMANN service - Up to date LED recommendation accessible via imprinted QR-code at any time

EHMANN quality - High-grade manufacturing and reliable function



LED flush-mounted dimmer T39.08

Technical data

<p>3 - 85 W LED rated power</p>	<p>20 - 250 W/VA Rated power</p>	<p>230 V ~ (+/- 10%) / 50 Hz Rated voltage</p>
<p>Suitable for dimmable LED-lamps, incandescent-, HV- and LV-halogen lamps with magnetic transformer</p>		
<p>Operating principle: leading edge Function: rotation dimmer with pressure two-way switch Shaft: metal shaft \varnothing 4 mm with fine raster (\varnothing 6 mm with shaft adapter) Connection: screw terminals up to 2 x 2.5 mm² (rigid) Temperature protection: thermal fuse Overload/short-circuit protection: fuse T2AH/250V (incl. spare fuse)</p>		
<p>Switch range adapter Allows the use of common covers e.g. Gira, Busch-Jäger, Jung, Berker.</p> 	<p>LED recommendation Shows which LEDs are compatible with this dimmer. Available via QR code or online at www.ehmann-gmbh.de</p> 	<p>Optimization possibilities for flicker-free dimming of LED-lamps In case of flickering during dimming the LED lamp, you can try to adjust in the lowest dimming range the minimum brightness and try to optimize the dimming behavior.</p> <p>Min</p> 
<p>Item-no. 3900x0800 EAN 401209600299 4 PU 10</p>		<p>71 x 71 x 33 mm Dimension (L x W x H)</p>