LED Vario Spot Luminaire – **SNAKE**

Instruction Manual

TECHNICAL SPECIFICATION:

Series Name	LIGHTME® POWERLENS		
Model Number	LM85830	LM85831	LM85832
Color	Black	White	Titan
Lamp Holder	GX53		
Incl. Light Source	LM85801	LM85800	LM85802
Light Source Wattage	4,8W		
Beam Angle	60°		
Total Luminous Flux	460lm		
Energy Efficiency Class Light Source <X>	F		
Voltage	220–240V~		
Frequency	50/60 Hz		
IP Rating	IP20		

ATTENTION:

- Instant start is allowed.
- The luminaire may only be used with GX53 LED light source!
- The operating temperature of the luminaire is -20° C to +40° C.
- Designed for indoor applications.

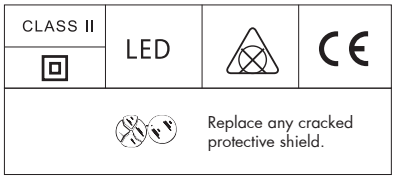

CAUTIONS:

- Read the entire manual carefully before installation and operation.
- Installation or replacement should be performed only by licensed and qualified electricians.
- DO NOT disassemble the inner part of the luminaire. Doing so may result in luminaire damage or malfunction.
- Switch OFF the power source before installation, replacement and cleaning!
- Wearing gloves during installation is recommended to ensure the luminaire is kept in the best condition.
- Before replacement of the lamp or luminaire, turn it off and allow it to cool down. Heat-resistant gloves are mandatory when handling the luminaire.
- The manufacturer accepts no liability for any damage resulting from the misuse of the luminaire or from when it is used with inappropriate equipment.
- This product contains a light source of energy efficiency class <F>.
- Consult your dealer if you have any enquiries.

INSTALLATION: LM85830, LM85831, LM85832



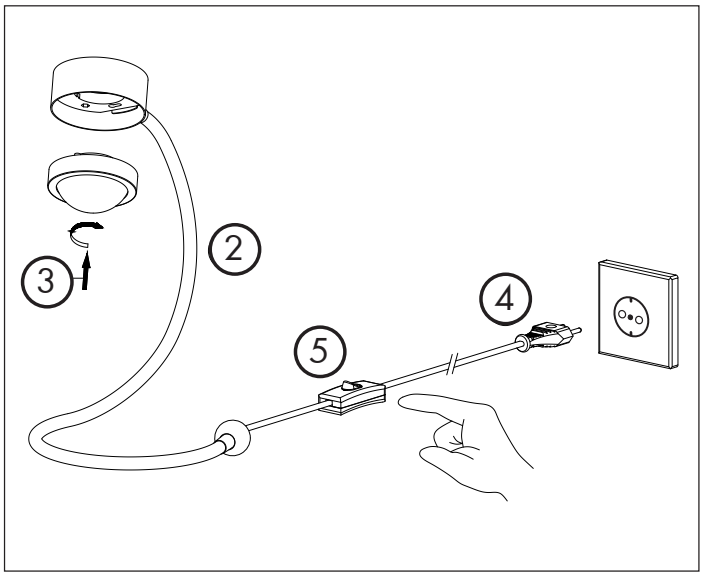



1. Switch OFF the power supply.
2. Carefully remove the Vario spotlight from its packaging. For an optimal stand, bend the neck of the lamp as shown in the drawing.
3. Screw the LM85800/LM85801/ LM85802 light source into the socket. Plug the Schuko mains plug of the light into a 230V/50Hz socket
4. To turn the light on and off, use the toggle switch on the cord.
5. Turn ON the power supply.

Correct disposal of this product:

This marking indicates that this product should not be disposed with other household wastes throughout the EU. To prevent possible harm to the environment or human health from uncontrolled waste disposal, recycle it responsibly, to promote the sustainable reuse of material resources. To return your device, please use the return and collection systems, or contact the retailer where the product was purchased. They can take this product for environmental safe recycling.

IDV GmbH I Birkenweiherstraße 2 I D-63505 Langenselbold I Germany I www.lightme.eu

GB