



ALGAE M PD

696-00102032355dv1


ALGAE SUSPENSION made of aluminium, white, similar to RAL 9016, beam 38°, light output direct, max. 700mA, dimmable DALI, cable white, soft-touch, adapter/ceiling base white, pendant length 1500mm, IP20

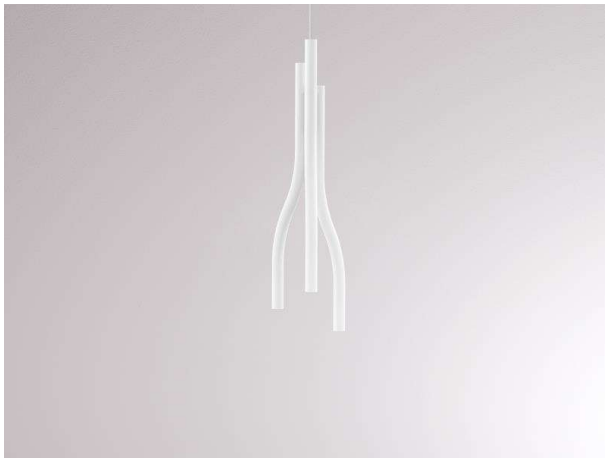

DRAWING

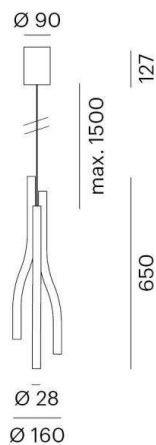

LIGHT DISTRIBUTION CURVE

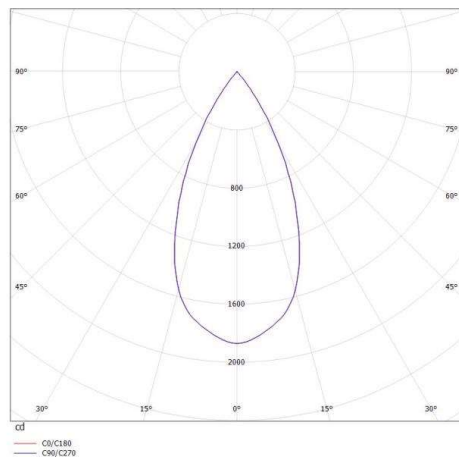

TECHNICAL DETAILS

System perform. [W]	14
Bulb type	LED
Luminous flux [lm]	1220
Current sec. [mA]	700
Colour temp. [K]	2700K
CRI	>90
Optics	vacuum deposited synthetic reflector Rainer Mutsch
Designer	DALI
Dimming	direct
Light output	38°
Beam angle [°]	220-240V 50/60Hz
Voltage [V]	aluminium
Material	
Length [mm]	140
Height [mm]	650
Pendant length [mm]	1500
Diameter [mm]	160
IP protection class	IP20
Voltage class	protection cl. I
Net weight [kg]	0,71
Color lamp	white
RAL	9016
Color adapter/ceiling base	white
Electric wire	white, soft-touch
EAN-Number	9010506238471
Lifetime [h]	50 000 L80 B10
No. of luminaires B16A	50

The values are rated values. Power and luminous flux are initially subject to a tolerance of +/- 10%. Colour temperature tolerance: +/- 150 K. The values apply to an ambient temperature of 25°C unless otherwise specified.