


2700K / 3000K / 4000K





8

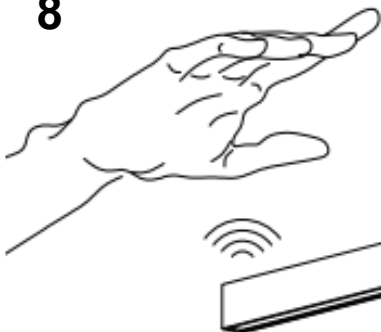



MAINS SUPPLY

LIGHT FITTING



SAFETY INFORMATION: (Please retain for future reference)

- Always turn off the mains supply before commencing the installation of this fitting .
- This is a Class 2 product and does not requires an Earth connection –  230 (240) Volts – 50Hz AC.
- This product must be installed in accordance with the national building regulations, if in doubt consult a qualified electrician.
- This fitting is suitable for installation in Indoor locations only . 
- Do not mount the fitting in a damp atmosphere.
- Do not stare at the operating LED strips .
- The Luminaire should be positioned so that prolonged staring into the luminaire at a distance closer than 0.2m is not expected
- Ensure sufficient access to the fitting to enable safe maintenance.

ON / OFF & DIMMER

- Move hand over the switch to switch on at 2700K, keep hand there to dim and brighten at 2700K. Remove hand and light stays at level selected.
- Move hand back over switch to select 3300K, keep hand there to dim and brighten at 3300K. Remove hand and light stays at level selected.
- Move hand back over switch to select 4000K, keep hand there to dim and brighten at 4000K. Remove hand and light stays at level selected.
- Move hand back and forth over switch to switch off.
- If the light is already lit, turn off and turn on the wall switch, the light will become straight on. If the light is switched off by gesture controlling rather than wall switch, the light will not come straight on by wall switch and need to move hand over the switch to make the light on and it will stay at level selected last time.

AFTERCARE AND MAINTENANCE:

- Always disconnect power supply when servicing or cleaning.
- Clean only with a dry or slightly damp cloth.
- Do no use any abrasive cloths or cleaners as this may damage the product