

# Operating Instructions Remote control for WIPO lamps with a 6-channel remote control and a CC2 V2 receiver (ColorControl)

Frequency 868 Mhz; IP 20 protection class


**PÖLLET**  
**PRODUKTION**

Allersberger Str. 52  
90596 Schwanstetten



## 1 Battery and change of battery

**! Insert battery before the first start-up. !**

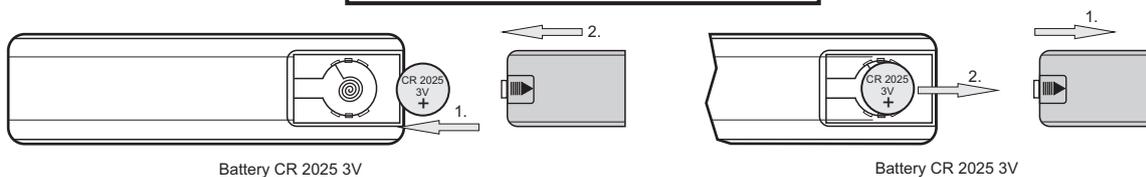


Battery CR 2025 3V

Battery CR 2025 3V

The saved settings remain intact even after change of battery.

**! The lamp is factory-coupled with Channel 1. !**


## 2 Remote control function overview

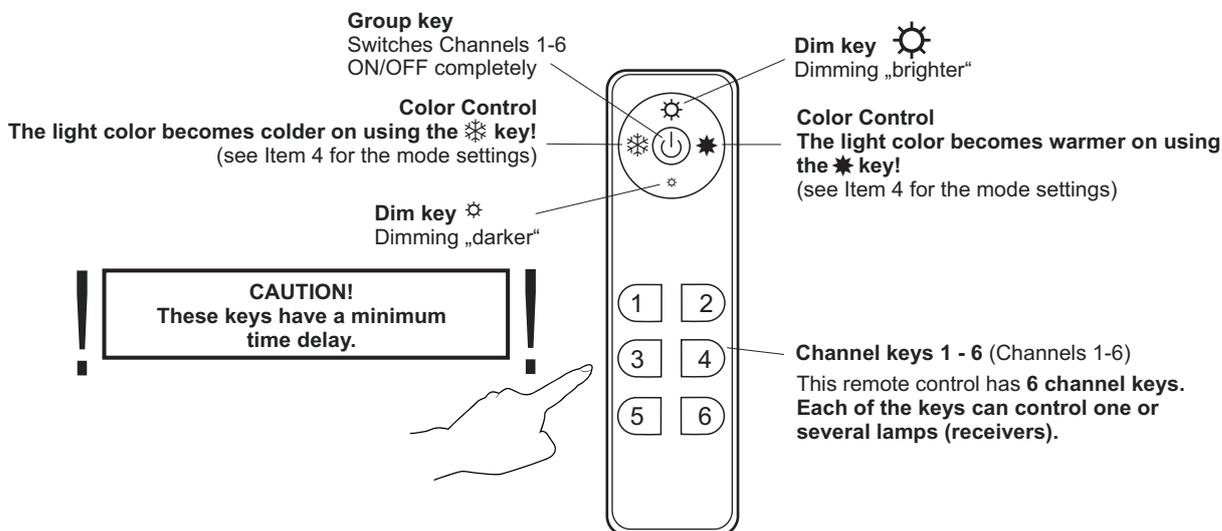

## 3 Lamp operation with a wall on/off switch:

The connected lamp(s) always starts at the previously deployed setting on being switched on/off at an ON/OFF switched provided by others (e.g in the wall).

Light Color and Brightness has been set, for example, with the remote control

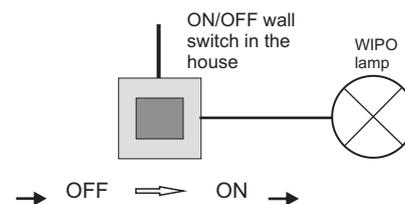

**! CAUTION!** The lamp starts at the previously deployed settings if the pause between OFF and ON SWITCHING with a wall on/off switch is **more of 15 seconds**.

## 4 Coupling with the lamp (Empfänger/Receiver):

Briefly press the „Learning Key“ at the receiver (max. 1 sec.).

On the remote control press any **Channel key (1 - 6)**. Then press the ❄️ key.

Successful coupling is indicated by the connected lamp briefly flashing 1 x.


### Disconnecting coupled appliances:

Press the „Learning Key“ for more than 3 sec.

The connected LED lamp briefly flashing twice indicates successful disconnection. This deletes all saved settings at the lamp. (decoupled)

The Empfänger/Receiver is inside the lamp!

Key for coupling with remote control („Learning Key“)



Data wipo 2D-CC-Receiver : Input 12 VDC  
Power 6A 70W

Please see reverse!

## 5 Individual mode settings of the other channels

**! Only Channel 1 is factory pre-set in Mode 2. All the other channels need to be set! !**

**MODE 1** => only light dimming with the dim keys

**MODE 2** => dimming and set light color. (from warm to cold white)

**This mode is factory pre-set for Channel key 1!**

**This mode only functions with WIPO lamps with Color Control function!**

This can be infinitely set with the ❄️ (Cold White) and ⚡ (Warm White) keys.

**Always set /programme the respective mode to operate other channel keys (2-6) with other WIPO lamps**

Setting / Programming


### Mode 1:

Press the required channel key (1-6) together with the ⚙️ key and keep pressed for over 6 sec.

For the respectively chosen channel, the keys ⚡ and ❄️ are now deactivated.

There is no acknowledgement.

This can be carried out for all channels!

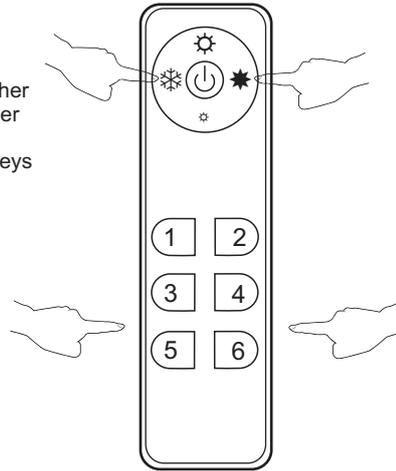

Setting / Programming

### Mode 2:

Press the required channel key (1-6) together with the ⚡ key and keep pressed for over 6 sec.

For the respectively chosen channel, the keys ⚙️, ❄️ and ⚡ are now activated. There is no acknowledgement.

This can be carried out for all channels!

## 6 Synchronising

You can control a number of WIPO lamps (up to 8 lamps) with a remote control.

Only if all the lamps are of the same mode is this possible! (Mode1 or Mode2; only dim or dim and light color)


You have already coupled a lamp with a channel in a certain mode (Mode 1 or 2)!

You now want to couple another lamp with this channel.

Proceed as specified in Item 3 (Allocation of the channels).

The other lamp is coupled with the channel.

## 7 Installing the attached wall holder

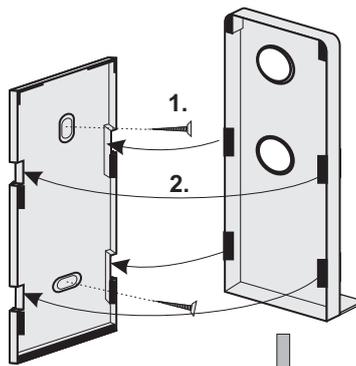


Remove the base plate and fix where it is wanted with suitable screws.

Screws not included in the scope of supply!

3.

Press the holder cover lugs into the base plate recesses and push downwards.

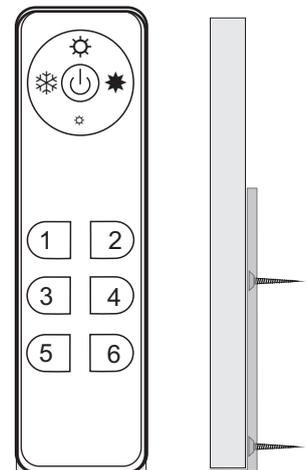

Place the remote control onto the magnet holder.