

Luminaire

Code 1740050A
Name DEMETRA PROF.LED T CORPO + MD NRO OP.

Measurement

Code FTS1601577
Name DEMETRA PROF.LED T CORPO + MD NRO OP.

Luminaire Flux	960 lm	Luminaire Power	12.0 W	Efficacy	80.000 lm/W	Efficiency	100.00%
Source Flux	960 lm	Maximum value	608.87 cd/klm	Position	C=0.00 G=0.00	CG	Rotosymmetrical
Round Luminaire		Diam.	130 mm	Height	25 mm		
Round Luminous Area		Diam.	20 mm	Height	0 mm		
Horizontal Luminous Area			0.000314 m2	Emitting area on Plane 180°			0.000000 m2
Emitting area on Plane 0°			0.000000 m2	Emitting area on Plane 270°			0.000000 m2
Emitting area on Plane 90°			0.000000 m2	Glare area at 76°			0.000076 m2
Coordinate system		CG		Symmetry Type		Rotosymmetrical	
Date		30-06-2016		Maximum Gamma Angle		180	
Measurement Distance		0.00		Measurement Flux		960 lm	
LED Flux=1145lm LED Power=9,3W Eff=84% EfcLed=123lm/W EfcLum=80lm/W Ra=90 SDCM=2 L70(6K)=50000h							
C.I.E.	68 97 100 100 100			D DIN 5040	A50		
F UTE	1.00 C			B NBN	BZ 2		

Diam=130mm




Semipiani C

180.0 ——— 0.0

ULOR 0.00 %

DLOR100.00 %

RN 0.00 %

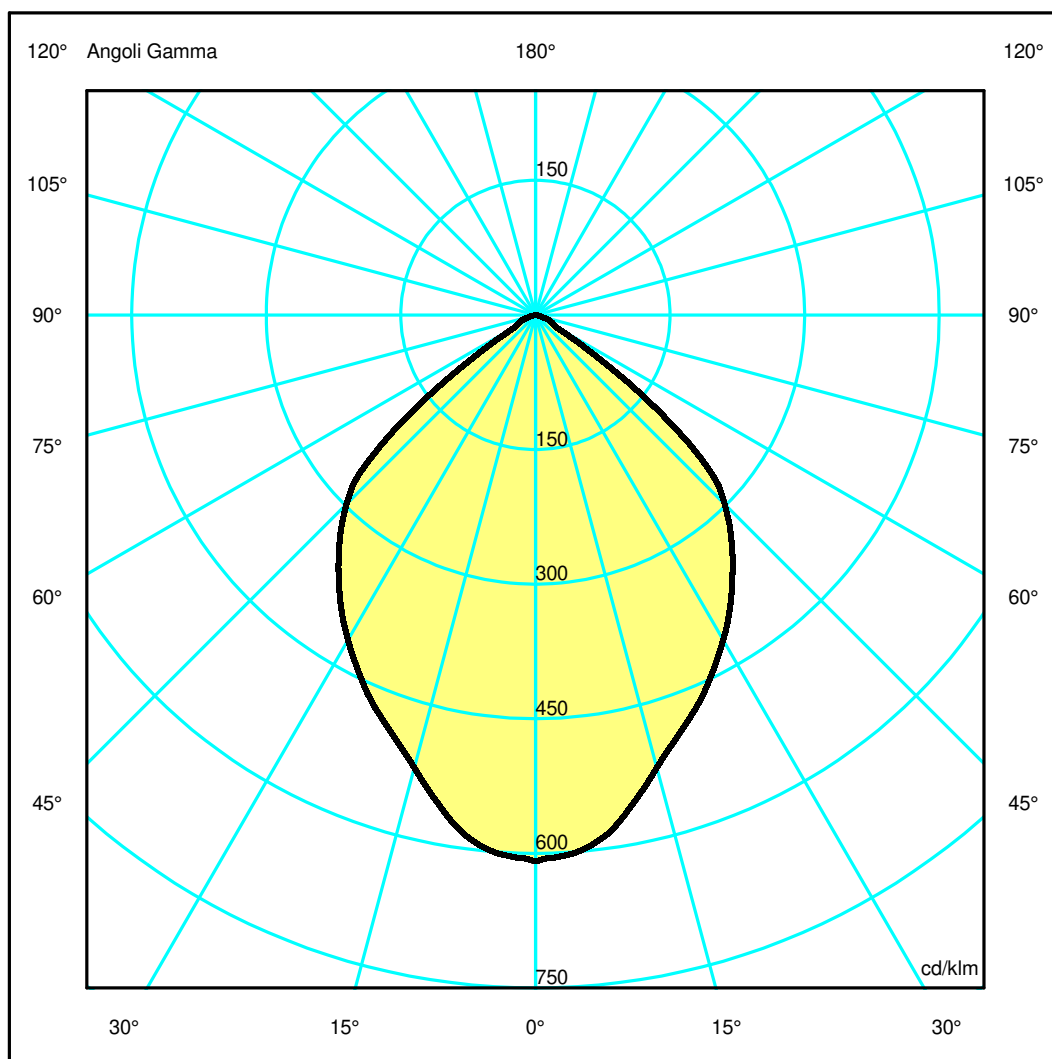

Luminaire

Code 1740050A
Name DEMETRA PROF.LED T CORPO + MD NRO OP.

Measurerm.


Code FTS1601577
Name DEMETRA PROF.LED T CORPO + MD NRO OP.

Luminaire Flux	960 lm	Luminaire Power	12.0 W	Efficacy	80.000 lm/W	Efficiency	100.00%
Source Flux	960 lm	Maximum value	608.87 cd/klm	Position	C=0.00 G=0.00	CG	Rotosymmetrical
Round Luminaire		Diam.	130 mm	Height	25 mm		
Round Luminous Area		Diam.	20 mm	Height	0 mm		
Horizontal Luminous Area		0.000314 m2		Emitting area on Plane 180°		0.000000 m2	
Emitting area on Plane 0°		0.000000 m2		Emitting area on Plane 270°		0.000000 m2	
Emitting area on Plane 90°		0.000000 m2		Glare area at 76°		0.000076 m2	
Coordinate system		CG		Symmetry Type		Rotosymmetrical	
Date		30-06-2016		Maximum Gamma Angle		180	
Measurement Distance		0.00		Measurement Flux		960 lm	
LED Flux=1145lm LED Power=9,3W Eff=84% EfcLed=123lm/W EfcLum=80lm/W Ra=90 SDCM=2 L70(6K)=50000h							
C.I.E.	68 97 100 100 100			D DIN 5040	A50		
F UTE	1.00 C			B NBN	BZ 2		

Width at 50.00 % of Max Intensity

H[m]	1.00	2.00	3.00	4.00	5.00	H[m]	1.00	2.00	3.00	4.00	5.00
OA	0.98	1.95	2.93	3.90	4.88	OC	0.98	1.95	2.93	3.90	4.88
OB	0.98	1.95	2.93	3.90	4.88	OD	0.98	1.95	2.93	3.90	4.88

	Luminous Intensities [cd/klm]									
	0	5	15	25	35	45	55	65	75	85
OA	584.52	574.48	501.40	435.65	365.36	286.11	97.08	20.15	3.49	0.90
OB	584.52	574.48	501.40	435.65	365.36	286.11	97.08	20.15	3.49	0.90
OC	584.52	574.48	501.40	435.65	365.36	286.11	97.08	20.15	3.49	0.90
OD	584.52	574.48	501.40	435.65	365.36	286.11	97.08	20.15	3.49	0.90

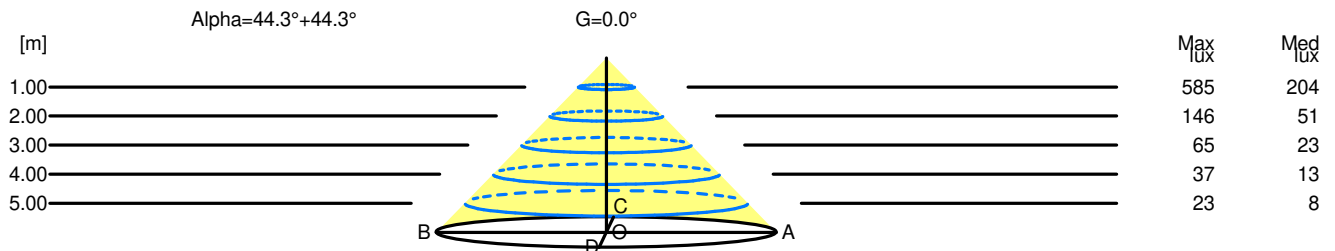

H[m]	D[m]	Max lux	Med lux	Alpha=44.3°+44.3°	G=0.0
1.00	1.95	585	204		
2.00	3.90	146	51		
3.00	5.86	65	23		
4.00	7.81	37	13		
5.00	9.76	23	8		