

**Luminaire**

Code CLOVER

Name CLOVER

**Measurement**

Code 0027FT20


Name CLOVER

Luminaire Flux	1670.50 lm	Luminaire Power	20.50 W	Efficacy	81.49 lm/W	Efficiency	100.00%
Sources Flux	1670.50 lm	Maximum value	356.38 cd/klm	Position	C=0.00 G=180.00	CG	Rotosymmetrical
Round Luminaire		Diam.	700 mm	Height	250 mm		
Round Luminous Area		Diam.	700 mm	Height	250 mm		
Horizontal Luminous Area		0.384845 m2		Emitting area on Plane 180°		0.175000 m2	
Emitting area on Plane 0°		0.175000 m2		Emitting area on Plane 270°		0.175000 m2	
Emitting area on Plane 90°		0.175000 m2		Glare area at 76°		0.262904 m2	
Coordinate system		CG		Symmetry Type		Rotosymmetrical	
Date		20-02-2020		Maximum Gamma Angle		180	
Measurement Distance		0.00		Measurement Flux		1670.50 lm	

**Luminaire Sources**

Line		Flux [lm]	Pow. [W]	Q.ty
Board LED SMD - 500mA - 18W - Nominal Lumen 2300lm - 2700K - CRI80		1670.50	20.50	1
C.I.E.	44 74 93 62 100			
F UTE	0.62 E + 0.38 T			
		D DIN 5040	B31	
		B NBN	BZ 5	

Diam=700mm




C Halfplanes

180.0 ——— 0.0

ULOR 38.47 %

DLOR 61.53 %

RN 38.47 %

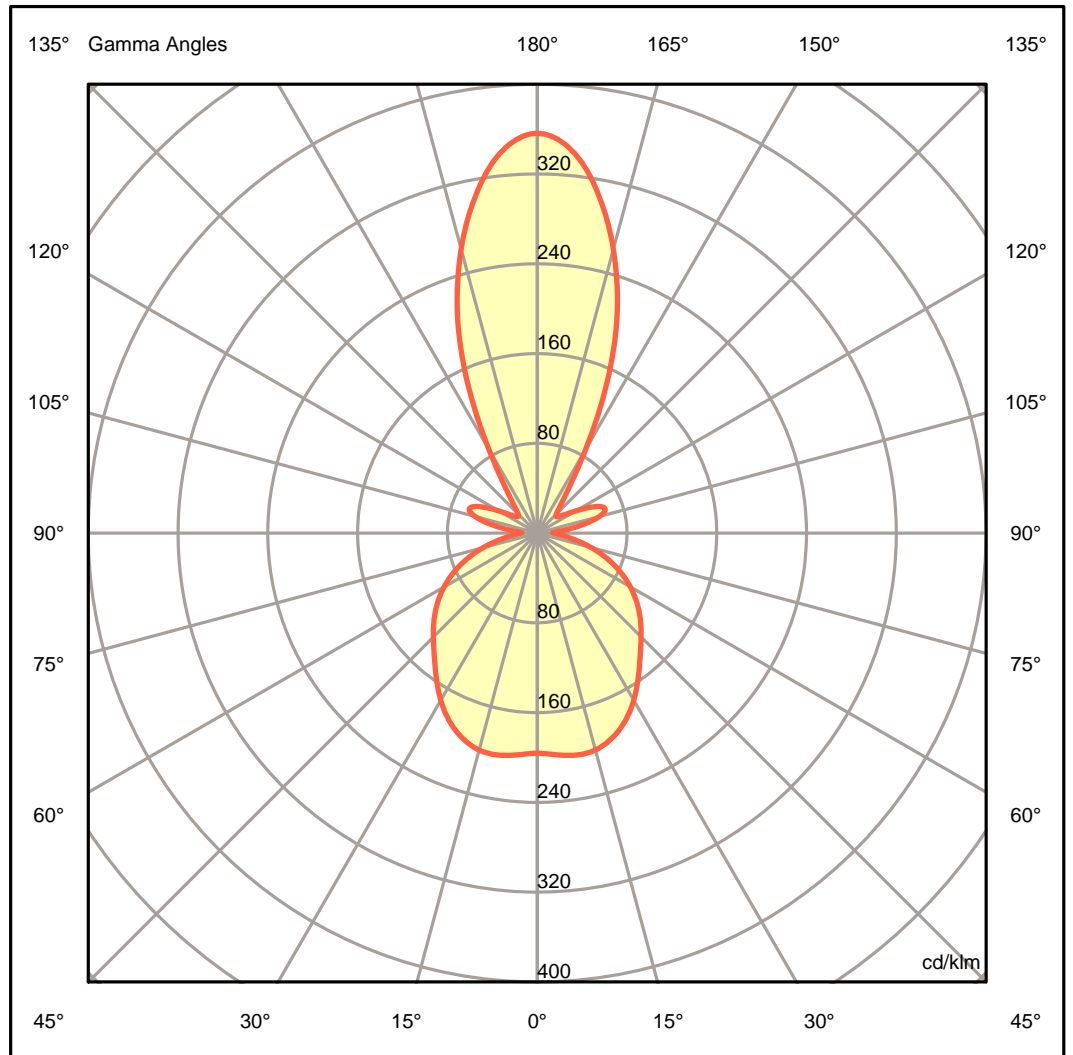



**Luminaire**

Code CLOVER

Name CLOVER

**Measurement**

Code 0027FT20

Name CLOVER

Luminaire Flux	1670.50 lm	Luminaire Power	20.50 W	Efficacy	81.49 lm/W	Efficiency	100.00%
Sources Flux	1670.50 lm	Maximum value	356.38 cd/klm	Position	C=0.00 G=180.00	CG	Rotosymmetrical

Isolux (Floor)

Luminaire position X=0.00m Y=0.00m Z=2.50m

