


Luminaire

Code 1279010A
Name NH S5 ELLITTICA

Measurem.

Code FTS2000223
Name NH S5 ELLITTICA

Luminaire Flux	3312.62 lm	Luminaire Power	43.00 W	Efficacy	77.04 lm/W	Efficiency	76.65%
Lamps Flux	4322.00 lm	Maximum value	103.11 cd/klm	Position	C=0.00 G=0.00	CG	Rotosymmetrical
Round Luminaire Round Luminous Area	Diam. 220 mm Diam. 220 mm	Height	220 mm	Height	220 mm		
Horizontal Luminous Area Emitting area on Plane 0° Emitting area on Plane 90°	0.038013 m2 0.048400 m2 0.048400 m2	Emitting area on Plane 180° Emitting area on Plane 270° Glare area at 76°				0.048400 m2 0.048400 m2 0.056159 m2	
Coordinate system Date Measurement Distance	CG 02-07-2018 0.00	Symmetry Type Maximum Gamma Angle Measurement Flux				Rotosymmetrical 180 4322.00 lm	
C.I.E. F UTE	30 57 80 67 77 0.51 J + 0.26 T	D DIN 5040 B NBN		B11 BZ 7			

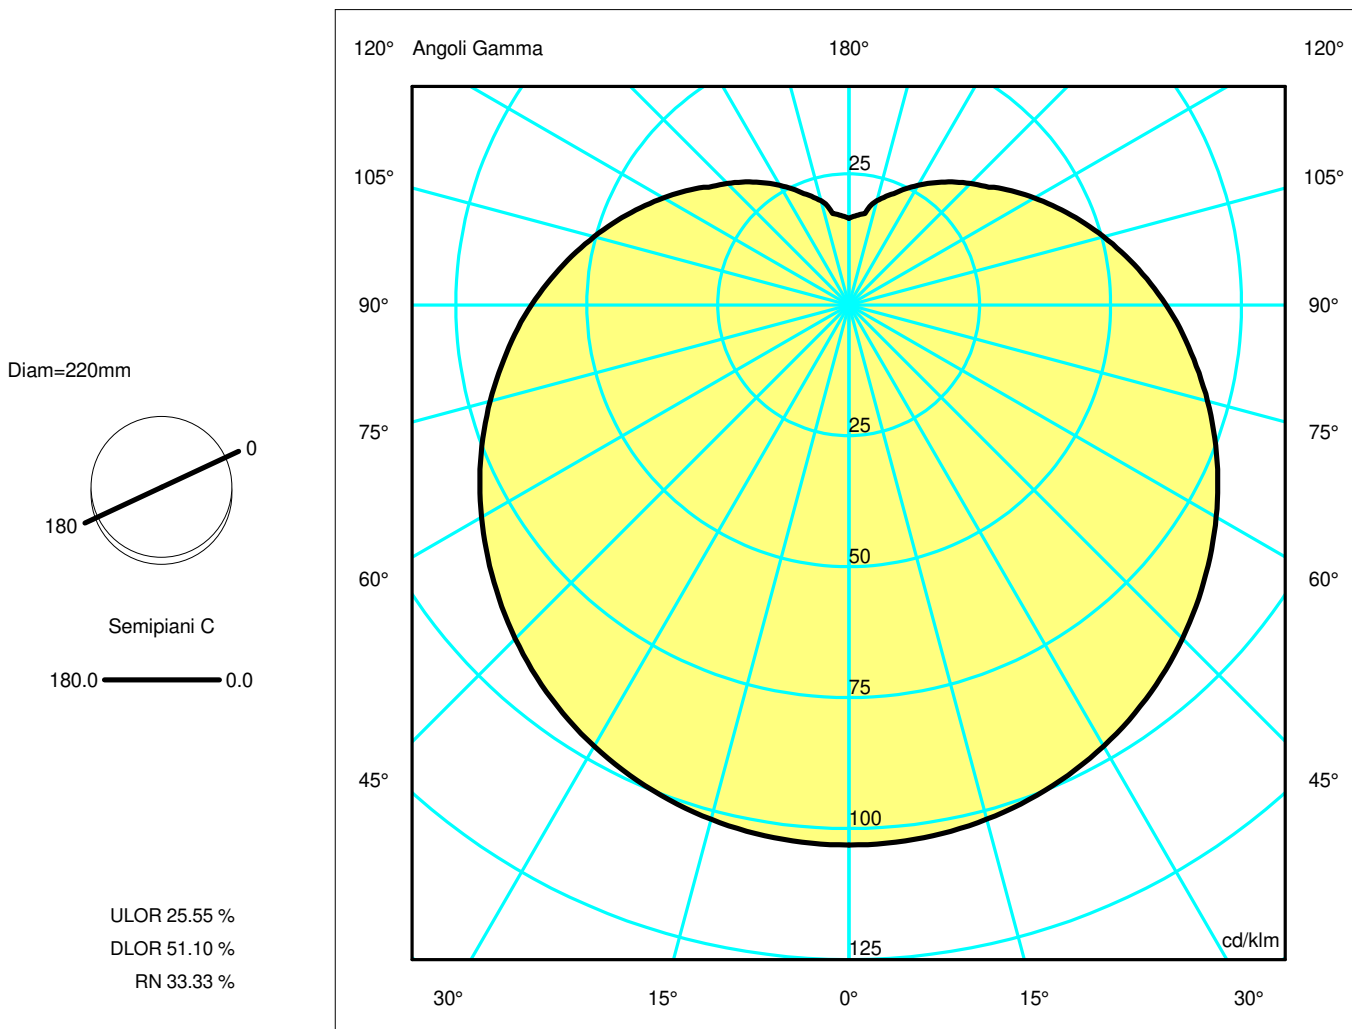

Luminaire

Code 1279010A
Name NH S5 ELLITTICA

Measurem.

Code FTS2000223
Name NH S5 ELLITTICA

Luminaire Flux	3312.62 lm	Luminaire Power	43.00 W	Efficacy	77.04 lm/W	Efficiency	76.65%
Lamps Flux	4322.00 lm	Maximum value	103.11 cd/klm	Position	C=0.00 G=0.00	CG	Rotosymmetrical
Round Luminaire		Diam.	220 mm	Height	220 mm		
Round Luminous Area		Diam.	220 mm	Height	220 mm		
Horizontal Luminous Area		0.038013 m2		Emitting area on Plane 180°		0.048400 m2	
Emitting area on Plane 0°		0.048400 m2		Emitting area on Plane 270°		0.048400 m2	
Emitting area on Plane 90°		0.048400 m2		Glare area at 76°		0.056159 m2	
Coordinate system		CG		Symmetry Type		Rotosymmetrical	
Date		02-07-2018		Maximum Gamma Angle		180	
Measurement Distance		0.00		Measurement Flux		4322.00 lm	
-							
C.I.E.	30 57 80 67 77			D DIN 5040	B11		
F UTE	0.51 J + 0.26 T			B NBN	BZ 7		

Apertura a destra non trovata, gamma =0

Apertura a destra non trovata, gamma =0