

Luminaire


Code A008100
Name TIZIO MICRO TAVOLO LUCIDA

Measur.

Code FTS0002583
Name TIZIO MICRO TAVOLO LUCIDA

Luminaire Flux	152.82 lm	Luminaire Power	20.00 W	Efficacy	7.64 lm/W	Efficiency	47.76%
Lamps Flux	320.00 lm	Maximum value	169.07 cd/klm	Position	C=0.00 G=15.00	CG	Sym. on planes 0-180
Rectangular Luminaire		Length	61 mm	Width	95 mm	Height	55 mm
Rectangular Luminous Area		Length	62 mm	Width	65 mm	Height	0 mm
Horizontal Luminous Area		0.004030 m2		Emitting area on Plane 180°		0.000000 m2	
Emitting area on Plane 0°		0.000000 m2		Emitting area on Plane 270°		0.000000 m2	
Emitting area on Plane 90°		0.000000 m2		Glare area at 76°		0.000975 m2	
Coordinate system		CG		Symmetry Type		Sym. on planes 0-180	
Date		01-08-1995		Maximum Gamma Angle		180	
Measurement Distance		0.00		Measurement Flux		320.00 lm	
HSGS (G4)							
C.I.E.	49 84 98 100 48	D DIN 5040		A30			
F UTE	0.48 E	B NBN		BZ 4			


61mm x 95mm



Semipiani C

180.0 ——— 0.0
270.0 ••••• 90.0

ULOR 0.01 %
DLOR 47.75 %
RN 0.01 %

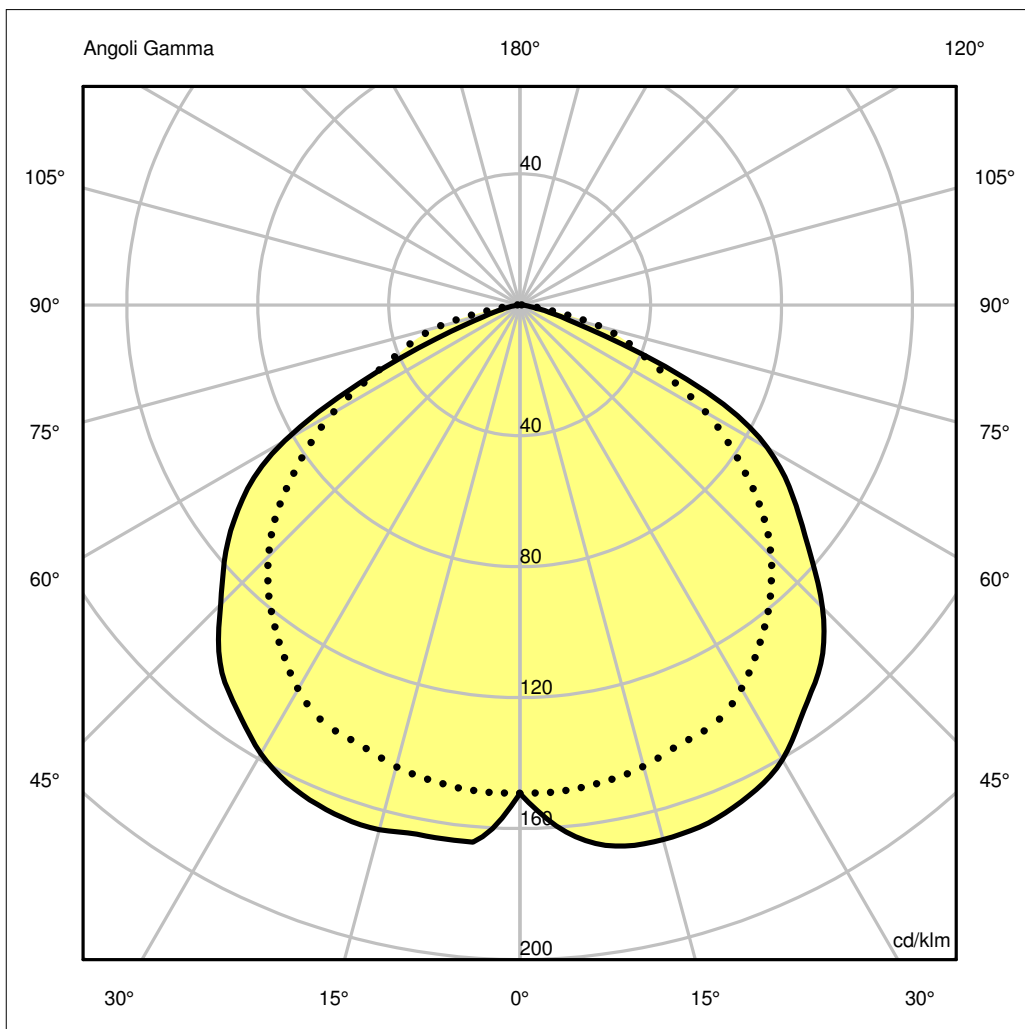

Luminaire

Code A008100
Name TIZIO MICRO TAVOLO LUCIDA

Measur.

Code FTS0002583
Name TIZIO MICRO TAVOLO LUCIDA


Luminaire Flux	152.82 lm	Luminaire Power	20.00 W	Efficacy	7.64 lm/W	Efficiency	47.76%
Lamps Flux	320.00 lm	Maximum value	169.07 cd/klm	Position	C=0.00 G=15.00	CG Sym. on planes 0-180	
Rectangular Luminaire		Length	61 mm	Width	95 mm	Height	55 mm
Rectangular Luminous Area		Length	62 mm	Width	65 mm	Height	0 mm
Horizontal Luminous Area	0.004030 m2	Emitting area on Plane 180°				0.000000 m2	
Emitting area on Plane 0°	0.000000 m2	Emitting area on Plane 270°				0.000000 m2	
Emitting area on Plane 90°	0.000000 m2	Glare area at 76°				0.000975 m2	
Coordinate system	CG	Symmetry Type				Sym. on planes 0-180	
Date	01-08-1995	Maximum Gamma Angle				180	
Measurement Distance	0.00	Measurement Flux				320.00 lm	
HSGS (G4)							
C.I.E.	49 84 98 100 48	D DIN 5040		A30			
F UTE	0.48 E	B NBN		BZ 4			

Width at 50.00 % of Max Intensity

H[m]	1.00	2.00	3.00	4.00	5.00	H[m]	1.00	2.00	3.00	4.00	5.00
OA	1.79	3.57	5.36	7.14	8.93	OC	1.37	2.73	4.10	5.47	6.83
OB	1.71	3.42	5.14	6.85	8.56	OD	1.37	2.73	4.10	5.47	6.83

Luminous Intensities [cd/klm]

	0	5	15	25	35	45	55	65	75	85
OA	47.77	51.71	54.10	52.94	48.39	41.83	32.57	20.14	3.55	0.39
OB	47.77	52.71	53.10	52.17	48.24	41.37	33.11	15.13	2.16	0.15
OC	47.77	47.73	46.73	45.14	40.76	34.74	25.90	15.24	8.07	0.74
OD	47.77	47.73	46.73	45.14	40.76	34.74	25.90	15.24	8.07	0.74

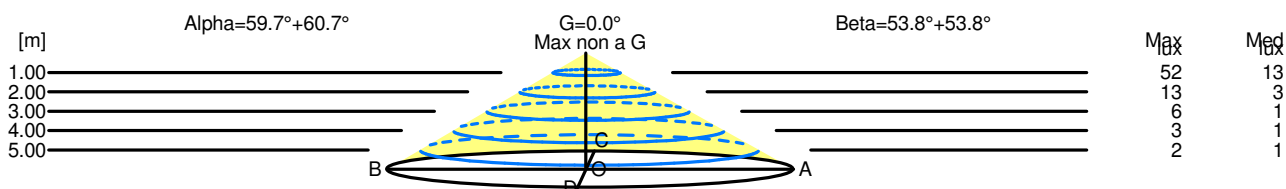

H[m]	D[m]	Max lux	Med lux	Alpha=59.7°+60.7°	G=0.0 Max non a G
1.00	3.50	52	13		
2.00	7.00	13	3		
3.00	10.49	6	1		
4.00	13.99	3	1		
5.00	17.49	2	1		

H[m]	D[m]	Max lux	Med lux	Beta=53.8°+53.8°	G=0.0 Max non a G
1.00	2.73	52	13		
2.00	5.47	13	3		
3.00	8.20	6	1		
4.00	10.93	3	1		
5.00	13.67	2	1		