



## SLC DL04 SURFACE X1 R83 WH 703TED 930 IP21 36°

14/01/2022

### SLC1222



### Product description

The DL04 Surface X1 is an angular, tiltable surface-mounted luminaire with a contemporary design. Experience pleasant light with low glare and plenty of lumens.

- Delivery complete with driver
- Deep LED for a pleasant light UGR <22
- Angular swivel surface-mounted luminaire in contemporary design
- Quick coupling with loop-in / loop-out
- CRI >90 enhances vivid colors in any environment
- Delivers plenty of light (655lm)
- 16mm cable tube



### Technical data

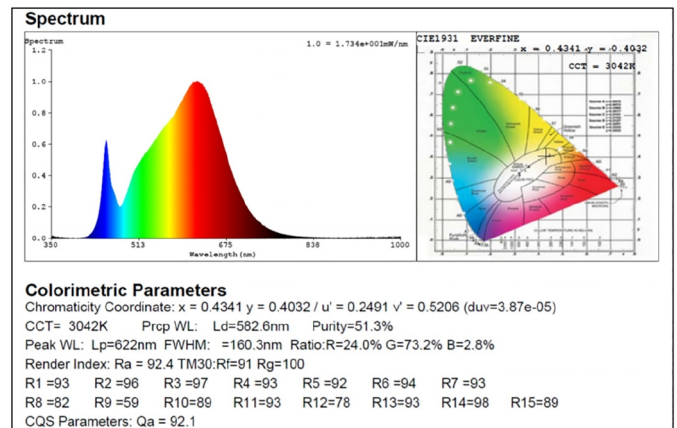
Suitable for surface mounting	Yes	Suitable for ceiling mounting	Yes
Adjustability	Rotating and swivelling	Lamp type	LED not exchangeable
With light source	Yes	Material housing	Aluminium
Colour housing	White	Material cover	Plastic, transparent
Voltage type	AC	Nominal voltage	220 - 240 V
LED nominal current at constant current	200 - 200 mA	Control gear included	Yes
Dimming phase cut-off	Yes	Reflector	High-gloss
Light distributor	Reflector	Light sharing	Symmetric
Beam angle	Medium beam 21-40°	Light outlet	Direct
Rated life time L90/B10 at 25 °C	100000 h	Degree of protection (IP)	IP21







Protection class	I
Max. system power	8 W
Colour temperature	3000 - 3000 K
Rated luminous flux according to IEC 62722-	703 lm
Width	135 mm
Length	135 mm
Number of poles	2
Connectable conductor cross section	1,5 - 2,5 mm <sup>2</sup>
Luminaire efficacy	95 lm/W
Strain relief	Yes
Beam angle (°)	36
Glare (UGR)	UGR<22
Dimmable	Yes
Brand	SLC
Produced by	The Light Group

Rated ambient temperature according to IEC	-20 - 45 °C
Colour of light	White
Colour rendering index CRI	90-100
Lamp efficacy	95 lm/W
Height/depth	60 mm
Type of wiring	Suitable for through wiring
Conductor cross section	0,35 mm <sup>2</sup>
Connection type	Plug clamp
Colour consistency (McAdam ellipse)	SDCM3
Colour rendering index (CRI/Ra)	90
Tilt-able (°)	25
Dimming method	Trailing edge
Dimming range	1-100%
GTIN	7070938065405







 **ENERG** 


Scandinavian Lighting Concept  
SLC1222


---

A 

B 

C 

D 


E  

F 

G 

---

**7**  
kWh/1000h

 2019/2015

