



WEVER & DUCRÉ  
LIGHTING

# VENN 2.0

149284W2

Project
Type
Notes
Quantity
Date

## GENERAL

Wall
Surface
Signal White
IP20
Interior
Indirect 3030 lm
Direct 455 lm
Total 3485 lm
9003 <sup>a</sup>

## LED

2700 K
CRI 80
L90 / 50000 h
3-step binning

## OPTICAL

Opal
------




## PHYSICAL

Length 724 mm
Width 724 mm
Height 90 mm
2.5 kg


## ELECTRICAL

incl. PS   phase-cut dim
220 - 240 V
Total connected power 46 W
PC1
Safety distance 0.3 m

<sup>a</sup> RAL Palette colors may deviate slightly due to production conditions.

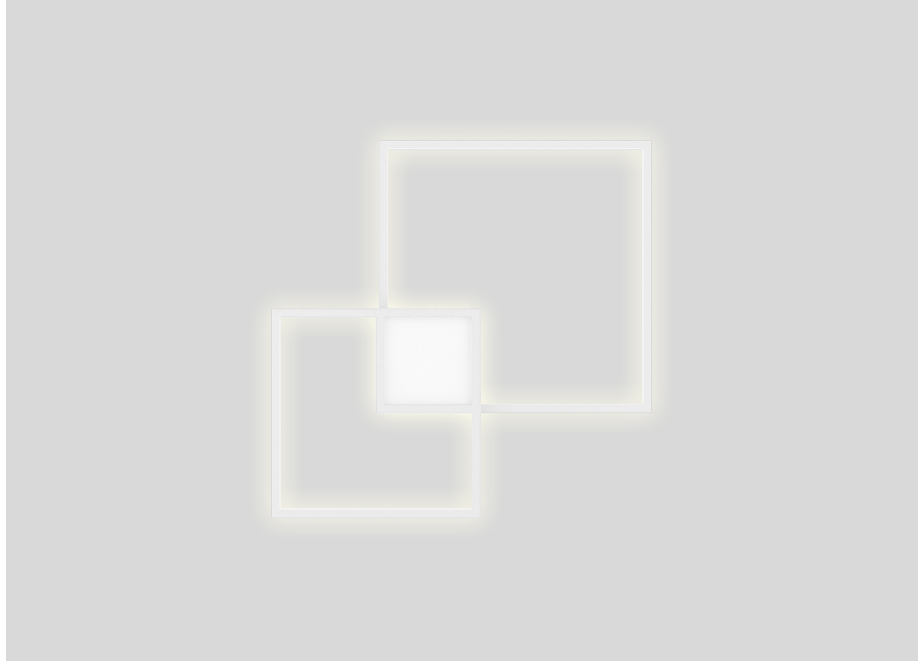

## LIGHT DISTRIBUTION





WEVER & DUCRÉ  
LIGHTING

# VENN 2.0

149284W2

## Maintenance Factors

Operating Time [h]	10 000	20 000	30 000	40 000	50 000
LLMF	0.98	0.96	0.94	0.91	0.9
LSF	1	1	1	1	1

MF	$LMF \times RSMF \times LLMF \times LSF$	RSMF <sup>a</sup>	Room Surface Maintenance Factor
MF	Maintenance Factor	LLMF	Lamp Lumens Maintenance Factor
LMF <sup>a</sup>	Luminaire Maintenance Factor	LSF	Lamp Survival Faktor

<sup>a</sup> According to "CIE 97, Maintenance of indoor electric lighting systems", 2005, ISBN 3-900-734-34-8. The values must be determined by the planner.