

Luminaire


Code 0693020A
Name LOGICO MINI PLAFONE 3X120°

Measurement

Code FTS0002509
Name LOGICO MINI PLAFONE 3X120°

Luminaire Flux	3250.41 lm	Luminaire Power	70.00 W	Efficacy	46.43 lm/W	Efficiency	91.82%
Lamps Flux	3540.00 lm	Maximum value	136.82 cd/klm	Position	C=75.00 G=30.00	CG	Asymmetrical
Round Luminaire		Diam.	450 mm	Height	230 mm		
Round Luminous Area		Diam.	450 mm	Height	230 mm		
Horizontal Luminous Area	0.159043 m2			Emitting area on Plane 180°		0.103500 m2	
Emitting area on Plane 0°	0.103500 m2			Emitting area on Plane 270°		0.103500 m2	
Emitting area on Plane 90°	0.103500 m2			Glare area at 76°		0.138902 m2	
Coordinate system	CG			Symmetry Type		Asymmetrical	
Date	02-09-2002			Maximum Gamma Angle		180	
Measurement Distance	0.00			Measurement Flux		3540.00 lm	
70W HSGST E27							
C.I.E.	31 54 77 58 92			D DIN 5040	C21		
F UTE	0.54 H + 0.38 T			B NBN	BZ 7		


Diam=450mm

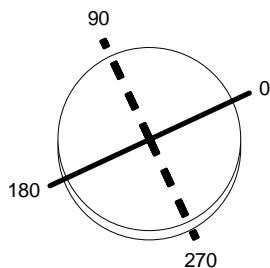

Semipiani C

180.0 ——— 0.0
270.0 - - - - 90.0

ULOR 38.21 %
DLOR 53.61 %
RN 41.62 %

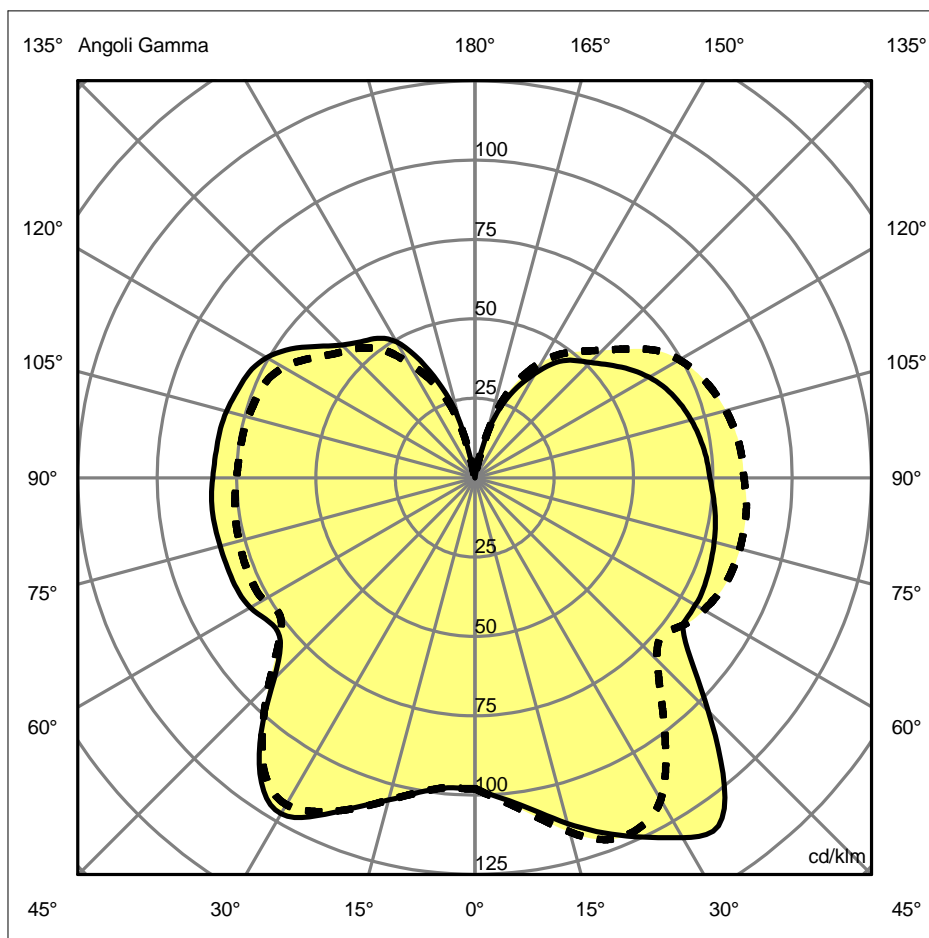

Luminaire

Code 0693020A
Name LOGICO MINI PLAFONE 3X120°

Measur.

Code FTS0002509
Name LOGICO MINI PLAFONE 3X120°

Luminaire Flux	3250.41 lm	Luminaire Power	70.00 W	Efficacy	46.43 lm/W	Efficiency	91.82%
Lamps Flux	3540.00 lm	Maximum value	136.82 cd/klm	Position	C=75.00 G=30.00	CG	Asymmetrical
Round Luminaire		Diam.	450 mm	Height	230 mm		
Round Luminous Area		Diam.	450 mm	Height	230 mm		
Horizontal Luminous Area		0.159043 m2		Emitting area on Plane 180°		0.103500 m2	
Emitting area on Plane 0°		0.103500 m2		Emitting area on Plane 270°		0.103500 m2	
Emitting area on Plane 90°		0.103500 m2		Glare area at 76°		0.138902 m2	
Coordinate system		CG		Symmetry Type		Asymmetrical	
Date		02-09-2002		Maximum Gamma Angle		180	
Measurement Distance		0.00		Measurement Flux		3540.00 lm	
70W HSGST E27							
C.I.E.	31 54 77 58 92			D DIN 5040	C21		
F UTE	0.54 H + 0.38 T			B NBN	BZ 7		

Apertura a destra non trovata, gamma =34

Apertura a destra non trovata, gamma =34

Apertura a destra non trovata, gamma =34

Luminaire

Code 0693020A
Name LOGICO MINI PLAFONE 3X120°

Measurement

Code FTS0002509
Name LOGICO MINI PLAFONE 3X120°

Luminaire Flux	3250.41 lm	Luminaire Power	70.00 W	Efficacy	46.43 lm/W	Efficiency	91.82%
Lamps Flux	3540.00 lm	Maximum value	136.82 cd/klm	Position	C=75.00 G=30.00	CG	Asymmetrical

UGR
S = 0.250

Reflectancies										
Ceiling/Cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
WorkingPlane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
RoomDimensions	ViewedCrosswise					ViewedEndwise				
x=2H y=2H	10.9	11.9	11.8	12.8	13.7	10.9	11.9	11.7	12.7	13.7
x=2H y=3H	13.7	14.7	14.6	15.5	16.4	13.5	14.4	14.4	15.3	16.4
x=2H y=4H	15.2	16.1	16.1	17.0	17.8	14.9	15.8	15.8	16.7	17.8
x=2H y=6H	16.7	17.5	17.6	18.4	19.2	16.4	17.2	17.2	18.0	19.2
x=2H y=8H	17.5	18.3	18.4	19.1	19.9	17.1	17.8	18.0	18.7	19.9
x=2H y=12H	18.2	19.0	19.1	19.9	20.6	17.8	18.5	18.7	19.4	20.6
x=4H y=2H	11.9	12.7	12.7	13.6	14.5	11.7	12.6	12.6	13.4	14.5
x=4H y=3H	14.8	15.5	15.7	16.4	17.3	14.6	15.3	15.4	16.2	17.3
x=4H y=4H	16.4	17.1	17.3	18.0	18.8	16.1	16.8	17.0	17.7	18.8
x=4H y=6H	18.0	18.6	19.0	19.6	20.4	17.7	18.3	18.6	19.2	20.4
x=4H y=8H	18.9	19.4	19.8	20.4	21.2	18.5	19.1	19.4	20.0	21.2
x=4H y=12H	19.7	20.2	20.7	21.2	22.0	19.3	19.8	20.3	20.8	22.0
x=8H y=4H	17.0	17.5	17.9	18.5	19.3	16.7	17.2	17.6	18.2	19.3
x=8H y=6H	18.8	19.3	19.8	20.3	21.1	18.5	19.0	19.5	19.9	21.1
x=8H y=8H	19.8	20.2	20.8	21.2	22.1	19.5	19.9	20.4	20.8	22.1
x=8H y=12H	20.8	21.2	21.8	22.2	23.0	20.5	20.8	21.4	21.8	23.0
x=12H y=4H	17.1	17.6	18.1	18.6	19.4	16.8	17.3	17.7	18.2	19.4
x=12H y=6H	19.1	19.5	20.0	20.4	21.3	18.7	19.1	19.7	20.1	21.3
x=12H y=8H	20.1	20.5	21.1	21.5	22.3	19.8	20.1	20.7	21.1	22.3