

## Luminaire

Code 1052010A  
Name CASTORE SOSPENSIONE 350

## Measur.

Code FTS0002068  
Name CASTORE SOSPENSIONE 350

Efficiency	84.71%	Coordinate system	CG	Total Flux	2870.00 lm
Maximum value	72.47 cd/klm	Position	C=0.00 G=15.00	Rotosymmetrical	
Round Luminaire	Diam. 350 mm	Height	350 mm		
Round Luminous Area	Diam. 350 mm	Height	350 mm		
Horizontal Luminous Area	0.096211 m <sup>2</sup>	Emitting area on Plane 180°	0.122500 m <sup>2</sup>		
Emitting area on Plane 0°	0.122500 m <sup>2</sup>	Emitting area on Plane 270°	0.122500 m <sup>2</sup>		
Emitting area on Plane 90°	0.122500 m <sup>2</sup>	Glare area at 76°	0.142137 m <sup>2</sup>		
Date	11-11-2014	Maximum Gamma Angle	180		
Measurement Distance	0.00	Measurement Flux	2870.00 lm		
64402					
C.I.E.	25 50 75 54 85	D DIN 5040	C11		
F UTE	0.45 J + 0.39 T	B NBN	BZ 8		


Diam=350mm



Semipiani C

180.0 ——— 0.0

ULOR 39.34 %  
DLOR 45.37 %  
RN 46.44 %

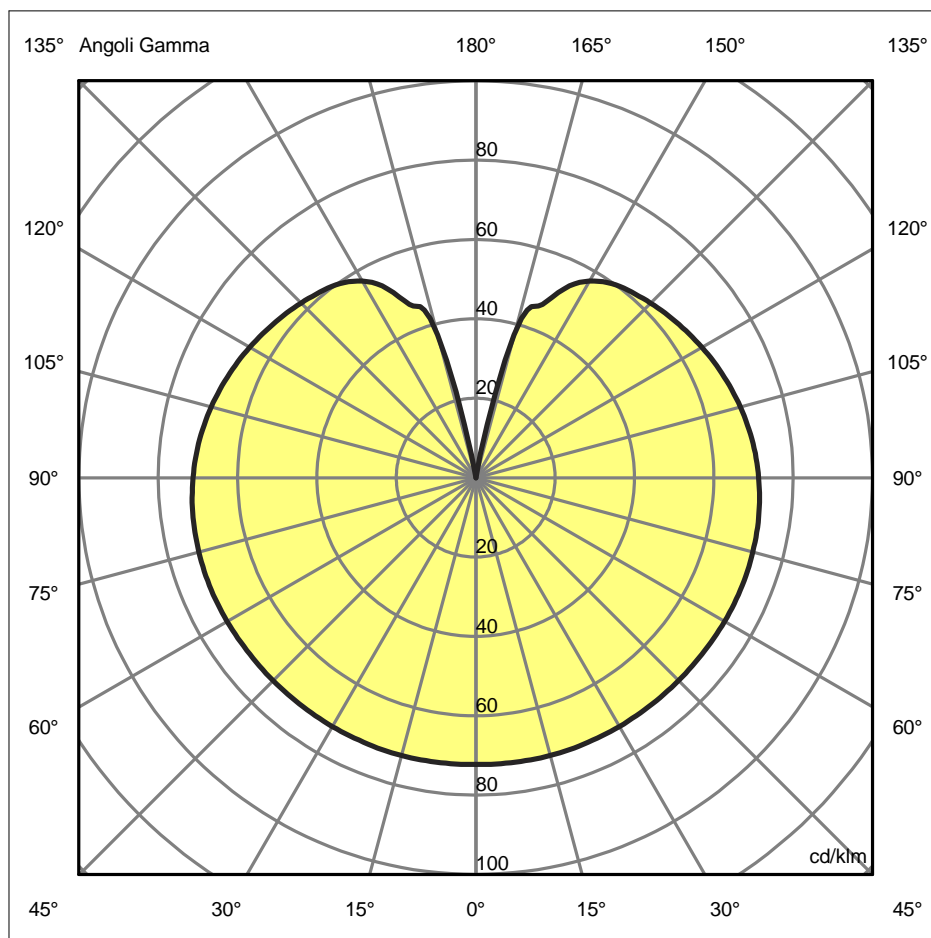

**Luminaire**

Code 1052010A  
Name CASTORE SOSPENSIONE 350

**Measurement**

Code FTS0002068  
Name CASTORE SOSPENSIONE 350

Efficiency	84.71%	Coordinate system	CG	Total Flux	2870.00 lm
Maximum value	72.47 cd/klm	Position	C=0.00 G=15.00	Rotosymmetrical	
Round Luminaire	Diam.	350 mm	Height	350 mm	
Round Luminous Area	Diam.	350 mm	Height	350 mm	
Horizontal Luminous Area	0.096211 m2	Emitting area on Plane 180°		0.122500 m2	
Emitting area on Plane 0°	0.122500 m2	Emitting area on Plane 270°		0.122500 m2	
Emitting area on Plane 90°	0.122500 m2	Glare area at 76°		0.142137 m2	
Date	11-11-2014	Maximum Gamma Angle		180	
Measurement Distance	0.00	Measurement Flux		2870.00 lm	
64402					
C.I.E.	25 50 75 54 85	D DIN 5040		C11	
F UTE	0.45 J + 0.39 T	B NBN		BZ 8	

Apertura a destra non trovata, gamma =18

Apertura a destra non trovata, gamma =18