

Ultrathin Series


Constant Current LED Driver

LED恒流驱动器

Features:

- Independent ultrathin design
- Captured terminal screws
- Protections: opencircuit, shortcircuit, overload, overtemperature
- SELV equivalent
- Protection class II

- 独立式超薄紧凑设计
- 输入输出螺丝锁紧接线端子
- 输出开路, 短路, 过载和超温保护
- 符合安全特低电压标准
- 保护等级 II

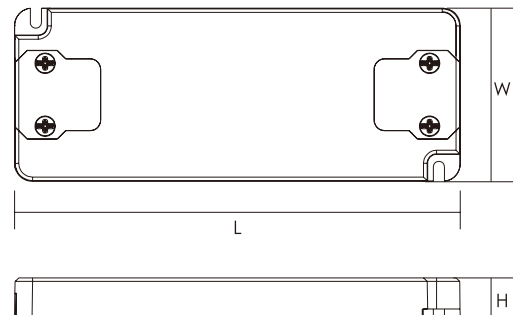

Parameters:

Model No. 型号	Input voltage 额定电压 (V)	Max. output 功率 (W)	Output current 输出电流 (mA)	Output voltage 输出电压 (V)	Power factor 功率因数 (λ)	Efficiency full load 效率 (%)	No-load power 空载功率 (W)	Ambient temperature 环境温度 ta (°C)	Max. casing temperature 最大外壳温度 tc (°C)	Isolation 隔离	Dimensions LxWxH 尺寸 (mm)	Weight 重量 (g)
UT350mA/6W	220-240	6	350	2-18	0.50C	77	<0.3	-20...+50	80	SELV	98x46x11	45
UT500mA/6W	220-240	6	500	2-12	0.50C	75	<0.3	-20...+50	80	SELV	98x46x11	45
UT700mA/6W	220-240	6	700	2-9	0.50C	74	<0.3	-20...+50	80	SELV	98x46x11	45
UT350mA/12W	220-240	12	350	2-35	0.50C	83	<0.3	-20...+50	80	SELV	128x50x13	70
UT500mA/12W	220-240	12	500	2-24	0.50C	81	<0.3	-20...+50	80	SELV	128x50x13	70
UT700mA/12W	220-240	12	700	2-17	0.50C	80	<0.3	-20...+50	80	SELV	128x50x13	70
UT350mA/20W	220-240	20	350	2-57	0.50C	86	<0.3	-20...+40	85	SELV	128x50x13	75
UT500mA/20W	220-240	20	500	2-40	0.50C	85	<0.3	-20...+40	85	SELV	128x50x13	75
UT700mA/20W	220-240	20	700	2-29	0.50C	85	<0.3	-20...+40	85	SELV	128x50x13	75


CB CE