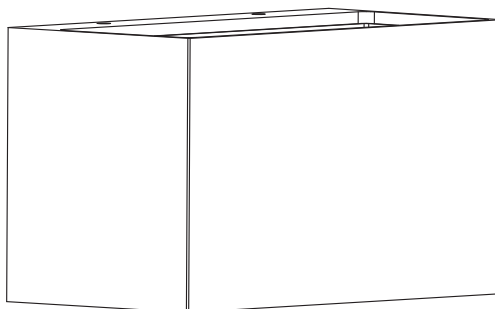
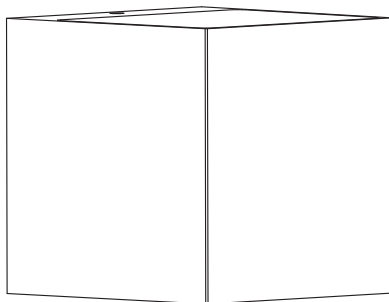




SMART⁺ WIFI BRICK



	EAN	W	lm	K	Δ (°C)	V~	mA	Hz	PF
SMART OUTD WIFI BRICK RGBW DG	4058075564367	14	550	3000	-20...+40	220-240	60	50/60	>0.5
SMART OUTD WIFI BRICK WIDE RGBW DG	4058075564404	14	600	3000	-20...+40	220-240	95	50/60	>0.5
SMART OUTD WIFI BRICK RGBW ST	4058075564428	14	550	3000	-20...+40	220-240	60	50/60	>0.5
SMART OUTD WIFI BRICK WIDE RGBW ST	4058075564442	14	600	3000	-20...+40	220-240	95	50/60	>0.5

	530 g		692 g
	4058075564367		4058075564404
	590 g		762 g
	4058075564428		4058075564442

1x

2x

2x

4x

4x

mm

L

W

H

	L	W	H
WIFI BRICK	85	85	85
WIFI BRICK WIDE	75	145	85

1

↑ ON

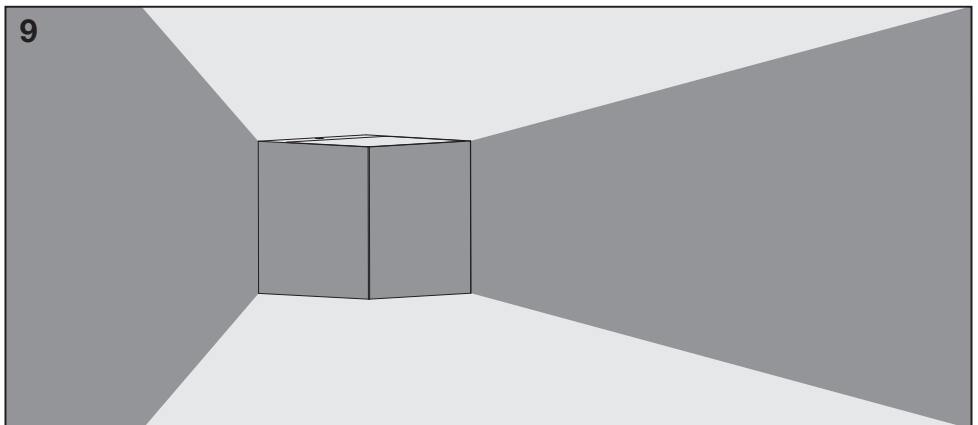
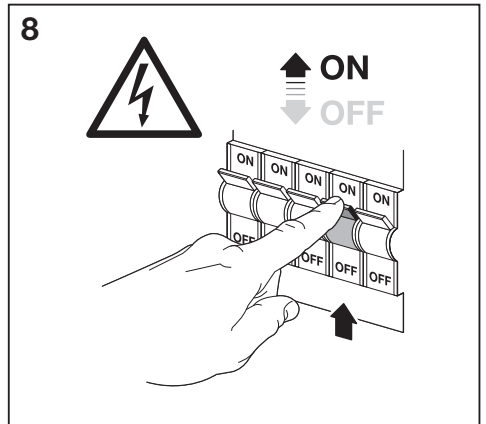
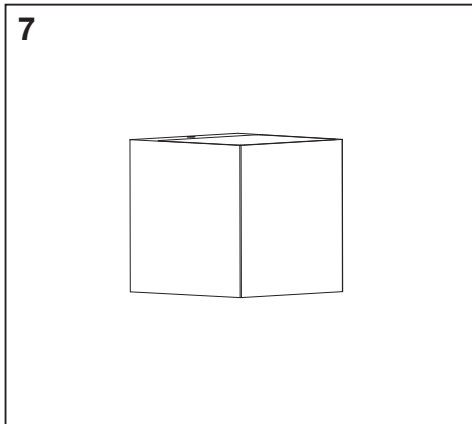
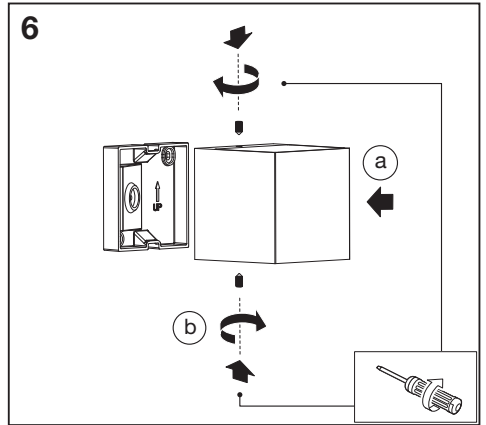
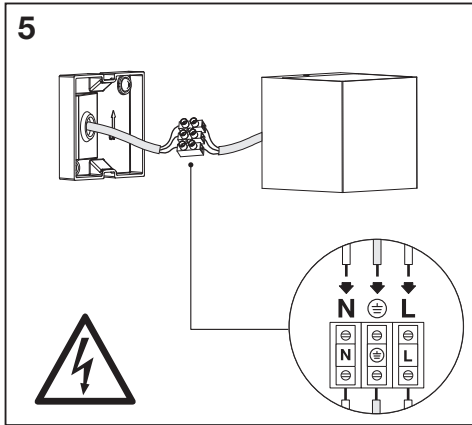
↓ OFF





2


3

ø 6mm

4



	EAN	This product contains a light source of energy efficiency class	Contained Light Source
SMART OUTD WIFI BRICK RGBW DG	4058075564367	F	
SMART OUTD WIFI BRICK WIDE RGBW DG	4058075564404	F	
SMART OUTD WIFI BRICK RGBW ST	4058075564428	F	
SMART OUTD WIFI BRICK WIDE RGBW ST	4058075564442	F	



IP44

C10449057
G11111541
04.05.2021



LEDVANCE GmbH
Steinerne Furt 62
86167 Augsburg, Germany
www.ledvance.com