

## Luminaire


Code 1692010A  
Name MENDORI dimmerabile

## Measuram.


Code FTS0002312  
Name MENDORI dimmerabile

Luminaire Flux	425.44 lm	Luminaire Power	10.00 W	Efficacy	42.54 lm/W	Efficiency	100.00%
Lamps Flux	425.44 lm	Maximum value	334.78 cd/klm	Position	C=275.00 G=174.00	CG	Asymmetrical
Rectangular Luminaire		Length	560 mm	Width	450 mm	Height	500 mm
Rectangular Luminous Area		Length	560 mm	Width	450 mm	Height	500 mm
Horizontal Luminous Area		0.252000 m2		Emitting area on Plane 180°		0.280000 m2	
Emitting area on Plane 0°		0.280000 m2		Emitting area on Plane 270°		0.225000 m2	
Emitting area on Plane 90°		0.225000 m2		Glare area at 76°		0.332647 m2	
Coordinate system		CG		Symmetry Type		Asymmetrical	
Date		29-11-2012		Maximum Gamma Angle		180	
Measurement Distance		0.00		Measurement Flux		425.44 lm	
Led CREE							
C.I.E.	10 32 62 26 100			D DIN 5040		D13	
F UTE	--			B NBN		BZ 10	

560mm x 450mm



ULOR 73.52 %  
DLOR 26.48 %  
RN 73.52 %

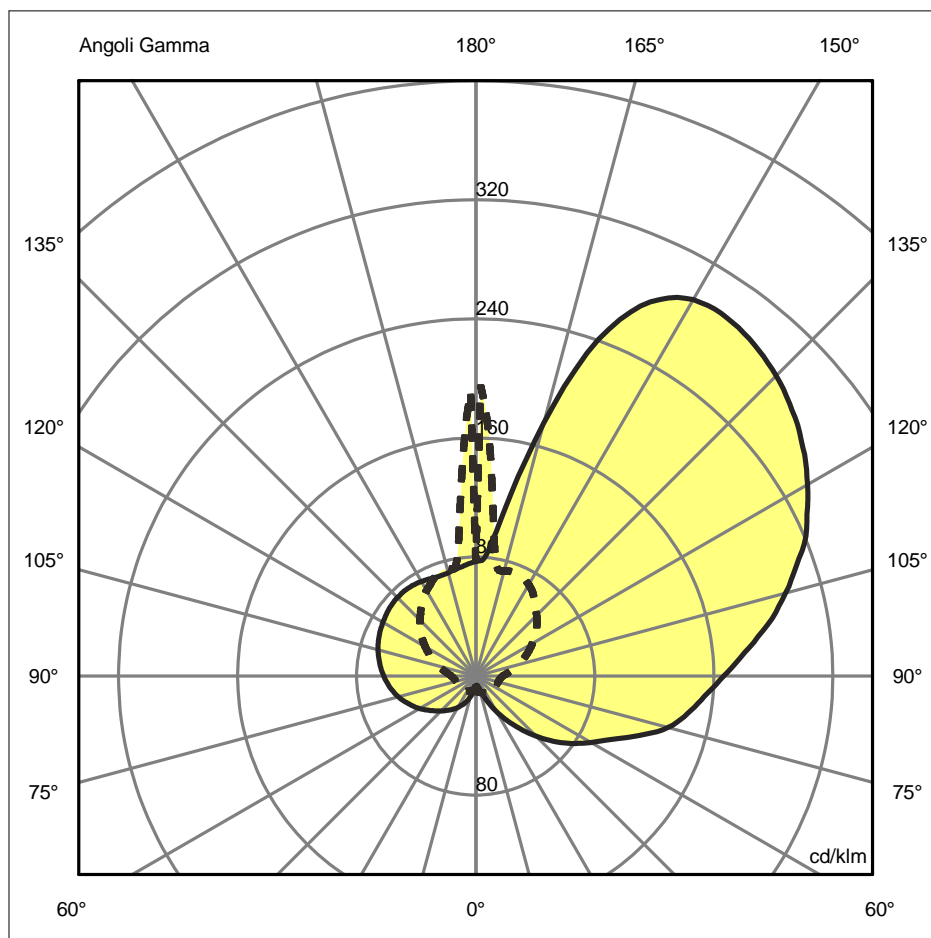

**Luminaire**

Code 1692010A  
Name MENDORI dimmerabile

**Measur.**

Code FTS0002312  
Name MENDORI dimmerabile

Luminaire Flux	425.44 lm	Luminaire Power	10.00 W	Efficacy	42.54 lm/W	Efficiency	100.00%
Lamps Flux	425.44 lm	Maximum value	334.78 cd/klm	Position	C=275.00 G=174.00	CG	Asymmetrical
Rectangular Luminaire Rectangular Luminous Area		Length Length	560 mm 560 mm	Width Width	450 mm 450 mm	Height Height	500 mm 500 mm
Horizontal Luminous Area		0.252000 m2		Emitting area on Plane 180°		0.280000 m2	
Emitting area on Plane 0°		0.280000 m2		Emitting area on Plane 270°		0.225000 m2	
Emitting area on Plane 90°		0.225000 m2		Glare area at 76°		0.332647 m2	
Coordinate system		CG		Symmetry Type		Asymmetrical	
Date		29-11-2012		Maximum Gamma Angle		180	
Measurement Distance		0.00		Measurement Flux		425.44 lm	
Led CREE							
C.I.E.	10 32 62 26 100			D DIN 5040	D13		
F UTE	--			B NBN	BZ 10		

Apertura a destra non trovata, gamma =34

Apertura a destra non trovata, gamma =34

Apertura a destra non trovata, gamma =34