

Luminaire


Code A005010
Name TIZIO TAVOLO 35

Measur.

Code FTS0002584
Name TIZIO TAVOLO 35

Luminaire Flux	410.70 lm	Luminaire Power	35.00 W	Efficacy	11.73 lm/W	Efficiency	47.76%
Lamps Flux	860.00 lm	Maximum value	169.07 cd/klm	Position	C=0.00 G=15.00	CG	Sym. on planes 0-180
Rectangular Luminaire		Length	74 mm	Width	100 mm	Height	56 mm
Rectangular Luminous Area		Length	67 mm	Width	65 mm	Height	0 mm
Horizontal Luminous Area	0.004355 m2	Emitting area on Plane 180°			0.000000 m2		
Emitting area on Plane 0°	0.000000 m2	Emitting area on Plane 270°			0.000000 m2		
Emitting area on Plane 90°	0.000000 m2	Glare area at 76°			0.001054 m2		
Coordinate system	CG	Symmetry Type			Sym. on planes 0-180		
Date	01-08-1995	Maximum Gamma Angle			180		
Measurement Distance	0.00	Measurement Flux			860.00 lm		
64432 ECO							
C.I.E.	49 84 98 100 48	D DIN 5040		A30			
F UTE	0.48 E	B NBN		BZ 4			


74mm x 100mm



Semipiani C

180.0 ——— 0.0
270.0 ••••• 90.0

ULOR 0.01 %
DLOR 47.75 %
RN 0.01 %

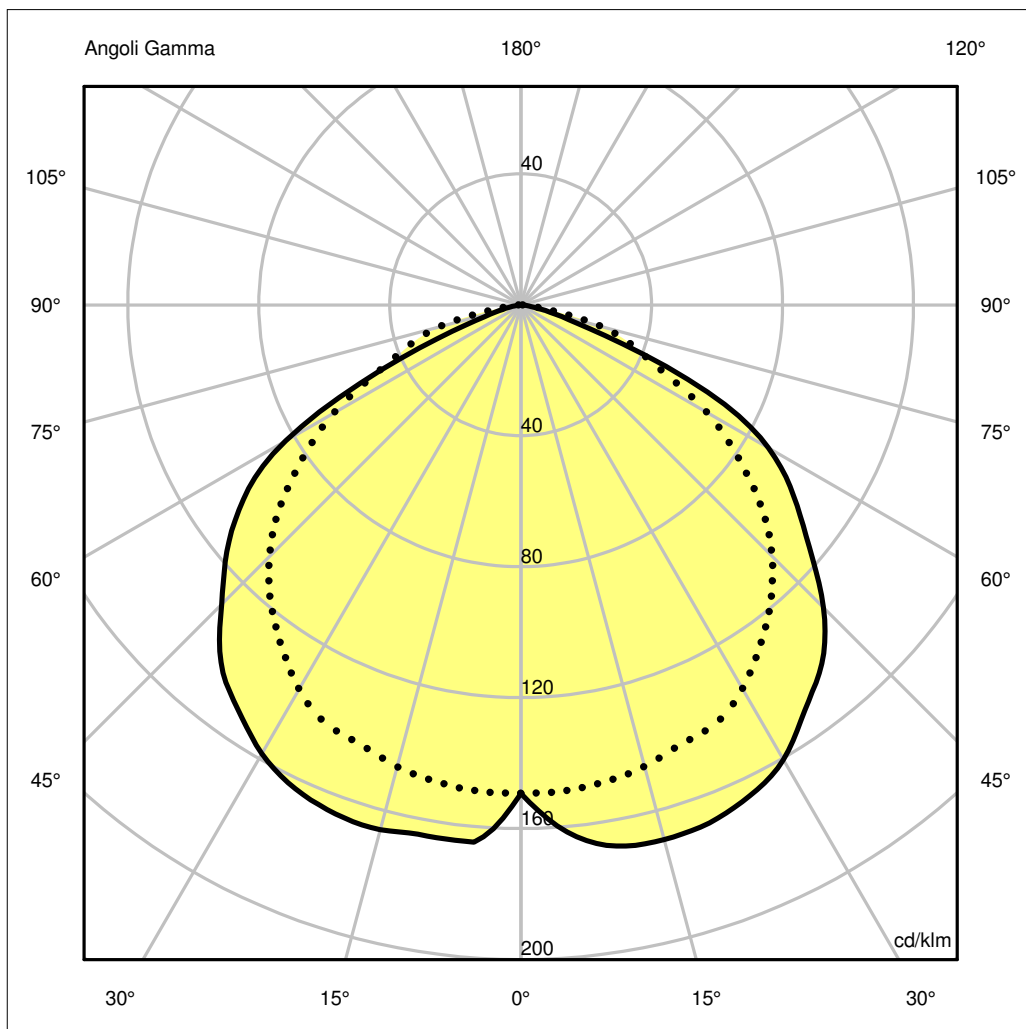

Luminaire

Code A005010
Name TIZIO TAVOLO 35

Measur.


Code FTS0002584
Name TIZIO TAVOLO 35

Luminaire Flux	410.70 lm	Luminaire Power	35.00 W	Efficacy	11.73 lm/W	Efficiency	47.76%
Lamps Flux	860.00 lm	Maximum value	169.07 cd/klm	Position	C=0.00 G=15.00	CG Sym. on planes 0-180	
Rectangular Luminaire		Length	74 mm	Width	100 mm	Height	56 mm
Rectangular Luminous Area		Length	67 mm	Width	65 mm	Height	0 mm
Horizontal Luminous Area		0.004355 m2		Emitting area on Plane 180°		0.000000 m2	
Emitting area on Plane 0°		0.000000 m2		Emitting area on Plane 270°		0.000000 m2	
Emitting area on Plane 90°		0.000000 m2		Glare area at 76°		0.001054 m2	
Coordinate system		CG		Symmetry Type		Sym. on planes 0-180	
Date		01-08-1995		Maximum Gamma Angle		180	
Measurement Distance		0.00		Measurement Flux		860.00 lm	
64432 ECO							
C.I.E.	49 84 98 100 48			D DIN 5040		A30	
F UTE	0.48 E			B NBN		BZ 4	

Width at 50.00 % of Max Intensity

H[m]	1.00	2.00	3.00	4.00	5.00	H[m]	1.00	2.00	3.00	4.00	5.00
OA	1.79	3.57	5.36	7.14	8.93	OC	1.37	2.73	4.10	5.47	6.83
OB	1.71	3.42	5.14	6.85	8.56	OD	1.37	2.73	4.10	5.47	6.83

	Luminous Intensities [cd/klm]									
	0	5	15	25	35	45	55	65	75	85
OA	128.39	138.97	145.40	142.29	130.05	112.42	87.53	54.14	9.54	1.04
OB	128.39	141.67	142.70	140.21	129.64	111.17	88.98	40.65	5.80	0.41
OC	128.39	128.29	125.58	121.30	109.53	93.37	69.62	40.95	21.68	1.98
OD	128.39	128.29	125.58	121.30	109.53	93.37	69.62	40.95	21.68	1.98

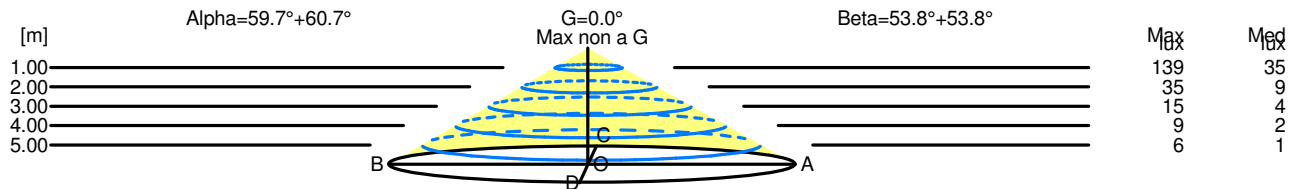

H[m]	D[m]	Max lux	Med lux	Alpha=59.7°+60.7°	G=0.0 Max non a G
1.00	3.50	139	35		
2.00	7.00	35	9		
3.00	10.49	15	4		
4.00	13.99	9	2		
5.00	17.49	6	1		

H[m]	D[m]	Max lux	Med lux	Beta=53.8°+53.8°	G=0.0 Max non a G
1.00	2.73	139	35		
2.00	5.47	35	9		
3.00	8.20	15	4		
4.00	10.93	9	2		
5.00	13.67	6	1		