


## Luminaire

Code 1992030APP  
Name DISCOVERY VERTICAL 70 - APP COMPATIB.NRO

## Measurerm.

Code FTS1901706  
Name DISCOVERY VERTICAL 70 - APP COMPATIB.NRO

|  |                 |                         |               |                             |                 |                         |              |
|--|-----------------|-------------------------|---------------|-----------------------------|-----------------|-------------------------|--------------|
| Luminaire Flux   | 2857.48 lm      | Luminaire Power         | 40.00 W       | Efficacy                    | 71.44 lm/W      | Efficiency              | 100.00%      |
| Lamps Flux   | 2857.48 lm      | Maximum value           | 162.20 cd/klm | Position                    | C=90.00 G=90.00 | CG                      | Asymmetrical |
| Round Luminaire  |                 | Diam.                   | 700 mm        | Height                      | 17 mm           |                         |              |
| Round Luminous Area  |                 | Diam.                   | 635 mm        | Height                      | 0 mm            |                         |              |
| Horizontal Luminous Area   |                 | 0.316692 m <sup>2</sup> |               | Emitting area on Plane 180° |                 | 0.000000 m <sup>2</sup> |              |
| Emitting area on Plane 0°  |                 | 0.000000 m <sup>2</sup> |               | Emitting area on Plane 270° |                 | 0.000000 m <sup>2</sup> |              |
| Emitting area on Plane 90°   |                 | 0.000000 m <sup>2</sup> |               | Glare area at 76°           |                 | 0.076615 m <sup>2</sup> |              |
| Coordinate system  |                 | CG                      |               | Symmetry Type               |                 | Asymmetrical            |              |
| Date   |                 | 03-12-2020              |               | Maximum Gamma Angle         |                 | 180                     |              |
| Measurement Distance   |                 | 0.00                    |               | Measurement Flux            |                 | 2857.48 lm              |              |
| LED Flux=5162,57lm LED Power=35W Eff=55% EfcLed=148lm/W EfcLum=71lm/W CCT=3000K Ra=90 SDCM=3 L70(6K)=50000 h |                 |                         |               |                             |                 |                         |              |
| C.I.E.   | 17 42 70 50 100 |                         |               | D DIN 5040                  |                 | C11                     |              |
| F UTE  | 0.50 J + 0.50 T |                         |               | B NBN                       |                 | BZ 10                   |              |

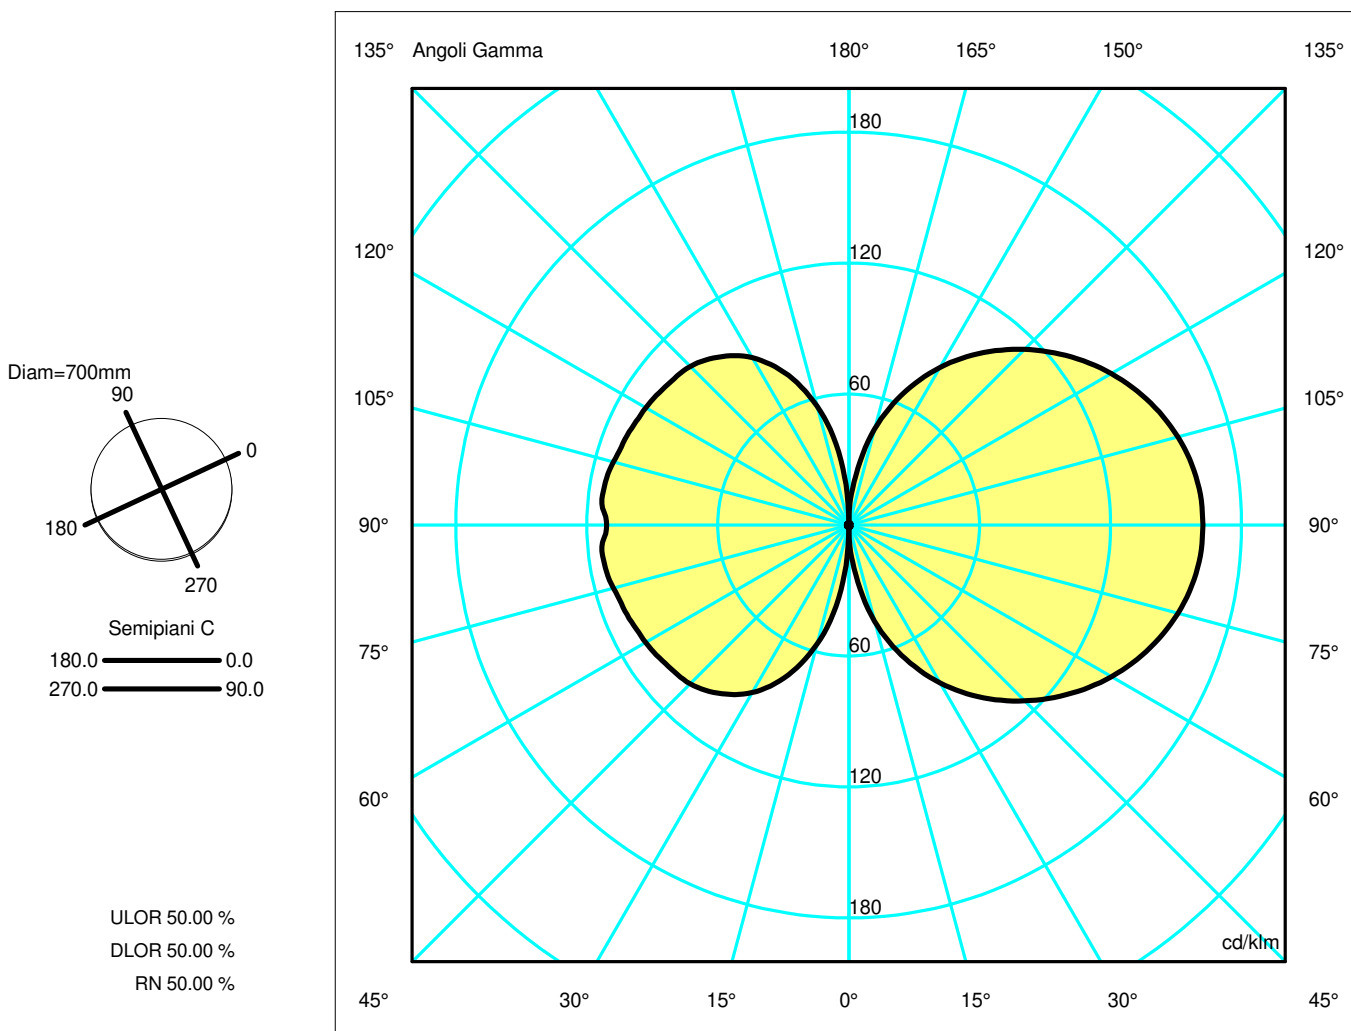

**Luminaire**

Code 1992030APP  
Name DISCOVERY VERTICAL 70 - APP COMPATIB.NRO

**Measur.**

Code FTS1901706  
Name DISCOVERY VERTICAL 70 - APP COMPATIB.NRO

|  |                 |                 |                  |                             |                 |              |              |
|--|-----------------|-----------------|------------------|-----------------------------|-----------------|--------------|--------------|
| Luminaire Flux   | 2857.48 lm      | Luminaire Power | 40.00 W          | Efficacy                    | 71.44 lm/W      | Efficiency   | 100.00%      |
| Lamps Flux   | 2857.48 lm      | Maximum value   | 162.20 cd/klm    | Position                    | C=90.00 G=90.00 | CG           | Asymmetrical |
| Round Luminaire<br>Round Luminous Area   |                 | Diam.<br>Diam.  | 700 mm<br>635 mm | Height<br>Height            | 17 mm<br>0 mm   |              |              |
| Horizontal Luminous Area   |                 | 0.316692 m2     |                  | Emitting area on Plane 180° |                 | 0.000000 m2  |              |
| Emitting area on Plane 0°  |                 | 0.000000 m2     |                  | Emitting area on Plane 270° |                 | 0.000000 m2  |              |
| Emitting area on Plane 90°   |                 | 0.000000 m2     |                  | Glare area at 76°           |                 | 0.076615 m2  |              |
| Coordinate system  |                 | CG              |                  | Symmetry Type               |                 | Asymmetrical |              |
| Date   |                 | 03-12-2020      |                  | Maximum Gamma Angle         |                 | 180          |              |
| Measurement Distance   |                 | 0.00            |                  | Measurement Flux            |                 | 2857.48 lm   |              |
| LED Flux=5162,57lm LED Power=35W Eff=55% EfcLed=148lm/W EfcLum=71lm/W CCT=3000K Ra=90 SDCM=3 L70(6K)=50000 h |                 |                 |                  |                             |                 |              |              |
| C.I.E.   | 17 42 70 50 100 |                 |                  | D DIN 5040                  |                 | C11          |              |
| F UTE  | 0.50 J + 0.50 T |                 |                  | B NBN                       |                 | BZ 10        |              |

Apertura a destra non trovata, gamma =-90

Apertura a destra non trovata, gamma =-90

Apertura a destra non trovata, gamma =-90