


Luminaire

Code 0180020A
Name GOPLE T PLUG

Measurem.

Code FTS2001828
Name GOPLE T PLUG

Luminaire Flux	413.64 lm	Luminaire Power	5.50 W	Efficacy	75.21 lm/W	Efficiency	88.01%
Lamps Flux	470.00 lm	Maximum value	91.03 cd/klm	Position	C=0.00 G=104.00	CG	Rotosymmetrical
Round Luminaire Round Luminous Area		Diam. Diam.	120 mm 120 mm	Height Height	270 mm 270 mm		
Horizontal Luminous Area Emitting area on Plane 0° Emitting area on Plane 90°		0.011310 m2 0.032400 m2 0.032400 m2		Emitting area on Plane 180° Emitting area on Plane 270° Glare area at 76°		0.032400 m2 0.032400 m2 0.034174 m2	
Coordinate system Date Measurement Distance		CG 10-12-2020 0.00		Symmetry Type Maximum Gamma Angle Measurement Flux		Rotosymmetrical 180 470.00 lm	
E14 470lm 5.5W							
C.I.E. F UTE	12 36 66 44 88 --			D DIN 5040 B NBN		C12 BZ 10	

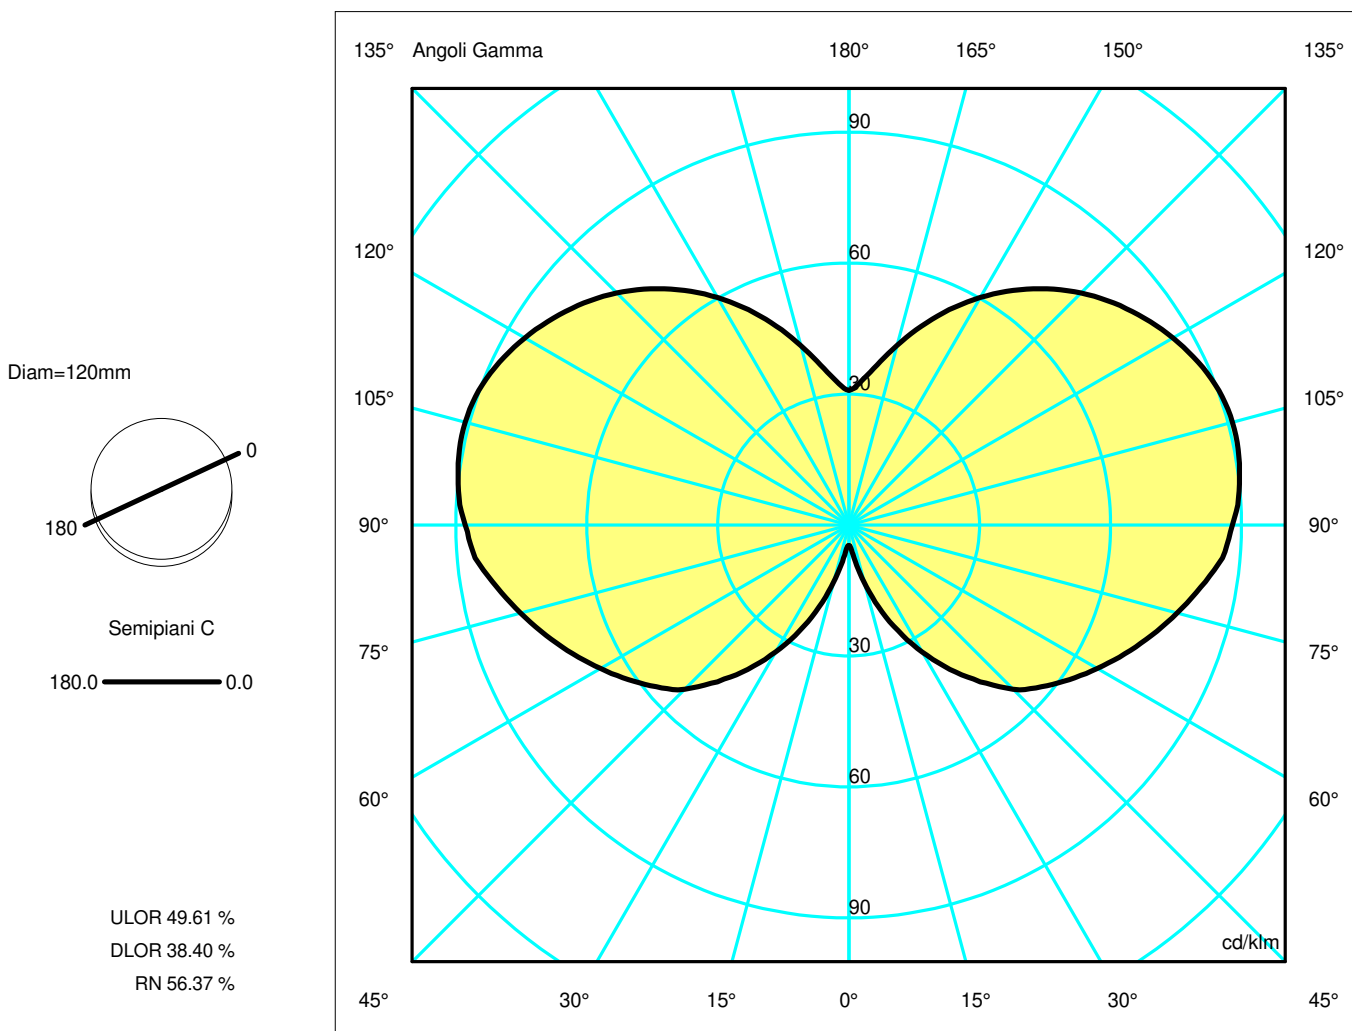

Luminaire

Code 0180020A
Name GOPLE T PLUG

Measurem.

Code FTS2001828
Name GOPLE T PLUG

Luminaire Flux	413.64 lm	Luminaire Power	5.50 W	Efficacy	75.21 lm/W	Efficiency	88.01%
Lamps Flux	470.00 lm	Maximum value	91.03 cd/klm	Position	C=0.00 G=104.00	CG	Rotosymmetrical
Round Luminaire Round Luminous Area		Diam. Diam.	120 mm 120 mm	Height Height	270 mm 270 mm		
Horizontal Luminous Area		0.011310 m2		Emitting area on Plane 180°		0.032400 m2	
Emitting area on Plane 0°		0.032400 m2		Emitting area on Plane 270°		0.032400 m2	
Emitting area on Plane 90°		0.032400 m2		Glare area at 76°		0.034174 m2	
Coordinate system		CG		Symmetry Type		Rotosymmetrical	
Date		10-12-2020		Maximum Gamma Angle		180	
Measurement Distance		0.00		Measurement Flux		470.00 lm	
E14 470lm 5.5W							
C.I.E.	12 36 66 44 88			D DIN 5040	C12		
F UTE	--			B NBN	BZ 10		

Apertura a destra non trovata, gamma =76

Apertura a destra non trovata, gamma =76