

SLC DL04 SQUARE X1 R83 BL TED 930 IP54 36°

14/01/2022

SLC1239



Product description

The DL04 Square X1 is a square, tiltable (25°) recessed luminaire in a contemporary design
Experience pleasant light with low glare and plenty of lumens
Suitable for outdoor use (IP54)
Driver included

The DL04 Square X1 is a square, tiltable (25°) recessed luminaire in a contemporary design
Experience pleasant light with low glare and plenty of lumens
Suitable for outdoor use (IP54)
Driver included
Quick connect with loop-in / loop-out
CRI > 90 ensures vivid colours in any environment
16 mm cable tube



Technical data

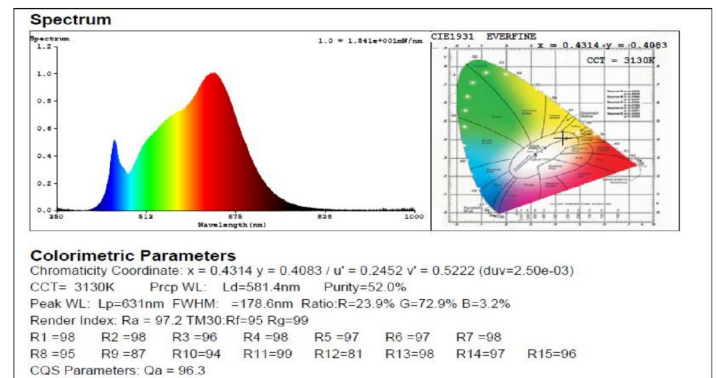
Suitable for built-in mounting	Yes	Suitable for ceiling mounting	Yes
Adjustability	Swivelling	Lamp type	LED not exchangeable
Material housing	Aluminium	Surface protection	Powder coating
Colour housing	Black	Material cover	Plastic, transparent
LED nominal current at constant current	220 - 220 mA	Type of control gear	LED operating device current-controlled
Control gear included	Yes	Dimming phase cut-off	Yes
Reflector	High-gloss	Light distributor	Reflector
Light sharing	Symmetric	Beam angle	Medium beam 21-40°
Light outlet	Direct	Rated life time L90/B10 at 25 °C	100000 h







Degree of protection (IP)	IP54
Rated ambient temperature according to IEC	-20 - 45 °C
Colour of light	White
Colour rendering index CRI	90-100
Lamp efficacy	67,3 lm/W
Height/depth	60 mm
Type of wiring	Suitable for through wiring
Conductor cross section	0,35 mm ²
Connection type	Plug clamp
Colour consistency (McAdam ellipse)	SDCM3
Colour rendering index (CRI/Ra)	90
Tilt-able (°)	25
Cut-out hole (Ø: mm)	83
Dimmable	Yes
Brand	SLC
Produced by	The Light Group


Protection class	I
Max. system power	9,6 W
Colour temperature	3000 - 3000 K
Rated luminous flux according to IEC 62722-	647 lm
Width	96 mm
Length	96 mm
Number of poles	2
Connectable conductor cross section	1,5 - 2,5 mm ²
Luminaire efficacy	67,3 lm/W
Strain relief	Yes
Beam angle (°)	36
Glare (UGR)	UGR<22
Dimming method	Trailing edge
Dimming range	1-100%
GTIN	7070938065573






 **ENERG** 

Scandinavian Lighting Concept
SLC1239


A 

B 

C 

D 

E 

F  

G 

9
kWh/1000h

 2019/2015

