



**ALGAE M PD**

**696-001020323550v1**


ALGAE SUSPENSION made of aluminium, white, similar to RAL 9016, beam 38°, light output direct, max. 700mA, cable white, soft-touch, adapter/ceiling base white, pendant length 1500mm, IP20

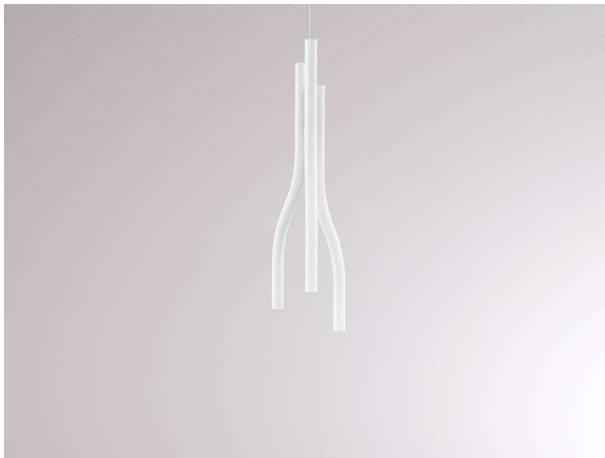

**DRAWING**

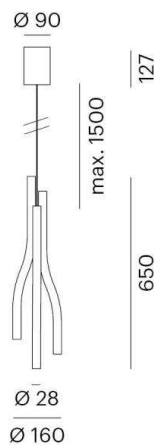

**LIGHT DISTRIBUTION CURVE**

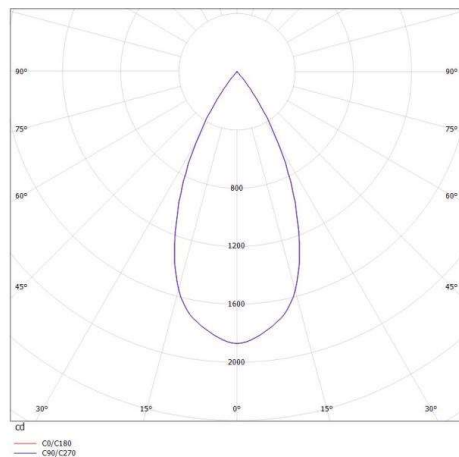

**TECHNICAL DETAILS**

|                            |   |
|----------------------------|---|
| System perform. [W]        | 14  |
| Bulb type                  | LED   |
| Luminous flux [lm]         | 1220  |
| Current sec. [mA]          | 700   |
| Colour temp. [K]           | 2700K   |
| CRI                        | >90   |
| Optics                     | vacuum deposited synthetic reflector<br>Rainer Mutsch |
| Designer                   | direct  |
| Light output               | 38°   |
| Beam angle [°]             | 220-240V 50/60Hz                                      |
| Voltage [V]                | aluminium   |
| Material                   |   |
|                            | 140   |
| Length [mm]                | 650   |
| Height [mm]                | 1500  |
| Pendant length [mm]        | 160   |
| Diameter [mm]              | IP20  |
| IP protection class        | protection cl. I                                      |
| Voltage class              | 0,66  |
| Net weight [kg]            |   |
|                            | white   |
| Color lamp                 | 9016  |
| RAL                        | white   |
| Color adapter/ceiling base | white, soft-touch                                     |
| Electric wire              | 9010506238495   |
| EAN-Number                 | 50 000 L80 B10  |
| Lifetime [h]               | 50  |
| No. of luminaires B16A     |   |

The values are rated values. Power and luminous flux are initially subject to a tolerance of +/- 10%. Colour temperature tolerance: +/- 150 K. The values apply to an ambient temperature of 25°C unless otherwise specified.