


TNL 25.1040.02/DALI

Trentino II Ceiling (1xLED 112W 840/4000K 9060lm)

— C0/C180 cd / 1000 lm - - - C90/C270

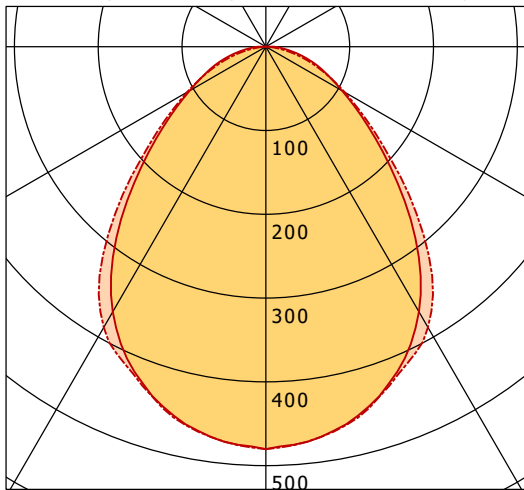

	C0	C90	C180	C270
0°	480	480	480	480
15°	450	452	450	452
30°	365	387	365	387
45°	216	235	216	235
60°	105	109	105	109
75°	47	39	47	39
90°	10	1	10	1
cd / 1000 lm				

Offset [m] Cone width [m] Illuminance [lx]

Offset [m]	C0-C180 Plane	C90-C270 Plane	Illuminance [lx]
3.0	5.53 5.90		483.5
6.0	11.07 11.80		120.9
9.0	16.60 17.70	53.7	
12.0	22.14 23.61		30.2
15.0	27.67 29.51		19.3

η	LED
Efficiency	81 lm/W
Direct/Indirect	↓ 100% / ↑ 0%
System Power	112 W
UGR	X=4H, Y=8H
Reflection factors	70/50/20
UGR C0/C180	24.7
UGR C90/C270	24.1
CIE Flux Codes	59 85 97 100 100
Ra/CRI	>80