

## Luminaire


Code 0697020A  
Name LOGICO MINI SOSPENSIONE 3 IN LINEA

## Measurement

Code FTS0002508  
Name LOGICO MINI SOSPENSIONE 3 IN LINEA

Luminaire Flux	3250.41 lm	Luminaire Power	70.00 W	Efficacy	46.43 lm/W	Efficiency	91.82%
Lamps Flux	3540.00 lm	Maximum value	136.82 cd/klm	Position	C=75.00 G=30.00	CG	Asymmetrical
Rectangular Luminaire		Length	280 mm	Width	660 mm	Height	230 mm
Rectangular Luminous Area		Length	280 mm	Width	660 mm	Height	230 mm
Horizontal Luminous Area		0.184800 m <sup>2</sup>		Emitting area on Plane 180°		0.064400 m <sup>2</sup>	
Emitting area on Plane 0°		0.064400 m <sup>2</sup>		Emitting area on Plane 270°		0.151800 m <sup>2</sup>	
Emitting area on Plane 90°		0.151800 m <sup>2</sup>		Glare area at 76°		0.107194 m <sup>2</sup>	
Coordinate system		CG		Symmetry Type		Asymmetrical	
Date		02-09-2002		Maximum Gamma Angle		180	
Measurement Distance		0.00		Measurement Flux		3540.00 lm	
70W HSGST E27							
C.I.E.	31 54 77 58 92			D DIN 5040	C21		
F UTE	0.54 H + 0.38 T			B NBN	BZ 7		


280mm x 660mm



Semipiani C

180.0 ——— 0.0  
270.0 - - - - - 90.0

ULOR 38.21 %  
DLOR 53.61 %  
RN 41.62 %

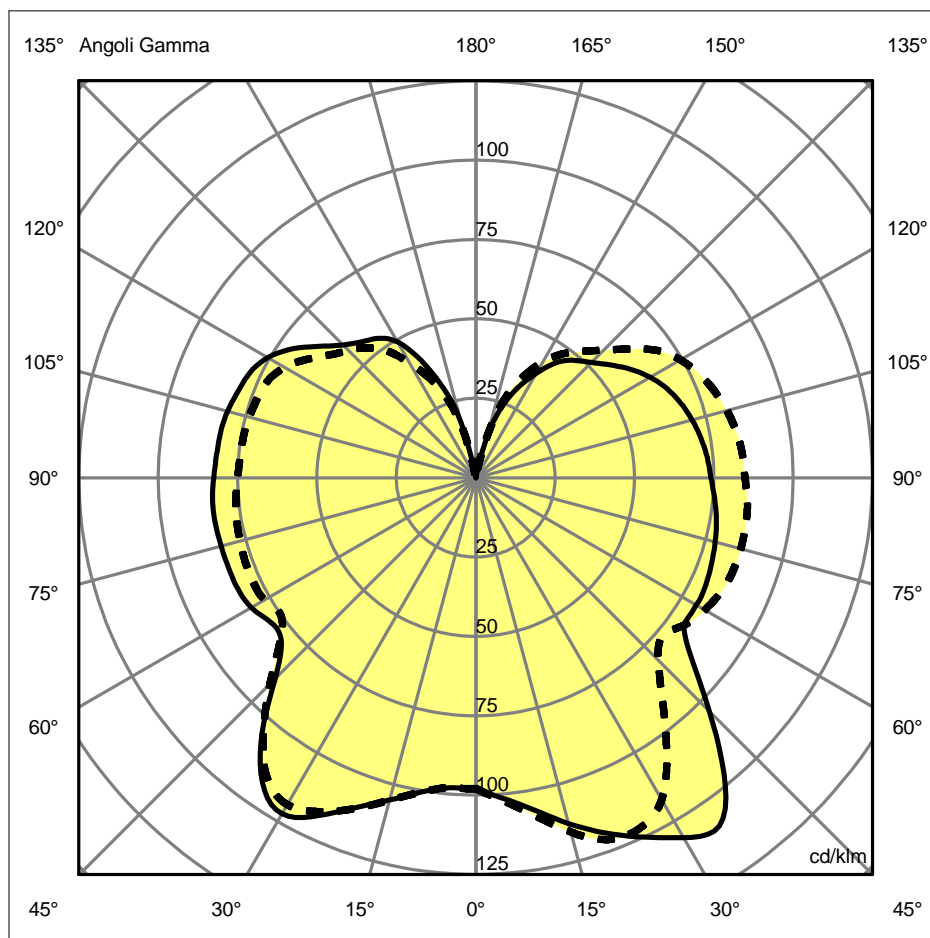

**Luminaire**

Code 0697020A  
Name LOGICO MINI SOSPENSIONE 3 IN LINEA

**Measur.**

Code FTS0002508  
Name LOGICO MINI SOSPENSIONE 3 IN LINEA

Luminaire Flux	3250.41 lm	Luminaire Power	70.00 W	Efficacy	46.43 lm/W	Efficiency	91.82%
Lamps Flux	3540.00 lm	Maximum value	136.82 cd/klm	Position	C=75.00 G=30.00	CG	Asymmetrical
Rectangular Luminaire		Length	280 mm	Width	660 mm	Height	230 mm
Rectangular Luminous Area		Length	280 mm	Width	660 mm	Height	230 mm
Horizontal Luminous Area		0.184800 m2		Emitting area on Plane 180°		0.064400 m2	
Emitting area on Plane 0°		0.064400 m2		Emitting area on Plane 270°		0.151800 m2	
Emitting area on Plane 90°		0.151800 m2		Glare area at 76°		0.107194 m2	
Coordinate system		CG		Symmetry Type		Asymmetrical	
Date		02-09-2002		Maximum Gamma Angle		180	
Measurement Distance		0.00		Measurement Flux		3540.00 lm	
70W HSGST E27							
C.I.E.	31 54 77 58 92			D DIN 5040	C21		
F UTE	0.54 H + 0.38 T			B NBN	BZ 7		

Apertura a destra non trovata, gamma =34

Apertura a destra non trovata, gamma =34

Apertura a destra non trovata, gamma =34

**Luminaire**

Code 0697020A  
Name LOGICO MINI SOSPENSIONE 3 IN LINEA

**Measurement**

Code FTS0002508  
Name LOGICO MINI SOSPENSIONE 3 IN LINEA

Luminaire Flux	3250.41 lm	Luminaire Power	70.00 W	Efficacy	46.43 lm/W	Efficiency	91.82%
Lamps Flux	3540.00 lm	Maximum value	136.82 cd/klm	Position	C=75.00 G=30.00	CG	Asymmetrical

**UGR**  
S = 0.250

Reflectancies										
Ceiling/Cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
WorkingPlane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
RoomDimensions	ViewedCrosswise					ViewedEndwise				
x=2H y=2H	10.7	11.7	11.5	12.5	12.7	9.8	10.8	10.6	11.6	12.7
x=2H y=3H	13.7	14.6	14.5	15.5	15.2	12.4	13.3	13.2	14.2	15.2
x=2H y=4H	15.3	16.2	16.2	17.0	16.6	13.8	14.6	14.6	15.5	16.6
x=2H y=6H	17.0	17.8	17.9	18.7	18.0	15.2	16.0	16.0	16.9	18.0
x=2H y=8H	17.9	18.6	18.7	19.5	18.6	15.9	16.6	16.7	17.5	18.6
x=2H y=12H	18.8	19.5	19.6	20.4	19.3	16.6	17.3	17.4	18.2	19.3
x=4H y=2H	11.4	12.2	12.2	13.1	13.5	10.7	11.5	11.5	12.4	13.5
x=4H y=3H	14.5	15.2	15.4	16.1	16.2	13.4	14.2	14.3	15.1	16.2
x=4H y=4H	16.2	16.9	17.1	17.8	17.7	14.9	15.6	15.8	16.5	17.7
x=4H y=6H	18.1	18.6	19.0	19.6	19.2	16.5	17.1	17.4	18.0	19.2
x=4H y=8H	19.0	19.6	19.9	20.5	19.9	17.3	17.8	18.2	18.7	19.9
x=4H y=12H	20.0	20.5	20.9	21.5	20.7	18.0	18.6	19.0	19.5	20.7
x=8H y=4H	16.6	17.2	17.6	18.1	18.2	15.5	16.1	16.4	17.0	18.2
x=8H y=6H	18.6	19.1	19.6	20.1	19.9	17.3	17.7	18.2	18.7	19.9
x=8H y=8H	19.7	20.2	20.7	21.1	20.8	18.2	18.6	19.2	19.6	20.8
x=8H y=12H	20.9	21.3	21.9	22.2	21.7	19.1	19.5	20.1	20.5	21.7
x=12H y=4H	16.7	17.2	17.7	18.2	18.3	15.6	16.1	16.6	17.1	18.3
x=12H y=6H	18.8	19.2	19.8	20.2	20.1	17.5	17.9	18.4	18.9	20.1
x=12H y=8H	19.9	20.3	20.9	21.3	21.1	18.5	18.9	19.5	19.8	21.1