

Luminaire


Code 2002030APP_W
Name DISCOVERY SPACE 75x150 S TW APP COMP NRO - WARM

Measurem.

Code FTS2000482
Name DISCOVERY SPACE 75x150 S TW APP COMP NRO - WARM

| | | | | | | | |
|--|-----------------|-----------------|---------------|-----------------------------|-----------------|--------------|--------------|
| Luminaire Flux | 3554.84 lm | Luminaire Power | 62.00 W | Efficacy | 57.34 lm/W | Efficiency | 100.00% |
| Sources Flux | 3554.84 lm | Maximum value | 155.87 cd/klm | Position | C=90.00 G=90.00 | CG | Asymmetrical |
| Rectangular Luminaire | | Length | 17 mm | Width | 770 mm | Height | 1540 mm |
| Rectangular Luminous Area | | Length | 1 mm | Width | 670 mm | Height | 1399 mm |
| Horizontal Luminous Area | | 0.000670 m2 | | Emitting area on Plane 180° | | 0.001400 m2 | |
| Emitting area on Plane 0° | | 0.001400 m2 | | Emitting area on Plane 270° | | 0.938000 m2 | |
| Emitting area on Plane 90° | | 0.938000 m2 | | Glare area at 76° | | 0.001521 m2 | |
| Coordinate system | | CG | | Symmetry Type | | Asymmetrical | |
| Date | | 11-11-2020 | | Maximum Gamma Angle | | 180 | |
| Measurement Distance | | 0.00 | | Measurement Flux | | 3554.84 lm | |
| LED Flux=6240,28lm LED Power=51W Eff=57% EfcLed=122lm/W EfcLum=57lm/W CCT=2700 Ra=80 L70(6K)=60000 h | | | | | | | |
| C.I.E. | 20 45 72 50 100 | | | D DIN 5040 | | C11 | |
| F UTE | 0.50 J + 0.50 T | | | B NBN | | BZ 9 | |

17mm x 770mm




Sempiani C

180.0 — 0.0
270.0 — 90.0

ULOR 49.98 %

DLOR 50.02 %

RN 49.98 %

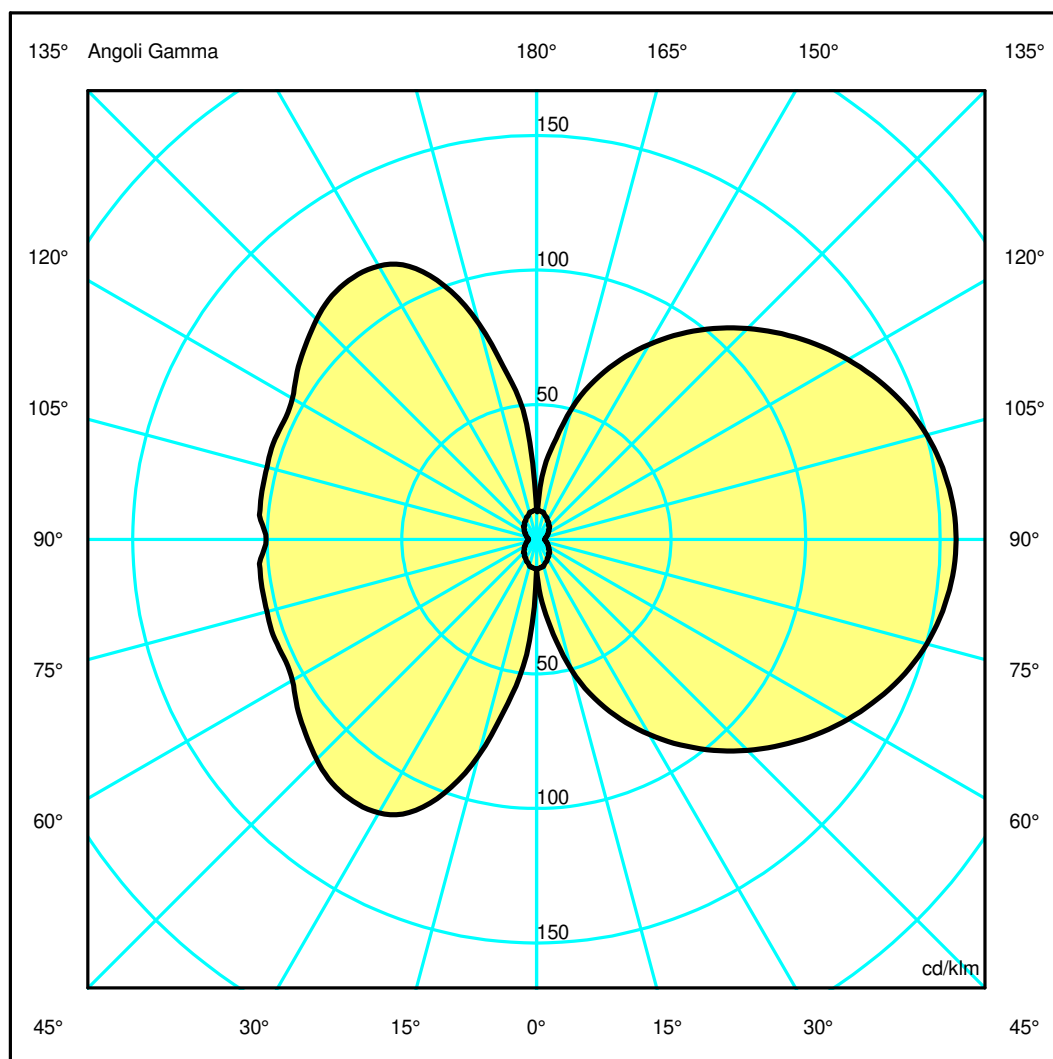

Luminaire

Code 2002030APP_W
 Name DISCOVERY SPACE 75x150 S TW APP COMP NRO - WARM

Measurem.

Code FTS2000482
 Name DISCOVERY SPACE 75x150 S TW APP COMP NRO - WARM

| | | | | | | | |
|--|-----------------|-----------------|---------------|-----------------------------|-----------------|--------------|--------------|
| Luminaire Flux | 3554.84 lm | Luminaire Power | 62.00 W | Efficacy | 57.34 lm/W | Efficiency | 100.00% |
| Sources Flux | 3554.84 lm | Maximum value | 155.87 cd/klm | Position | C=90.00 G=90.00 | CG | Asymmetrical |
| Rectangular Luminaire | | Length | 17 mm | Width | 770 mm | Height | 1540 mm |
| Rectangular Luminous Area | | Length | 1 mm | Width | 670 mm | Height | 1399 mm |
| Horizontal Luminous Area | | 0.000670 m2 | | Emitting area on Plane 180° | | 0.001400 m2 | |
| Emitting area on Plane 0° | | 0.001400 m2 | | Emitting area on Plane 270° | | 0.938000 m2 | |
| Emitting area on Plane 90° | | 0.938000 m2 | | Glare area at 76° | | 0.001521 m2 | |
| Coordinate system | | CG | | Symmetry Type | | Asymmetrical | |
| Date | | 11-11-2020 | | Maximum Gamma Angle | | 180 | |
| Measurement Distance | | 0.00 | | Measurement Flux | | 3554.84 lm | |
| LED Flux=6240,28lm LED Power=51W Eff=57% EfcLed=122lm/W EfcLum=57lm/W CCT=2700 Ra=80 L70(6K)=60000 h | | | | | | | |
| C.I.E. | 20 45 72 50 100 | | | D DIN 5040 | C11 | | |
| F UTE | 0.50 J + 0.50 T | | | B NBN | BZ 9 | | |

Could not find 90270 right beam angle•gamma0180=0

Could not find 90270 right beam angle•gamma0180=0

Could not find 90270 right beam angle•gamma0180=0