

Luminaire

Code 2002010APP_W
Name DISCOVERY SPACE 75x150 S TW APP COMP - WARM

Measurem.

Code FTS2000480
Name DISCOVERY SPACE 75x150 S TW APP COMP - WARM

Luminaire Flux	3554.84 lm	Luminaire Power	62.00 W	Efficacy	57.34 lm/W	Efficiency	100.00%
Sources Flux	3554.84 lm	Maximum value	155.87 cd/klm	Position	C=90.00 G=90.00	CG	Asymmetrical
Rectangular Luminaire		Length	17 mm	Width	770 mm	Height	1540 mm
Rectangular Luminous Area		Length	1 mm	Width	670 mm	Height	1399 mm
Horizontal Luminous Area		0.000670 m2		Emitting area on Plane 180°		0.001400 m2	
Emitting area on Plane 0°		0.001400 m2		Emitting area on Plane 270°		0.938000 m2	
Emitting area on Plane 90°		0.938000 m2		Glare area at 76°		0.001521 m2	
Coordinate system		CG		Symmetry Type		Asymmetrical	
Date		11-11-2020		Maximum Gamma Angle		180	
Measurement Distance		0.00		Measurement Flux		3554.84 lm	


LED Flux=6240,28lm LED Power=51W Eff=57% EfcLed=122lm/W EfcLum=57lm/W CCT=2700 Ra=80 L70(6K)=60000 h

C.I.E. 20 45 72 50 100
F UTE 0.50 J + 0.50 T

D DIN 5040
B NBN

C11
BZ 9

17mm x 770mm




Semipiani C

180.0 — 0.0
270.0 — 90.0

ULOR 49.98 %

DLOR 50.02 %

RN 49.98 %

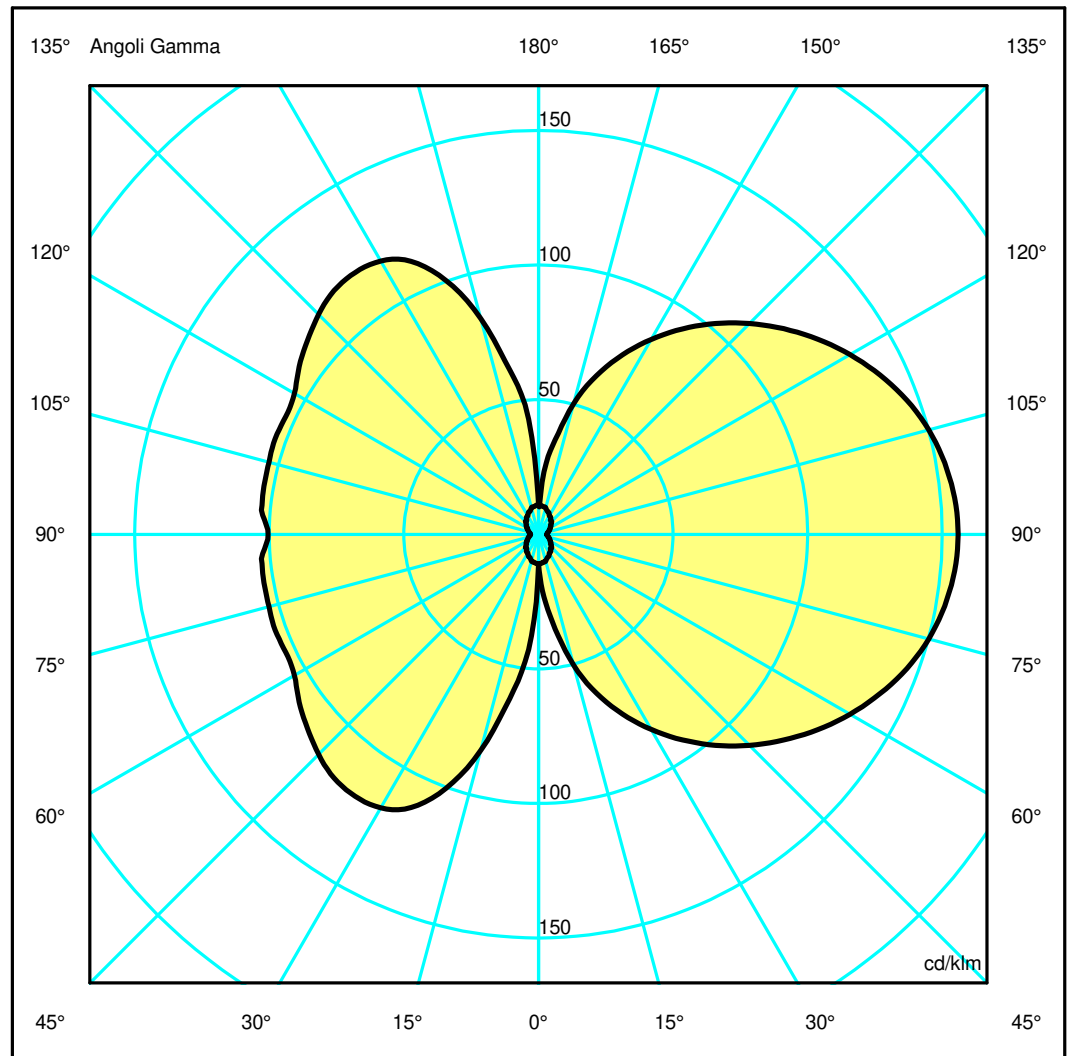

Luminaire

Code 2002010APP_W
 Name DISCOVERY SPACE 75x150 S TW APP COMP - WARM

Measur.

Code FTS2000480
 Name DISCOVERY SPACE 75x150 S TW APP COMP - WARM

Luminaire Flux	3554.84 lm	Luminaire Power	62.00 W	Efficacy	57.34 lm/W	Efficiency	100.00%
Sources Flux	3554.84 lm	Maximum value	155.87 cd/klm	Position	C=90.00 G=90.00	CG	Asymmetrical
Rectangular Luminaire		Length	17 mm	Width	770 mm	Height	1540 mm
Rectangular Luminous Area		Length	1 mm	Width	670 mm	Height	1399 mm
Horizontal Luminous Area		0.000670 m2		Emitting area on Plane 180°		0.001400 m2	
Emitting area on Plane 0°		0.001400 m2		Emitting area on Plane 270°		0.938000 m2	
Emitting area on Plane 90°		0.938000 m2		Glare area at 76°		0.001521 m2	
Coordinate system		CG		Symmetry Type		Asymmetrical	
Date		11-11-2020		Maximum Gamma Angle		180	
Measurement Distance		0.00		Measurement Flux		3554.84 lm	
LED Flux=6240,28lm LED Power=51W Eff=57% EfcLed=122lm/W EfcLum=57lm/W CCT=2700 Ra=80 L70(6K)=60000 h							
C.I.E.	20 45 72 50 100			D DIN 5040	C11		
F UTE	0.50 J + 0.50 T			B NBN	BZ 9		

Could not find 90270 right beam angle•gamma0180=0

Could not find 90270 right beam angle•gamma0180=0

Could not find 90270 right beam angle•gamma0180=0