


## Luminaire

Code T081120  
Name CICLOPE terra 90 monolaterale 6W 3000K grigio antracite

## Measurerm.

Code FTS1603466  
Name CICLOPE terra 90 monolaterale 6W 3000K grigio antracite

|  |   |   |   |               |                  |            |                      |
|--|---|---|---|---------------|------------------|------------|----------------------|
| Luminaire Flux   | 382.72 lm                                 | Luminaire Power   | 6.50 W                                    | Efficacy      | 58.88 lm/W       | Efficiency | 100.00%              |
| Lamps Flux   | 382.72 lm                                 | Maximum value   | 504.75 cd/klm                             | Position      | C=180.00 G=61.00 | CG         | Sym. on planes 0-180 |
| Rectangular Luminaire<br>Round Luminous Area   | Length<br>Diam.                           | 165 mm<br>100 mm  | Width<br>Height                           | 50 mm<br>0 mm | Height           | 265 mm     |                      |
| Horizontal Luminous Area<br>Emitting area on Plane 0°<br>Emitting area on Plane 90°                        | 0.007854 m2<br>0.000000 m2<br>0.000000 m2 | Emitting area on Plane 180°<br>Emitting area on Plane 270°<br>Glare area at 76° | 0.000000 m2<br>0.000000 m2<br>0.001900 m2 |               |                  |            |                      |
| Coordinate system  | CG  | Symmetry Type   | Sym. on planes 0-180                      |               |                  |            |                      |
| Date   | 14-06-2017                                | Maximum Gamma Angle   | 180                                       |               |                  |            |                      |
| Measurement Distance   | 0.00                                      | Measurement Flux  | 382.72 lm                                 |               |                  |            |                      |
| LED Flux=595,3lm LED Power=5W Eff=64% EfcLed=119lm/W EfcLum=59lm/W CCT=3000K Ra=90 SDCM=2 L90(20K)=118000h |   |   |   |               |                  |            |                      |
| C.I.E.   | 25 53 79 82 100                           | D DIN 5040  | B11                                       |               |                  |            |                      |
| F UTE  | 0.82 J + 0.18 T                           | B NBN   | BZ 8 / 2 / BZ 7                           |               |                  |            |                      |

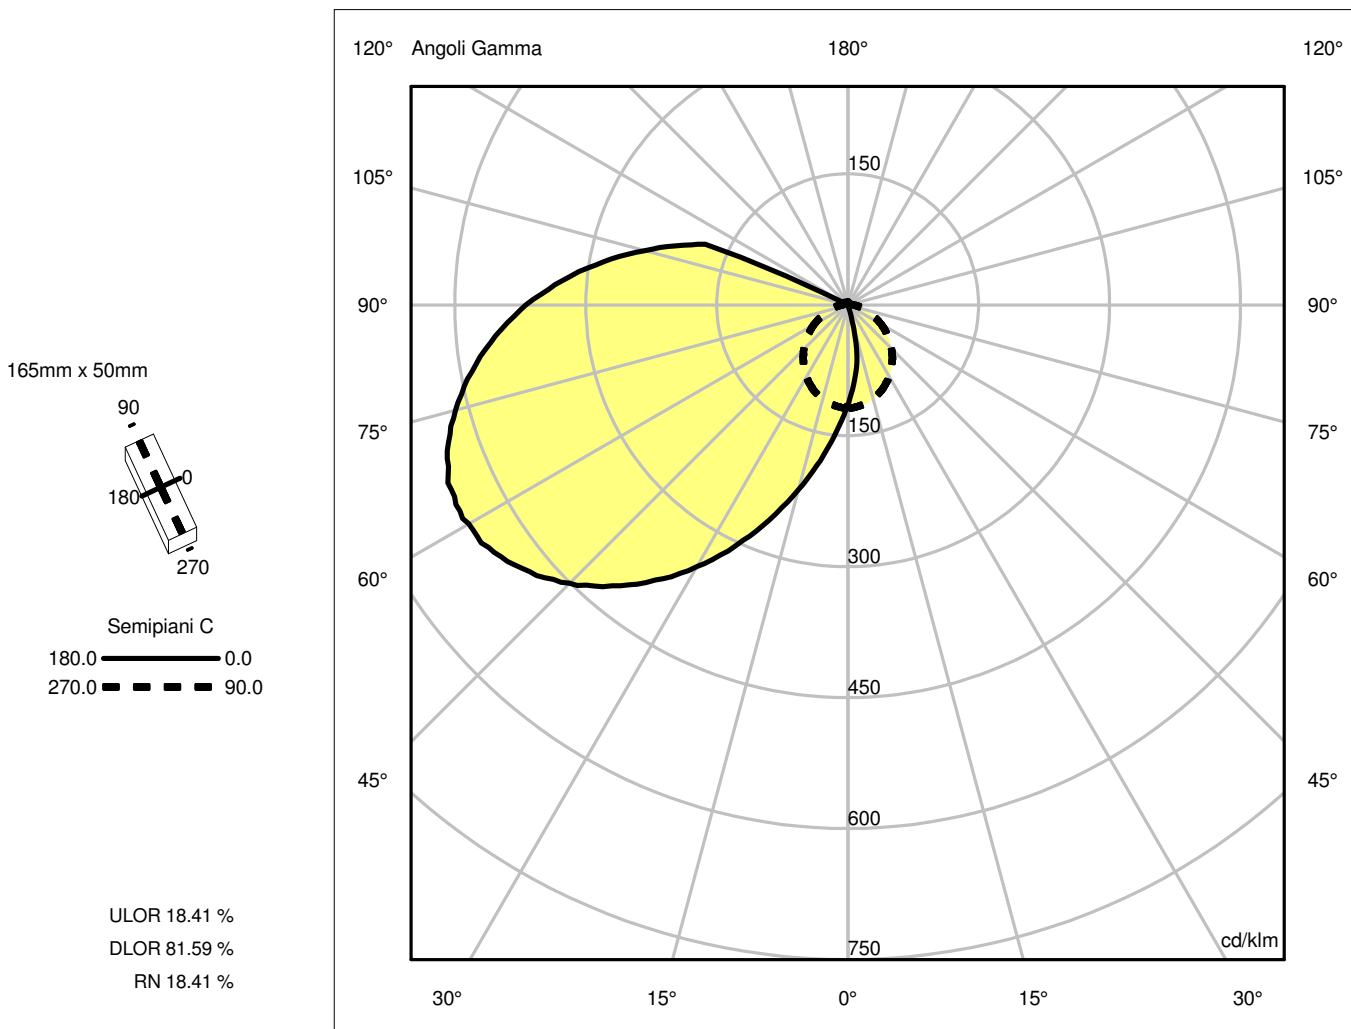

**Luminaire**

Code T081120  
Name CICLOPE terra 90 monolaterale 6W 3000K grigio antracite

**Measur.**

Code FTS1603466  
Name CICLOPE terra 90 monolaterale 6W 3000K grigio antracite

|  |                 |                 |                  |                             |                  |                      |                      |
|--|-----------------|-----------------|------------------|-----------------------------|------------------|----------------------|----------------------|
| Luminaire Flux   | 382.72 lm       | Luminaire Power | 6.50 W           | Efficacy                    | 58.88 lm/W       | Efficiency           | 100.00%              |
| Lamps Flux   | 382.72 lm       | Maximum value   | 504.75 cd/klm    | Position                    | C=180.00 G=61.00 | CG                   | Sym. on planes 0-180 |
| Rectangular Luminaire<br>Round Luminous Area   |                 | Length<br>Diam. | 165 mm<br>100 mm | Width<br>Height             | 50 mm<br>0 mm    | Height               | 265 mm               |
| Horizontal Luminous Area   |                 | 0.007854 m2     |                  | Emitting area on Plane 180° |                  | 0.000000 m2          |                      |
| Emitting area on Plane 0°  |                 | 0.000000 m2     |                  | Emitting area on Plane 270° |                  | 0.000000 m2          |                      |
| Emitting area on Plane 90°   |                 | 0.000000 m2     |                  | Glare area at 76°           |                  | 0.001900 m2          |                      |
| Coordinate system  |                 | CG              |                  | Symmetry Type               |                  | Sym. on planes 0-180 |                      |
| Date   |                 | 14-06-2017      |                  | Maximum Gamma Angle         |                  | 180                  |                      |
| Measurement Distance   |                 | 0.00            |                  | Measurement Flux            |                  | 382.72 lm            |                      |
| LED Flux=595,3lm LED Power=5W Eff=64% EfcLed=119lm/W EfcLum=59lm/W CCT=3000K Ra=90 SDCM=2 L90(20K)=118000h |                 |                 |                  |                             |                  |                      |                      |
| C.I.E.   | 25 53 79 82 100 |                 |                  | D DIN 5040                  | B11              |                      |                      |
| F UTE  | 0.82 J + 0.18 T |                 |                  | B NBN                       | BZ 8 / 2 / BZ 7  |                      |                      |

Apertura a sinistra non trovata, gamma =-61

Apertura a sinistra non trovata, gamma =-61

Apertura a sinistra non trovata, gamma =-61