


## Luminaire

Code 1998060A  
Name DISCOVERY LED C/W bzo

## Measurem.

Code FTS2000097  
Name DISCOVERY LED C/W bzo

|  |   |   |               |              |                 |   |              |
|--|---|---|---------------|--------------|-----------------|---|--------------|
| Luminaire Flux   | 2857.48 lm                                | Luminaire Power   | 40.00 W       | Efficacy     | 71.44 lm/W      | Efficiency                                | 100.00%      |
| Lamps Flux   | 2857.48 lm                                | Maximum value   | 162.20 cd/klm | Position     | C=90.00 G=90.00 | CG  | Asymmetrical |
| Round Luminaire<br>Round Luminous Area   | Diam. 700 mm<br>Diam. 635 mm              | Height  | 17 mm         | Height       | 0 mm            |   |              |
| Horizontal Luminous Area<br>Emitting area on Plane 0°<br>Emitting area on Plane 90°                          | 0.316692 m2<br>0.000000 m2<br>0.000000 m2 | Emitting area on Plane 180°<br>Emitting area on Plane 270°<br>Glare area at 76° |               |              |                 | 0.000000 m2<br>0.000000 m2<br>0.076615 m2 |              |
| Coordinate system<br>Date<br>Measurement Distance  | CG<br>03-12-2020<br>0.00                  | Symmetry Type<br>Maximum Gamma Angle<br>Measurement Flux                        |               |              |                 | Asymmetrical<br>180<br>2857.48 lm         |              |
| LED Flux=5162,57lm LED Power=35W Eff=55% EfcLed=148lm/W EfcLum=71lm/W CCT=3000K Ra=90 SDCM=3 L70(6K)=50000 h |   |   |               |              |                 |   |              |
| C.I.E.<br>F UTE  | 17 42 70 50 100<br>0.50 J + 0.50 T        | D DIN 5040<br>B NBN   |               | C11<br>BZ 10 |                 |   |              |

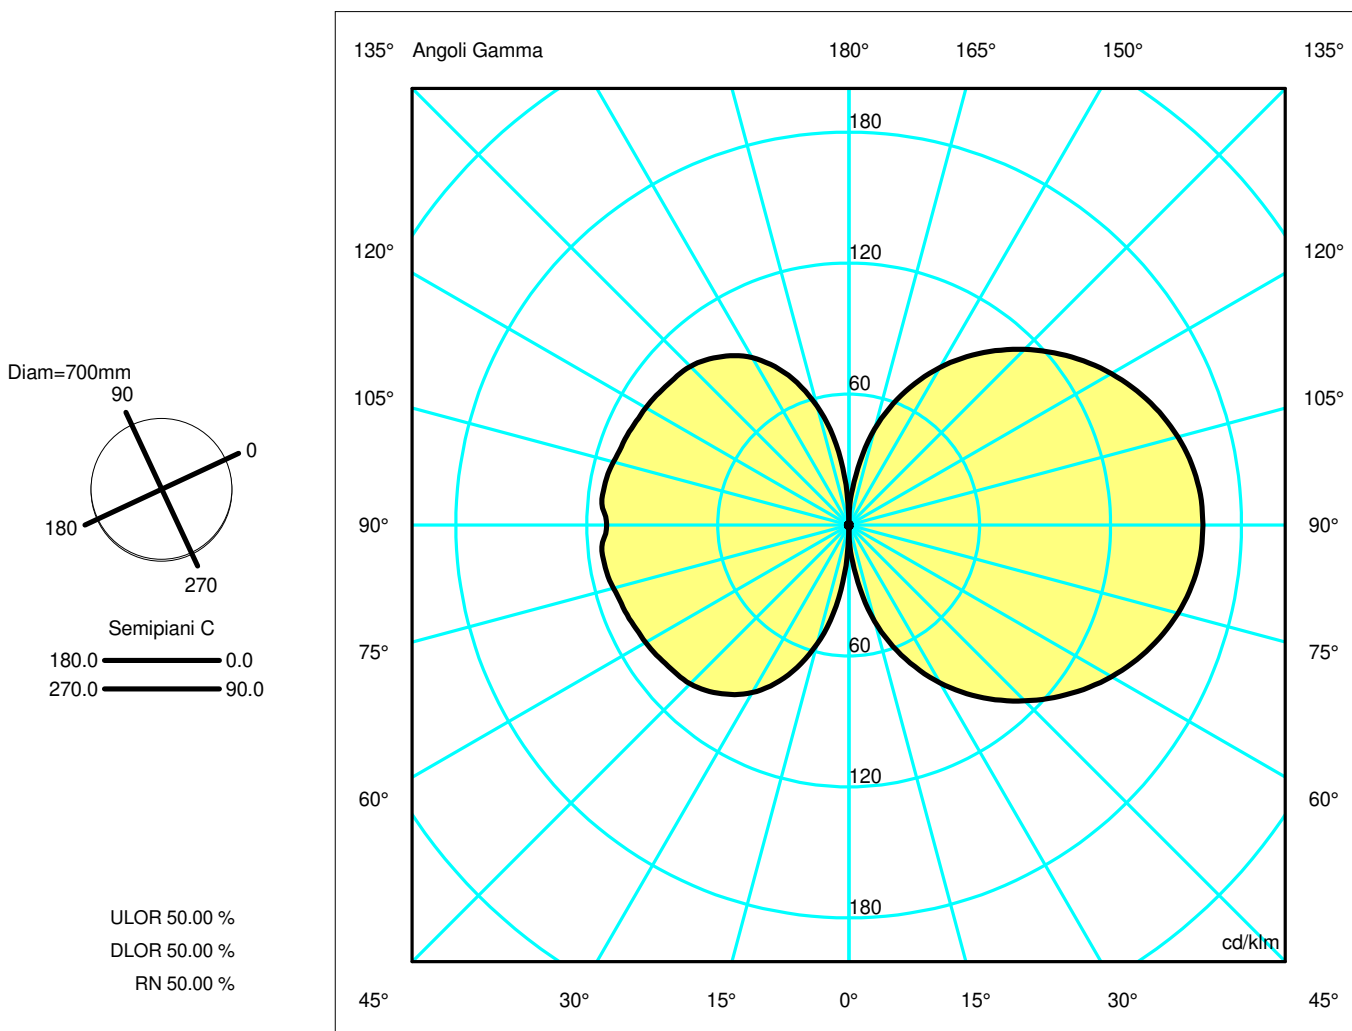

**Luminaire**

Code 1998060A  
Name DISCOVERY LED C/W bzo

**Measur.**

Code FTS2000097  
Name DISCOVERY LED C/W bzo

|  |                 |                 |               |                             |                 |              |              |
|--|-----------------|-----------------|---------------|-----------------------------|-----------------|--------------|--------------|
| Luminaire Flux   | 2857.48 lm      | Luminaire Power | 40.00 W       | Efficacy                    | 71.44 lm/W      | Efficiency   | 100.00%      |
| Lamps Flux   | 2857.48 lm      | Maximum value   | 162.20 cd/klm | Position                    | C=90.00 G=90.00 | CG           | Asymmetrical |
| Round Luminaire  |                 | Diam.           | 700 mm        | Height                      | 17 mm           |              |              |
| Round Luminous Area  |                 | Diam.           | 635 mm        | Height                      | 0 mm            |              |              |
| Horizontal Luminous Area   |                 | 0.316692 m2     |               | Emitting area on Plane 180° |                 | 0.000000 m2  |              |
| Emitting area on Plane 0°  |                 | 0.000000 m2     |               | Emitting area on Plane 270° |                 | 0.000000 m2  |              |
| Emitting area on Plane 90°   |                 | 0.000000 m2     |               | Glare area at 76°           |                 | 0.076615 m2  |              |
| Coordinate system  |                 | CG              |               | Symmetry Type               |                 | Asymmetrical |              |
| Date   |                 | 03-12-2020      |               | Maximum Gamma Angle         |                 | 180          |              |
| Measurement Distance   |                 | 0.00            |               | Measurement Flux            |                 | 2857.48 lm   |              |
| LED Flux=5162,57lm LED Power=35W Eff=55% EfcLed=148lm/W EfcLum=71lm/W CCT=3000K Ra=90 SDCM=3 L70(6K)=50000 h |                 |                 |               |                             |                 |              |              |
| C.I.E.   | 17 42 70 50 100 |                 |               | D DIN 5040                  | C11             |              |              |
| F UTE  | 0.50 J + 0.50 T |                 |               | B NBN                       | BZ 10           |              |              |

Apertura a destra non trovata, gamma =-90

Apertura a destra non trovata, gamma =-90

Apertura a destra non trovata, gamma =-90