


# GEJST


## OPA

By Rune Krøjgaard

Instruction

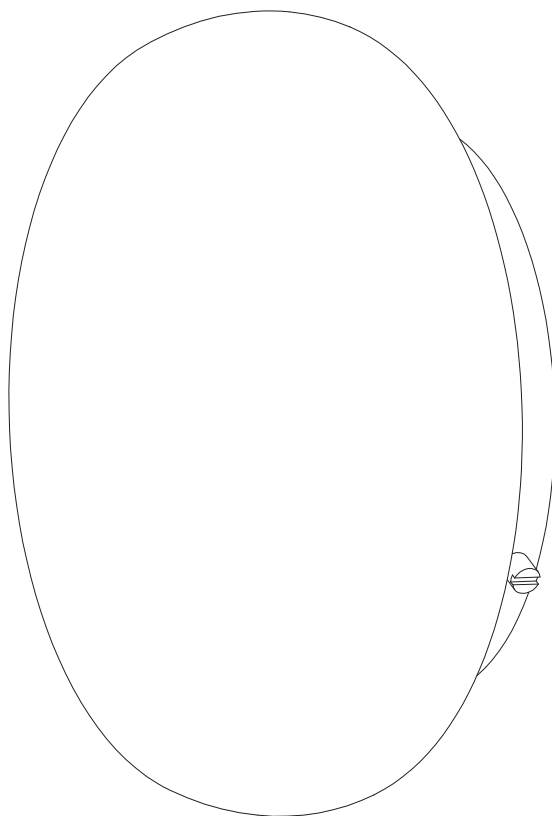

## Content of the box

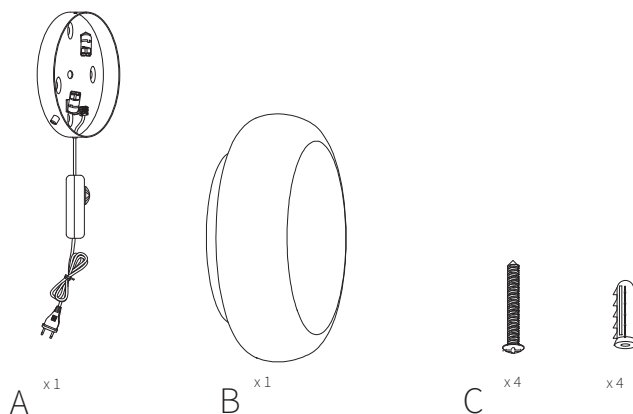

## TECHNICAL DATA

This product comes without bulbs. We recommend the following bulb specifications for your Opa Wall Lamp:

2 x G9 LED dimmable warm white LED bulbs, 2700 Kelvin, MAX 4 Watt.

The lamp can be fitted with LED bulbs and normal bulbs.

Gejst will not accept any responsibility for any accidents or injuries that occur due to the use of incorrect bulbs.

## ATTENTION



Please make sure to place the bulbs correctly when placing them inside the lamp. Make sure to turn off the power when installing the bulbs. The product must not be modified in any way. Gejst accepts no responsibility for any products that have been modified or tampered with. This lamp is designed for indoor use only.

The Opa Wall & Ceiling Lamp is designed only to be used with LED based light sources. Halogen or incandescent light sources cannot be used. Gejst accepts no responsibility for any damage due to the use of incorrect light sources.

- ① Decide the mounting and follow the steps.

A: Wired - Page 4


B: Hardwired - Page 6

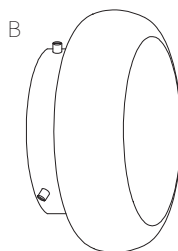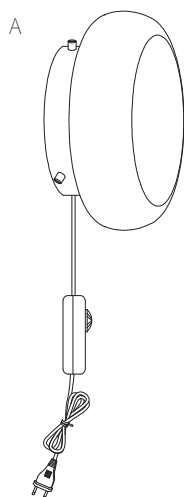

2

## A: Wired

Mount base (Part A) to the wall, using screws and plugs (Part C).

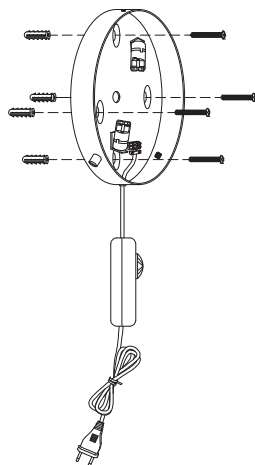


3


Bulbs not included.

Insert light bulbs in base (Part A).


2 x G9 LED dimmable warm white LED bulbs,  
2700 Kelvin, MAX 4W.

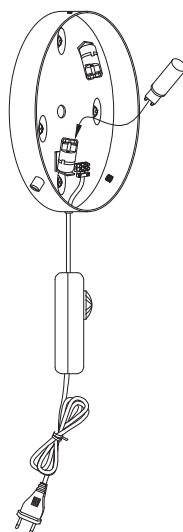

- ④ Insert the lampshade (Part B) into the base (Part A) and fasten the screws.

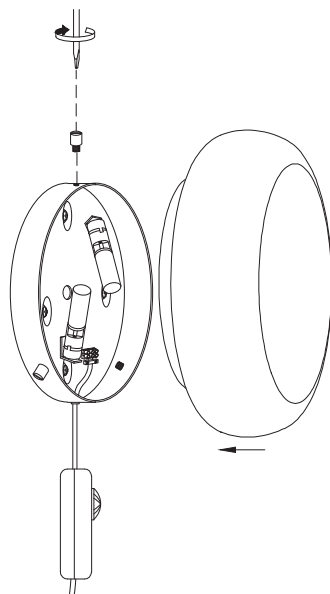


- ⑤ OPA is now assembled.

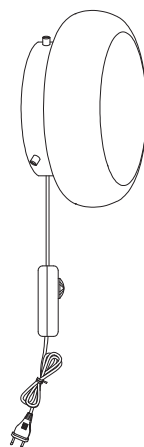

## B: Hardwired


6

Loosen screws to remove cable.

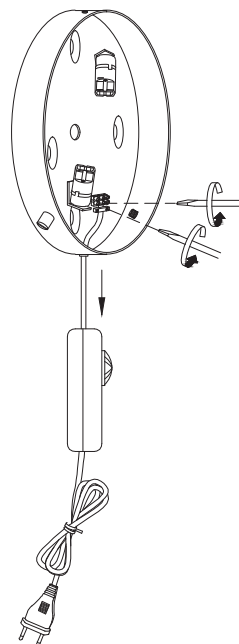


7

Mount the base (Part A) to the wall or ceiling with the screws and plugs (Part C).

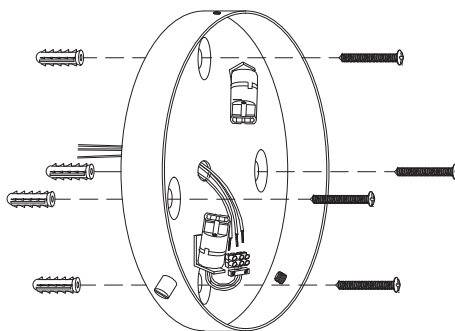


- ⑧ Connect the wire ends from the power cable to the cable connector inside the base (Part A).

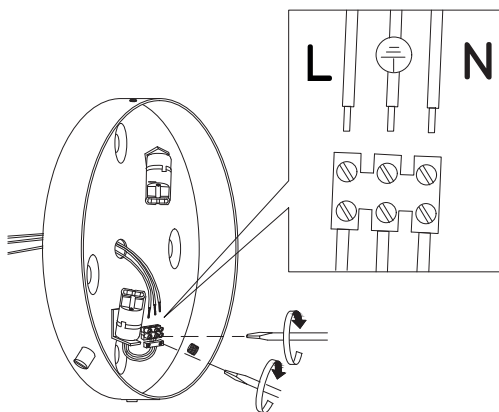


- ⑨ Bulbs not included.

Insert light bulbs in base (Part A).

2 x G9 LED dimmable warm white LED bulbs,  
2700 Kelvin, MAX 4W.

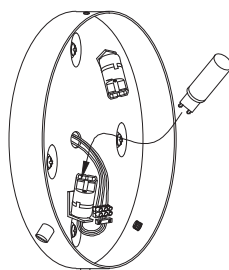

- ⑩ Insert the lampshade (Part B) into the base (Part A) and fasten with the screws.

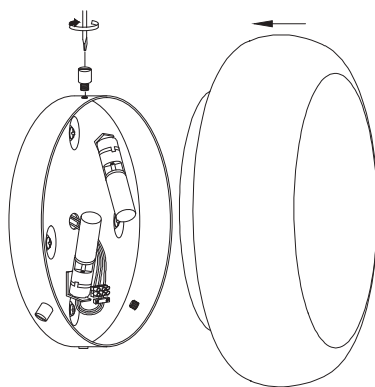

⑪

OPA is now assembled.

