


## Luminaire

Code 1242010A  
Name PIRCE SOFFITTO HALO BIANCO


## Measurerm.

Code FTS0002003  
Name PIRCE SOFFITTO HALO BIANCO

Luminaire Flux	4087 lm	Luminaire Power	330.0 W	Efficacy	12.383 lm/W	Efficiency	71.48%
Source Flux	5717 lm	Maximum value	366.32 cd/klm	Position	C=305.00 G=165.00	CG	Asymmetrical
Rectangular Luminaire Rectangular Luminous Area	Length Length	960 mm 137 mm	Width Width	960 mm 55 mm	Height Height	280 mm 0 mm	
Horizontal Luminous Area	0.007535 m2		Emitting area on Plane 180°	0.000000 m2			
Emitting area on Plane 0°	0.000000 m2		Emitting area on Plane 270°	0.000000 m2			
Emitting area on Plane 90°	0.000000 m2		Glare area at 76°	0.001823 m2			
Coordinate system	CG		Symmetry Type	Asymmetrical			
Date	13-06-2012		Maximum Gamma Angle	180			
Measurement Distance	0.00		Measurement Flux	5717 lm			
Lampada alogena lineare 330W R7S 230V							
C.I.E.	37 64 86 19 71		D DIN 5040	D23			
F UTE	0.14 H + 0.58 T		B NBN	BZ 6			

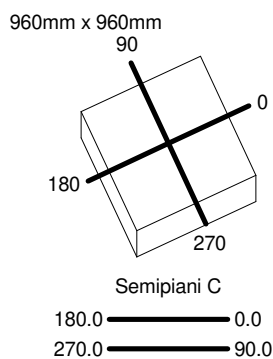

ULOR 57.65 %  
DLOR 13.83 %  
RN 80.65 %

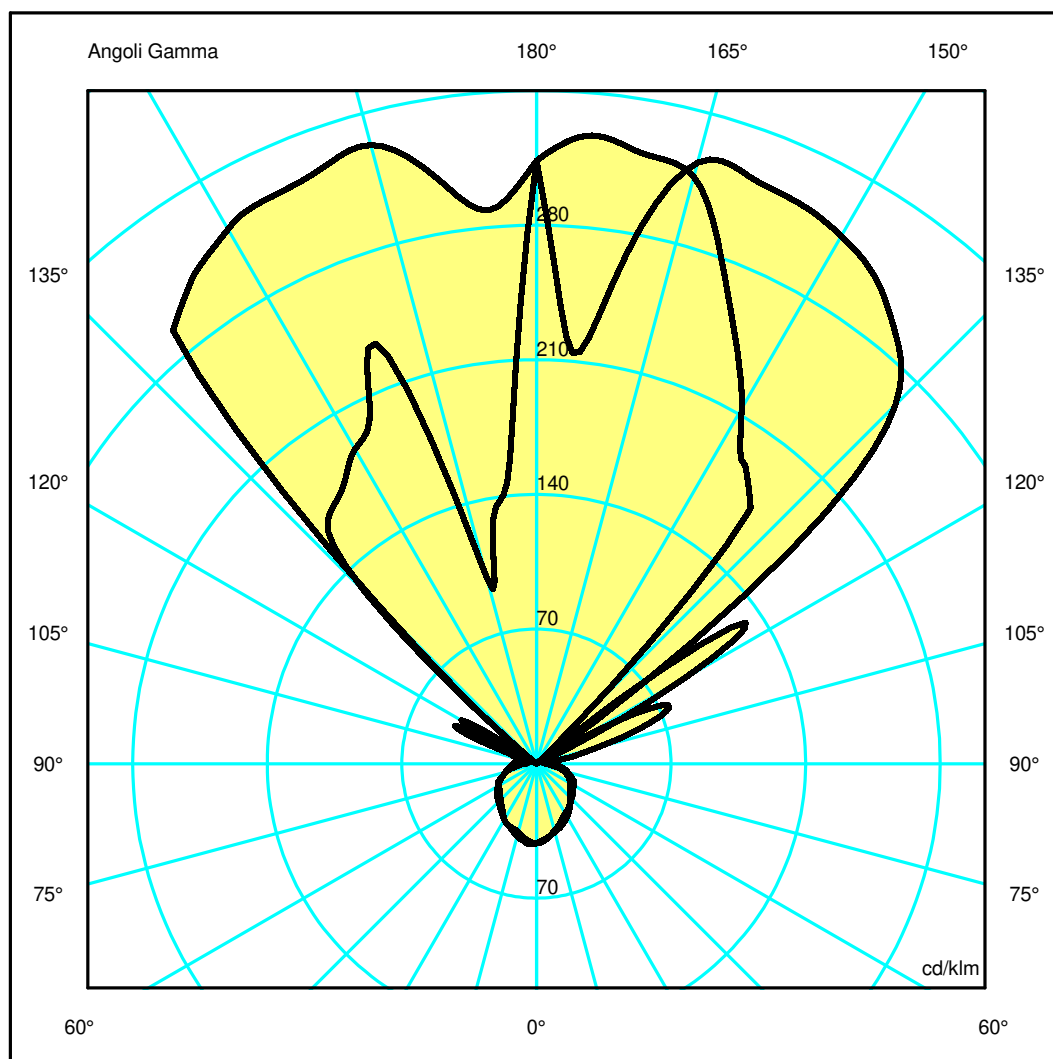

## Luminaire

Code 1242010A  
Name PIRCE SOFFITTO HALO BIANCO

## Measurement


Code FTS0002003  
Name PIRCE SOFFITTO HALO BIANCO

Luminaire Flux	4087 lm	Luminaire Power	330.0 W	Efficacy	12.383 lm/W	Efficiency	71.48%
Source Flux	5717 lm	Maximum value	366.32 cd/klm	Position	C=305.00 G=165.00	CG	Asymmetrical
Rectangular Luminaire		Length	960 mm	Width	960 mm	Height	280 mm
Rectangular Luminous Area		Length	137 mm	Width	55 mm	Height	0 mm
Horizontal Luminous Area		0.007535 m2		Emitting area on Plane 180°		0.000000 m2	
Emitting area on Plane 0°		0.000000 m2		Emitting area on Plane 270°		0.000000 m2	
Emitting area on Plane 90°		0.000000 m2		Glare area at 76°		0.001823 m2	
Coordinate system		CG		Symmetry Type		Asymmetrical	
Date		13-06-2012		Maximum Gamma Angle		180	
Measurement Distance		0.00		Measurement Flux		5717 lm	
Lampada alogena lineare 330W R7S 230V							
C.I.E.	37 64 86 19 71			D DIN 5040	D23		
F UTE	0.14 H + 0.58 T			B NBN	BZ 6		

Width at 50.00 % of Max Intensity

H[m]	1.00	2.00	3.00	4.00	5.00	H[m]	1.00	2.00	3.00	4.00	5.00
OA	0.76	1.53	2.29	3.06	3.82	OC	1.17	2.35	3.52	4.70	5.87
OB	0.17	0.34	0.51	0.68	0.85	OD	0.97	1.94	2.92	3.89	4.86

	Luminous Intensities [ cd/klm ]									
	0	5	15	25	35	45	55	65	75	85
OA	1792.74	1875.05	1806.81	1397.79	1081.70	152.35	706.87	40.84	17.23	32.36
OB	1792.74	909.11	570.92	1174.60	1003.57	718.76	24.44	268.22	57.52	63.86
OC	1792.74	1226.49	1850.21	1840.85	1759.62	1508.09	82.86	410.70	190.07	25.51
OD	1792.74	1651.31	1904.70	1861.06	1776.37	665.34	22.69	61.32	55.94	30.89

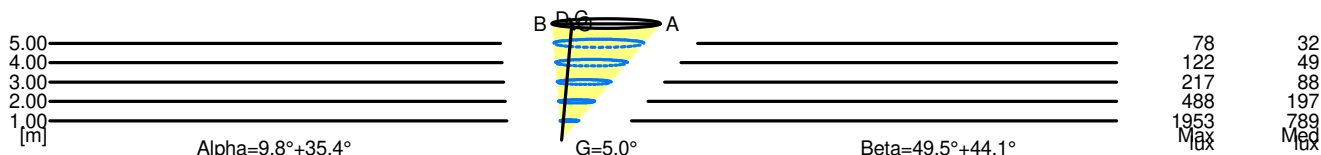

5.00	4.67	78	32	
4.00	3.74	122	49	
3.00	2.80	217	88	
2.00	1.87	488	197	
1.00	0.93	1953	789	
H[m]	D[m]	Max lux	Med lux	Alpha=9.8°+35.4° G=5.0

5.00	10.73	78	32	
4.00	8.58	122	49	
3.00	6.44	217	88	
2.00	4.29	488	197	
1.00	2.15	1953	789	
H[m]	D[m]	Max lux	Med lux	Beta=44.1°+49.5° G=0.0