





Driver 1-2x Downlights

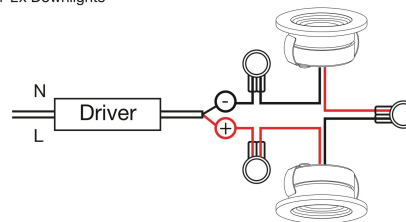

Driver and splitter
4-6x Downlights

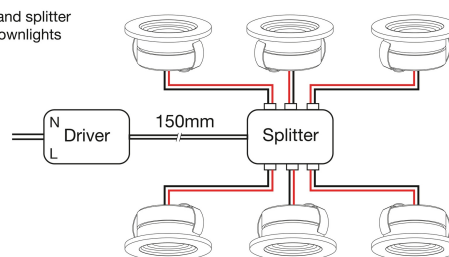

SLC MiniOne Driver 2,5-7V Ø25 5W Trailing edge IP20 1-2x

Driver for SLC MiniOne Downlights. Slim enough to go into the same hole as the spots. Minimum one and maximum of two downlights. Works with both the SLC MiniOne Tilt and the SLC MiniOne Fixed downlights.

Electrical

Input	220-240V 50/60Hz
Technology	Constant current (CC)
Voltage out range	3 V
Rated power	5 W
Power (W) multi	2-5 W
Power factor	0.9
Current out	700 mA
Control type	Trailing edge
Dimming output	AM - Amplitude modulation
MAX. qty on 16A Circuit Breaker (Type C)	118
Connection	15 cm cable with Wago connectors
Expected lifetime (25°C)	50 000 hours
Operating temperature (Ta)	-20°C - +50°C
Insulation class	Class II
SELV	Yes
Power range	2 W

Mechanical

Material, main	Plastic
IP rating	IP20
Suitable for	Indoor use only

Dimensions

Cut-out	Ø25 mm
Height	20 mm
Width	18.5 mm
Length	100 mm
Product net weight	60 g
Diameter	25 mm