



SLC DL04 SQUARE Single R83 WH TED 930 IP54 36°

14/01/2022

SLC1238


Product description

Square, tiltable recessed luminaire in contemporary design. Comfortable, low glare light UGR<22. Very good color rendering CRI>90. Supplied complete with driver.

Square, tiltable recessed luminaire in contemporary design. Pleasant, low glare light UGR<22. Very good color rendering CRI>90. Suitable for Outdoor-Use IP54. High lumen output. Quick connector loop-in / loop-out. Supplied complete with driver. 16mm cable tube.



Technical data


Suitable for built-in mounting	Yes
Adjustability	Swivelling
Material housing	Aluminium
Colour housing	White
LED nominal current at constant current	220 - 220 mA
Control gear included	Yes
Reflector	High-gloss
Light sharing	Symmetric
Light outlet	Direct
Degree of protection (IP)	IP54
Rated ambient temperature according to IEC	-20 - 45 °C
Colour of light	White
Colour rendering index CRI	90-100

Suitable for ceiling mounting	Yes
Lamp type	LED not exchangeable
Surface protection	Powder coating
Material cover	Plastic, transparent
Type of control gear	LED operating device current-controlled
Dimming phase cut-off	Yes
Light distributor	Reflector
Beam angle	Medium beam 21-40°
Rated life time L90/B10 at 25 °C	100000 h
Protection class	I
Max. system power	9,6 W
Colour temperature	3000 - 3000 K
Rated luminous flux according to IEC 62722-	647 lm




Lamp efficacy	67 lm/W
Height/depth	60 mm
Type of wiring	Suitable for through wiring
Conductor cross section	0,35 mm ²
Connection type	Plug clamp
Colour consistency (McAdam ellipse)	SDCM3
Colour rendering index (CRI/Ra)	90
Tilt-able (°)	25
Cut-out hole (Ø: mm)	83
Dimmable	Yes
Brand	SLC
Produced by	The Light Group

Width	96 mm
Length	96 mm
Number of poles	2
Connectable conductor cross section	1,5 - 2,5 mm ²
Luminaire efficacy	67 lm/W
Strain relief	Yes
Beam angle (°)	36
Glare (UGR)	UGR<22
Dimming method	Trailing edge
Dimming range	1-100%
GTIN	7070938065566

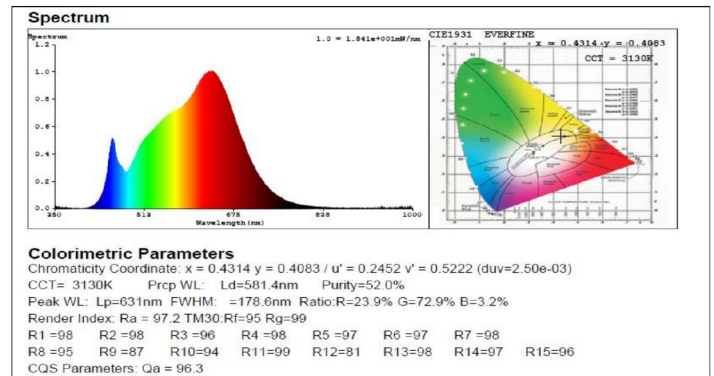





 **ENERG** 


Scandinavian Lighting Concept
SLC1238


A 


B 

C 

D 

E 

F  

G 

9
kWh/1000h



2019/2015

