GRAU

Falling Sun

Falling Sun ist die elegante Pendelleuchte. Die optische Linse lenkt das Licht blendfrei und lichtstark 360° nach außen. Nutze Falling Sun über dem Tisch, Tresen, am Bett oder als skulpturalen Lüster im Raum.


Sunset Dimming schafft ein warmes und gesundes Licht. Per GRAU App kannst du das Licht einfach steuern. Falling Sun ist aus Aluminium gefertigt – made in Germany.

Falling Sun ist mit zahlreichen Designpreisen ausgezeichnet. Designed und gefertigt am GRAU Campus in Deutschland.

Farben

Farben	Artikelnummer
Polished	FAU3-310-99
Sun Orange	FAU3-310-08
Sand White	FAU3-310-05
White	FAU3-310-01
Black	FAU3-310-00

Dimensionen

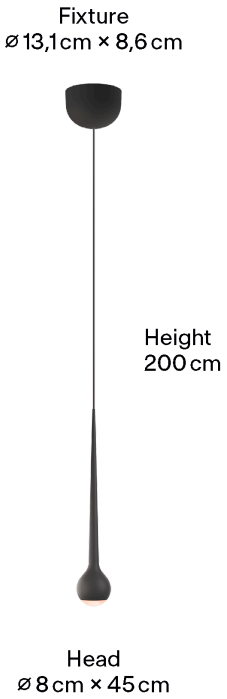

Body

Pendellänge	2m
Maße Verpackung (L x B x H)	80cm x 21cm x 10cm
Material	Aluminium
Oberfläche	Pulverbeschichtet
Gewicht	1,3kg
Gewicht inkl. Verpackung	1,7kg
Montageart	Deckenaufbau
Nennspannung	220–240V
Leistungsaufnahme	14W
Leuchteneffizienz	61lm/W
Anschlussleitung (Ader-Zahl)	3
Schutzklasse	I
Artikelnummer	FAU3-310-00

Licht

Leuchtmittel	LED
Leuchtenlichtstrom	850lm
Farbwiedergabeindex	CRI >90
Lichtaustritt	Direkt
Abstrahlwinkel	54°
Lichtverteilung	Symmetrisch
Farbtemperatur	2700–1300K
Lichtfarbe	Warmweiß
Dimmbar	Ja
Art der Dimmung	Phasenabschnitt
GRAU App Upgrades möglich	Ja
Sunset Dimming	Ja

GRAU

Falling Sun

Falling Sun is the elegant pendant luminaire. The optical lens directs the light glare-free and brightly 360° outwards. Use Falling Sun above the table, counter, by the bed or as a sculptural chandelier in the room.


Sunset Dimming creates a warm and healthy light. You can easily control the light using the GRAU app. Falling Sun is made of aluminum – made in Germany.

Falling Sun has been awarded numerous design awards. Designed and manufactured at the GRAU Campus in Germany.

Colors

Colors	SKU
Polished	FAU3-310-99
Sun Orange	FAU3-310-08
Sand White	FAU3-310-05
White	FAU3-310-01
Black	FAU3-310-00

Dimensions

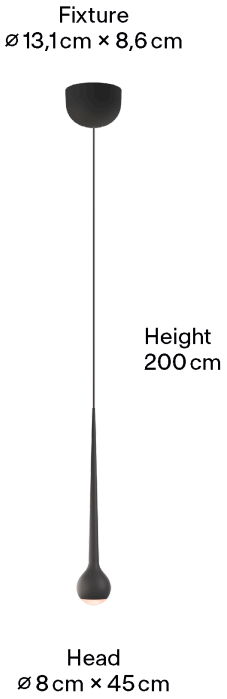

Body

Pendant length	2m
Packaging dimensions (L x W x H)	80cm x 21cm x 10cm
Material	Aluminium
Surface	Powder-coated
Weight	1,3kg
Weight incl. packaging	1,7kg
Mounting type	Ceiling-mounted (surface)
Rated voltage	220–240V
Power consumption	14W
Luminaire efficiency	61lm/W
Connection cable (number of cores)	3
Protection class	I

Light

Light source	LED
Luminous flux	850lm
Color rendering index	CRI >90
Light emission	Direct
Beam angle	54°
Light distribution	Symmetric
Color temperature	2700–1300K
Light color	Warm White
Dimmable	Yes
Type of dimming	Trailing edge
Sunset Dimming	Yes