

PARETE / WALL

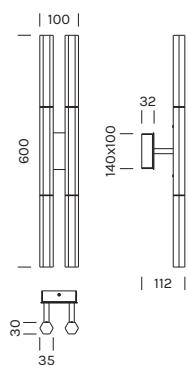
## SHINE PLUMAGE AP





Ottone e plexiglass  
Fascio di luce diffuso  
Driver: incluso

Brass and plexiglass  
Light beam: diffused  
Driver: included

9348	M 2700°K	W 3000°K	N 4000°K
<b>Potenza/ Power</b>	4x 4W	4x 4W	4x 4W
<b>Lumen</b>	4x 380 lm	4x 410 lm	4x 410 lm
<b>CRI</b>	>90	>90	>90
<b>Alimentazione/ Supply</b>	220-240Vac	220-240Vac	220-240Vac



Articolo Item	Temperatura Temperature	Finitura Finish
<b>9348</b>	<b>M</b>	<b>-BV</b> 
	<b>W</b>	<b>-NO</b> 
	<b>N</b>	<b>-OS</b> 