

## Luminaire


Code 0692020A  
Name LOGICO MINI PLAFONE

## Measurerm.

Code FTS0002504  
Name LOGICO MINI PLAFONE

Luminaire Flux	1083.47 lm	Luminaire Power	70.00 W	Efficacy	15.48 lm/W	Efficiency	91.82%
Lamps Flux	1180.00 lm	Maximum value	136.82 cd/klm	Position	C=75.00 G=30.00	CG	Asymmetrical
Round Luminaire Round Luminous Area		Diam. Diam.	280 mm 280 mm	Height Height	230 mm 230 mm		
Horizontal Luminous Area Emitting area on Plane 0° Emitting area on Plane 90°		0.061575 m2 0.064400 m2 0.064400 m2		Emitting area on Plane 180° Emitting area on Plane 270° Glare area at 76°		0.064400 m2 0.064400 m2 0.077383 m2	
Coordinate system Date Measurement Distance		CG 02-09-2002 0.00		Symmetry Type Maximum Gamma Angle Measurement Flux		Asymmetrical 180 1180.00 lm	
70W HSGST E27							
C.I.E. F UTE	31 54 77 58 92 0.54 H + 0.38 T			D DIN 5040 B NBN		C21 BZ 7	


Diam=280mm

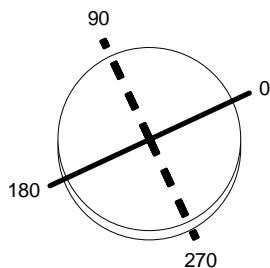

Semipiani C

180.0 ——— 0.0  
270.0 - - - - 90.0

ULOR 38.21 %  
DLOR 53.61 %  
RN 41.62 %

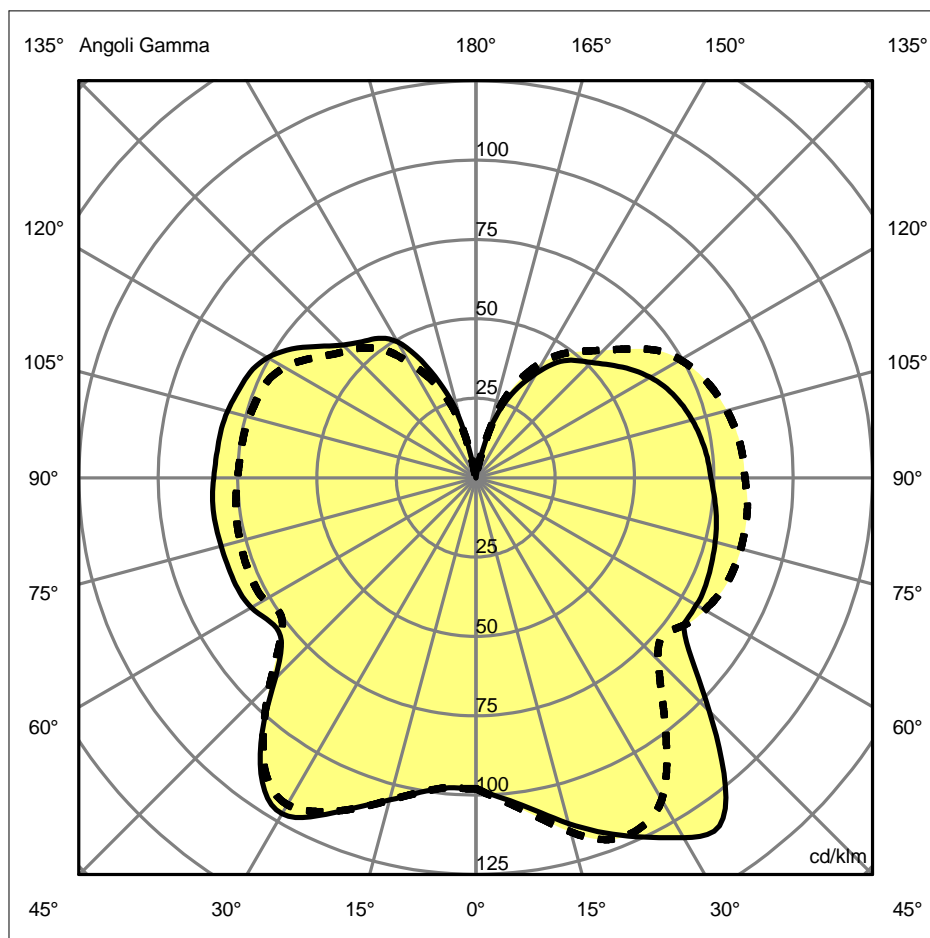

<b>Luminaire</b>							
Code	0692020A						
Name	LOGICO MINI PLAFONE						
<b>Measurem.</b>							
Code	FTS0002504						
Name	LOGICO MINI PLAFONE						
Luminaire Flux	1083.47 lm	Luminaire Power	70.00 W	Efficacy	15.48 lm/W	Efficiency	91.82%
Lamps Flux	1180.00 lm	Maximum value	136.82 cd/klm	Position	C=75.00 G=30.00	CG	Asymmetrical
Round Luminaire		Diam.	280 mm	Height	230 mm		
Round Luminous Area		Diam.	280 mm	Height	230 mm		
Horizontal Luminous Area		0.061575 m2		Emitting area on Plane 180°		0.064400 m2	
Emitting area on Plane 0°		0.064400 m2		Emitting area on Plane 270°		0.064400 m2	
Emitting area on Plane 90°		0.064400 m2		Glare area at 76°		0.077383 m2	
Coordinate system		CG		Symmetry Type		Asymmetrical	
Date		02-09-2002		Maximum Gamma Angle		180	
Measurement Distance		0.00		Measurement Flux		1180.00 lm	
70W HSGST E27							
C.I.E.	31 54 77 58 92			D DIN 5040	C21		
F UTE	0.54 H + 0.38 T			B NBN	BZ 7		

Apertura a destra non trovata, gamma =34

Apertura a destra non trovata, gamma =34

Apertura a destra non trovata, gamma =34

**Luminaire**

Code 0692020A  
Name LOGICO MINI PLAFONE

**Measurement**

Code FTS0002504  
Name LOGICO MINI PLAFONE

Luminaire Flux	1083.47 lm	Luminaire Power	70.00 W	Efficacy	15.48 lm/W	Efficiency	91.82%
Lamps Flux	1180.00 lm	Maximum value	136.82 cd/klm	Position	C=75.00 G=30.00	CG	Asymmetrical

**UGR**  
S = 0.250

Reflectancies										
Ceiling/Cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
WorkingPlane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
RoomDimensions	ViewedCrosswise					ViewedEndwise				
x=2H y=2H	9.5	10.5	10.3	11.3	12.3	9.4	10.4	10.3	11.3	12.3
x=2H y=3H	12.2	13.1	13.0	14.0	14.8	12.0	12.9	12.8	13.8	14.8
x=2H y=4H	13.6	14.5	14.5	15.3	16.1	13.3	14.2	14.2	15.1	16.1
x=2H y=6H	15.0	15.8	15.9	16.7	17.5	14.7	15.5	15.5	16.4	17.5
x=2H y=8H	15.7	16.5	16.6	17.4	18.1	15.3	16.1	16.2	17.0	18.1
x=2H y=12H	16.4	17.2	17.3	18.1	18.8	16.0	16.7	16.9	17.6	18.8
x=4H y=2H	10.4	11.2	11.2	12.1	13.1	10.2	11.1	11.1	12.0	13.1
x=4H y=3H	13.2	13.9	14.1	14.9	15.8	13.0	13.7	13.9	14.6	15.8
x=4H y=4H	14.7	15.4	15.6	16.3	17.2	14.5	15.1	15.4	16.1	17.2
x=4H y=6H	16.3	16.9	17.2	17.8	18.7	16.0	16.6	16.9	17.5	18.7
x=4H y=8H	17.1	17.7	18.0	18.6	19.4	16.7	17.3	17.7	18.2	19.4
x=4H y=12H	17.9	18.4	18.8	19.4	20.2	17.5	18.0	18.4	19.0	20.2
x=8H y=4H	15.3	15.9	16.2	16.8	17.7	15.0	15.6	15.9	16.5	17.7
x=8H y=6H	17.1	17.6	18.0	18.5	19.4	16.8	17.2	17.7	18.2	19.4
x=8H y=8H	18.0	18.5	19.0	19.4	20.3	17.7	18.1	18.6	19.1	20.3
x=8H y=12H	19.0	19.4	20.0	20.3	21.2	18.6	19.0	19.6	20.0	21.2
x=12H y=4H	15.4	16.0	16.4	16.9	17.8	15.1	15.6	16.0	16.6	17.8
x=12H y=6H	17.3	17.7	18.3	18.7	19.6	16.9	17.4	17.9	18.3	19.6
x=12H y=8H	18.3	18.7	19.3	19.7	20.5	17.9	18.3	18.9	19.3	20.5