



BTNM 101.30.55

Button Mini 100 (1xLED 15W 830/3000K 1200lm 55 °)

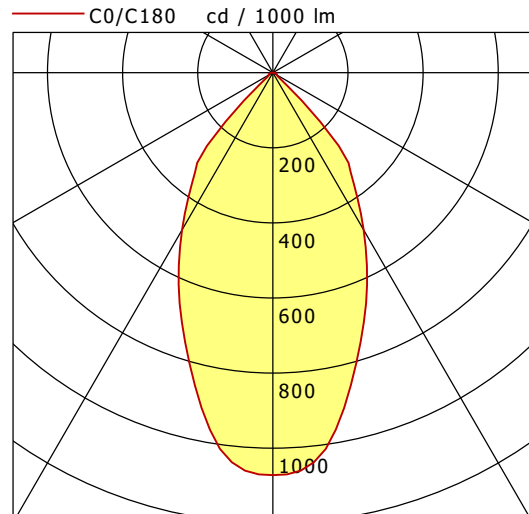

	C0	C90	C180	C270
0°	1072	1072	1072	1072
15°	831	831	831	831
30°	484	484	484	484
45°	143	143	143	143
60°	12	12	12	12
75°	9	9	9	9
90°	0	0	0	0
cd / 1000 lm				

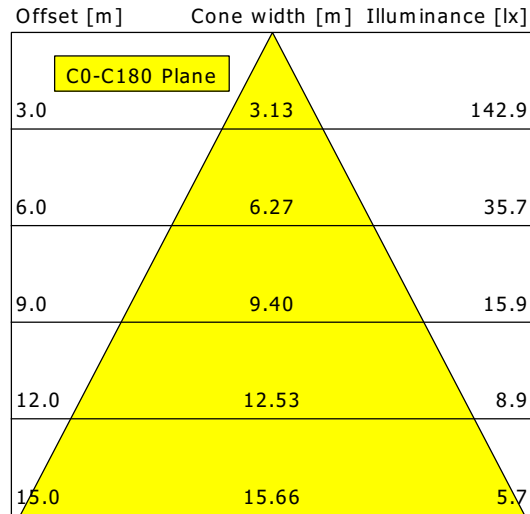

η	LED
Efficiency	80 lm/W
Direct/Indirect	↓ 100% / ↑ 0%
System Power	15 W
UGR	X=4H, Y=8H
Reflection factors	70/50/20
UGR C0/C180	23.7
UGR C90/C270	23.7
CIE Flux Codes	87 97 99 100 100
Ra/CRI	>80