


## Luminaire

Code DX0070A0M  
Name ITKA BASE MARMO

## Measur.

Code FTS1600649  
Name ITKA BASE MARMO

Luminaire Flux	725.30 lm	Luminaire Power	9.00 W	Efficacy	80.59 lm/W	Efficiency	100.00%
Lamps Flux	725.30 lm	Maximum value	208.05 cd/klm	Position	C=0.00 G=180.00	CG	Rotosymmetrical
Round Luminaire		Diam.	350 mm	Height	245 mm		
Round Luminous Area		Diam.	350 mm	Height	120 mm		
Horizontal Luminous Area		0.096211 m2		Emitting area on Plane 180°		0.042000 m2	
Emitting area on Plane 0°		0.042000 m2		Emitting area on Plane 270°		0.042000 m2	
Emitting area on Plane 90°		0.042000 m2		Glare area at 76°		0.064028 m2	
Coordinate system		CG		Symmetry Type		Rotosymmetrical	
Date		30-10-2015		Maximum Gamma Angle		180	
Measurement Distance		0.00		Measurement Flux		725.30 lm	
LED Flux=930lm LED Power=7.5W Eff=77% EfcLed=124lm/W EfcLum=81lm/W Ra=80 SDCM=3 L70(6K)=L70>50000							
C.I.E.	26 54 79 29 100			D DIN 5040		D13	
F UTE	0.29 J + 0.71 T			B NBN		BZ 8 / 0.8 / BZ 7	

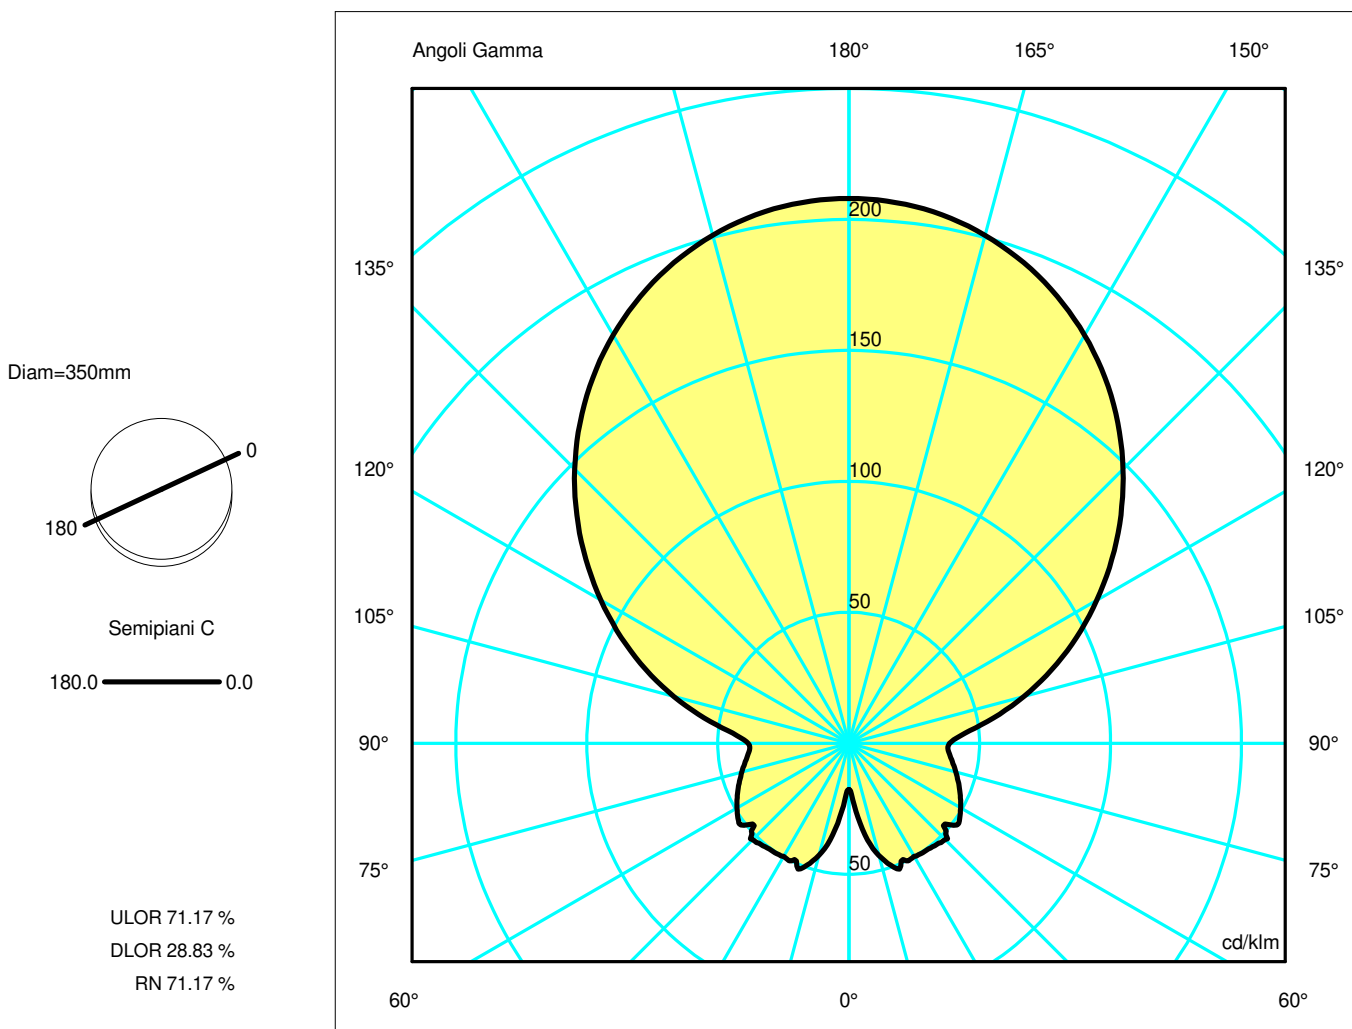

## Luminaire

Code DX0070A0M  
Name ITKA BASE MARMO

## Measurerm.

Code FTS1600649  
Name ITKA BASE MARMO

Luminaire Flux	725.30 lm	Luminaire Power	9.00 W	Efficacy	80.59 lm/W	Efficiency	100.00%
Lamps Flux	725.30 lm	Maximum value	208.05 cd/klm	Position	C=0.00 G=180.00	CG	Rotosymmetrical
Round Luminaire		Diam.	350 mm	Height	245 mm		
Round Luminous Area		Diam.	350 mm	Height	120 mm		
Horizontal Luminous Area		0.096211 m <sup>2</sup>		Emitting area on Plane 180°		0.042000 m <sup>2</sup>	
Emitting area on Plane 0°		0.042000 m <sup>2</sup>		Emitting area on Plane 270°		0.042000 m <sup>2</sup>	
Emitting area on Plane 90°		0.042000 m <sup>2</sup>		Glare area at 76°		0.064028 m <sup>2</sup>	
Coordinate system		CG		Symmetry Type		Rotosymmetrical	
Date		30-10-2015		Maximum Gamma Angle		180	
Measurement Distance		0.00		Measurement Flux		725.30 lm	


LED Flux=930lm LED Power=7.5W Eff=77% EfcLed=124lm/W EfcLum=81lm/W Ra=80 SDCM=3 L70(6K)=L70>50000

C.I.E.	26 54 79 29 100	D DIN 5040	D13
F UTE	0.29 J + 0.71 T	B NBN	BZ 8 / 0.8 / BZ 7

Width at 50.00 % of Max Intensity

H[m]	1.00	2.00	3.00	4.00	5.00	H[m]	1.00	2.00	3.00	4.00	5.00
OA	1.88	3.76	5.64	7.51	9.39	OC	1.88	3.76	5.64	7.51	9.39
OB	1.88	3.76	5.64	7.51	9.39	OD	1.88	3.76	5.64	7.51	9.39

	Luminous Intensities [ cd/klm ]									
	0	5	15	25	35	45	55	65	75	85
OA	150.90	150.35	145.67	136.58	123.62	107.40	88.92	69.56	50.16	32.30
OB	150.90	150.35	145.67	136.58	123.62	107.40	88.92	69.56	50.16	32.30
OC	150.90	150.35	145.67	136.58	123.62	107.40	88.92	69.56	50.16	32.30
OD	150.90	150.35	145.67	136.58	123.62	107.40	88.92	69.56	50.16	32.30

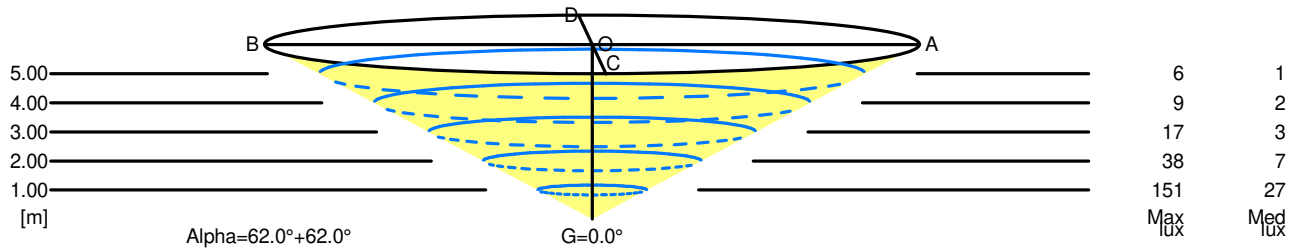

5.00	18.79	6	1			
4.00	15.03	9	2			
3.00	11.27	17	3			
2.00	7.51	38	7			
1.00	3.76	151	27			
H[m]	D[m]	Max lux	Med lux	Alpha=62.0°+62.0°	G=0.0	