


Luminaire

Code 1451010A
Name LOOK AT ME 35 S

Measurem.

Code FTS2000712
Name LOOK AT ME 35 S

Luminaire Flux	692.30 lm	Luminaire Power	20.00 W	Efficacy	34.61 lm/W	Efficiency	100.00%
Lamps Flux	692.30 lm	Maximum value	346.58 cd/klm	Position	C=0.00 G=0.00	CG	Rotosymmetrical
Round Luminaire Round Luminous Area	Diam. 350 mm Diam. 335 mm	Height	235 mm	Height	0 mm		
Horizontal Luminous Area Emitting area on Plane 0° Emitting area on Plane 90°	0.088141 m2 0.000000 m2 0.000000 m2	Emitting area on Plane 180° Emitting area on Plane 270° Glare area at 76°	0.000000 m2 0.000000 m2 0.021323 m2				
Coordinate system Date Measurement Distance	CG 26-02-2020 0.00	Symmetry Type Maximum Gamma Angle Measurement Flux	Rotosymmetrical 180 692.30 lm				
LED Flux=2022.5lm LED Power=17.5W Eff=34% EfcLed=116lm/W EfcLum=35lm/W CCT=3000K Ra=90 SDCM=2 L70(6K)=50000h							
C.I.E. F UTE	48 80 96 92 100 0.92 E + 0.08 T	D DIN 5040 B NBN	A31 BZ 4				

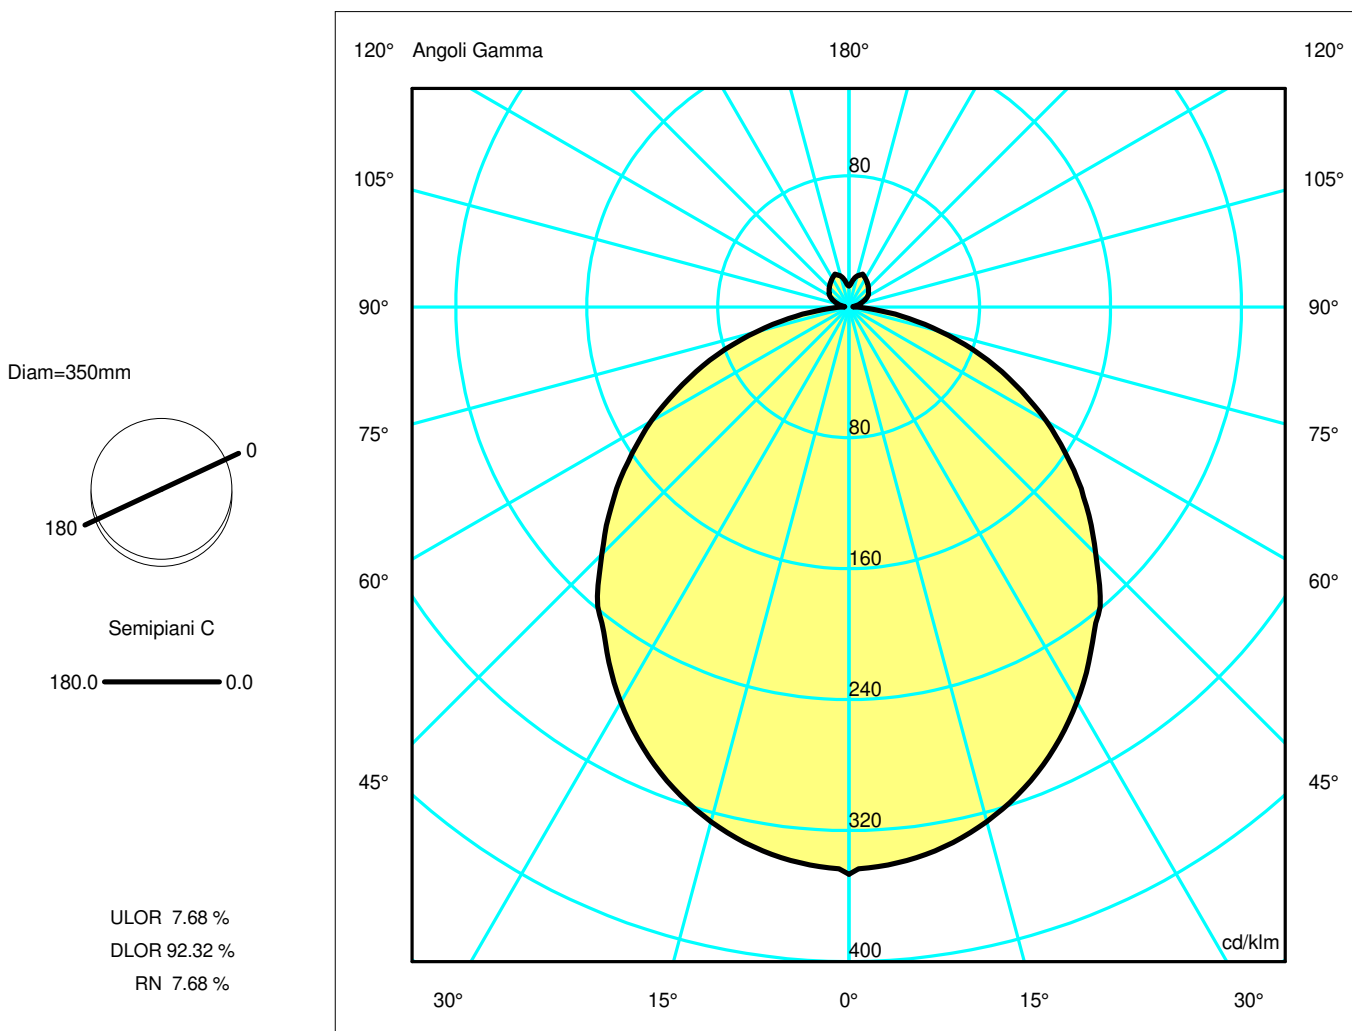

Luminaire

Code 1451010A
Name LOOK AT ME 35 S

Measurement


Code FTS2000712
Name LOOK AT ME 35 S

Luminaire Flux	692.30 lm	Luminaire Power	20.00 W	Efficacy	34.61 lm/W	Efficiency	100.00%
Lamps Flux	692.30 lm	Maximum value	346.58 cd/klm	Position	C=0.00 G=0.00	CG	Rotosymmetrical
Round Luminaire		Diam.	350 mm	Height	235 mm		
Round Luminous Area		Diam.	335 mm	Height	0 mm		
Horizontal Luminous Area	0.088141 m2			Emitting area on Plane 180°	0.000000 m2		
Emitting area on Plane 0°	0.000000 m2			Emitting area on Plane 270°	0.000000 m2		
Emitting area on Plane 90°	0.000000 m2			Glare area at 76°	0.021323 m2		
Coordinate system	CG	Symmetry Type		Maximum Gamma Angle	180		Rotosymmetrical
Date	26-02-2020	Measurement Flux			692.30 lm		
Measurement Distance	0.00						
LED Flux=2022.5lm LED Power=17.5W Eff=34% EfcLed=116lm/W EfcLum=35lm/W CCT=3000K Ra=90 SDCM=2 L70(6K)=50000h							
C.I.E.	48 80 96 92 100	D DIN 5040		A31			
F UTE	0.92 E + 0.08 T	B NBN		BZ 4			

Width at 50.00 % of Max Intensity

H[m]	1.00	2.00	3.00	4.00	5.00	H[m]	1.00	2.00	3.00	4.00	5.00
OA	1.34	2.69	4.03	5.37	6.72	OC	1.34	2.69	4.03	5.37	6.72
OB	1.34	2.69	4.03	5.37	6.72	OD	1.34	2.69	4.03	5.37	6.72

	Luminous Intensities [cd/klm]									
	0	5	15	25	35	45	55	65	75	85
OA	239.94	236.01	225.37	205.82	178.34	147.67	113.88	77.64	40.33	8.60
OB	239.94	236.01	225.37	205.82	178.34	147.67	113.88	77.64	40.33	8.60
OC	239.94	236.01	225.37	205.82	178.34	147.67	113.88	77.64	40.33	8.60
OD	239.94	236.01	225.37	205.82	178.34	147.67	113.88	77.64	40.33	8.60

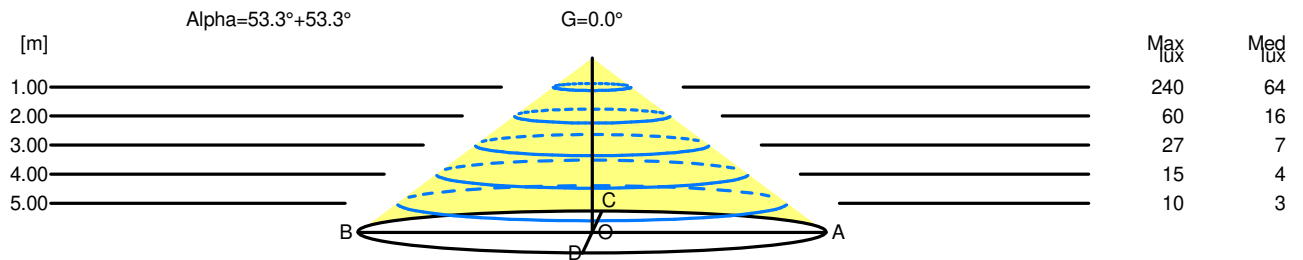

H[m]	D[m]	Max lux	Med lux	Alpha=53.3°+53.3°	G=0.0
1.00	2.69	240	64		
2.00	5.37	60	16		
3.00	8.06	27	7		
4.00	10.75	15	4		
5.00	13.43	10	3		