

Luminaire


Code 1051010A
Name CASTORE SOSPENSIONE 420

Measur.

Code FTS0002067
Name CASTORE SOSPENSIONE 420

Efficiency	90.46%	Coordinate system	CG	Total Flux	4200.00 lm
Maximum value	78.49 cd/klm	Position	C=0.00 G=100.00	Rotosymmetrical	
Round Luminaire	Diam. 420 mm	Height	420 mm		
Round Luminous Area	Diam. 420 mm	Height	420 mm		
Horizontal Luminous Area	0.138544 m ²	Emitting area on Plane 180°	0.176400 m ²		
Emitting area on Plane 0°	0.176400 m ²	Emitting area on Plane 270°	0.176400 m ²		
Emitting area on Plane 90°	0.176400 m ²	Glare area at 76°	0.204677 m ²		
Date	11-11-2014	Maximum Gamma Angle	180		
Measurement Distance	0.00	Measurement Flux	4200.00 lm		
64404					
C.I.E.	23 47 73 50 90	D DIN 5040	C11		
F UTE	0.45 J + 0.46 T	B NBN	BZ 9 / 0.8 / BZ 8 / 1 / BZ 9 / 2.5 / BZ 8 / 3 / BZ 9		


Diam=420mm

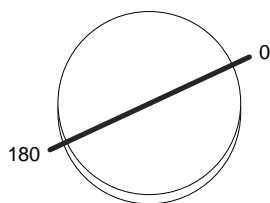

Semipiani C

180.0 ——— 0.0

ULOR 45.60 %
DLOR 44.86 %
RN 50.41 %

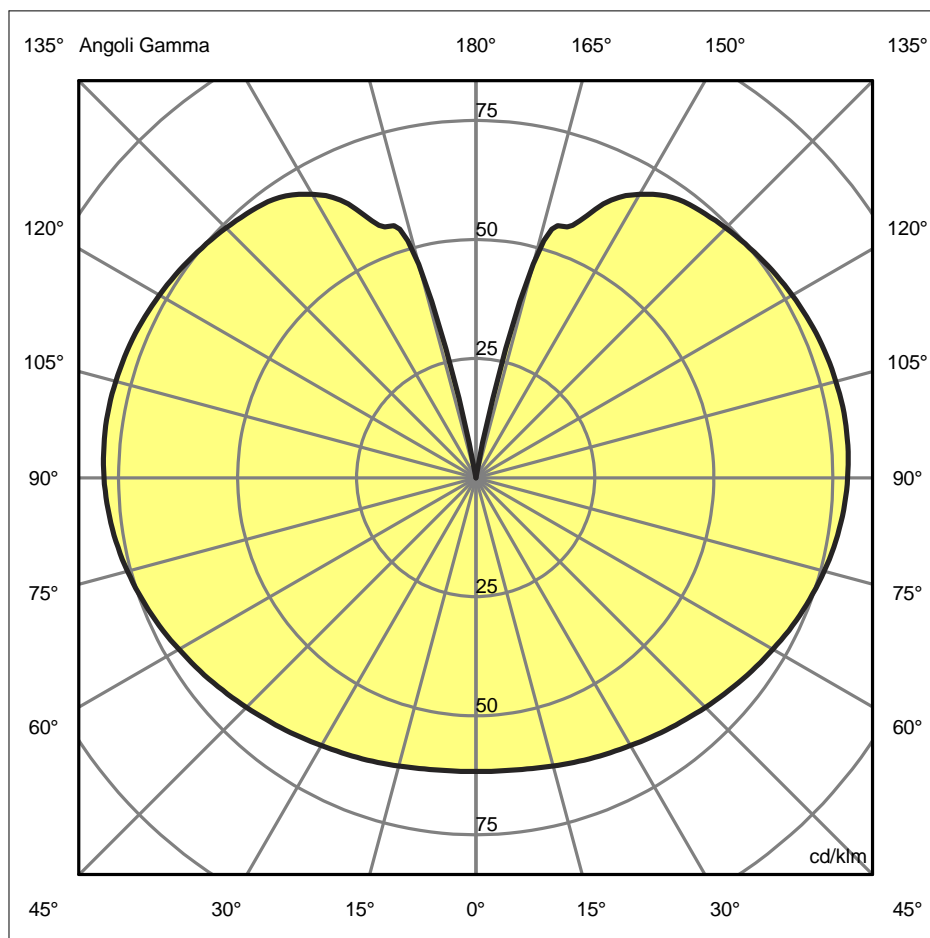

Luminaire

Code 1051010A
Name CASTORE SOSPENSIONE 420

Measurement

Code FTS0002067
Name CASTORE SOSPENSIONE 420

Efficiency	90.46%	Coordinate system	CG	Total Flux	4200.00 lm
Maximum value	78.49 cd/klm	Position	C=0.00 G=100.00	Rotosymmetrical	
Round Luminaire	Diam.	420 mm	Height	420 mm	
Round Luminous Area	Diam.	420 mm	Height	420 mm	
Horizontal Luminous Area	0.138544 m2	Emitting area on Plane 180°		0.176400 m2	
Emitting area on Plane 0°	0.176400 m2	Emitting area on Plane 270°		0.176400 m2	
Emitting area on Plane 90°	0.176400 m2	Glare area at 76°		0.204677 m2	
Date	11-11-2014	Maximum Gamma Angle		180	
Measurement Distance	0.00	Measurement Flux		4200.00 lm	
64404					
C.I.E.	23 47 73 50 90	D DIN 5040	C11		
F UTE	0.45 J + 0.46 T	B NBN	BZ 9 / 0.8 / BZ 8 / 1 / BZ 9 / 2.5 / BZ 8 / 3 / BZ 9		

Apertura a destra non trovata, gamma =81

Apertura a destra non trovata, gamma =81