


Luminaire

Code 1753020A
Name LA PETITE LETTURA BIANCO

Measurem.

Code FTS1700001
Name LA PETITE LETTURA BIANCO

Luminaire Flux	675.87 lm	Luminaire Power	11.00 W	Efficacy	61.44 lm/W	Efficiency	57.35%
Lamps Flux	1178.40 lm	Maximum value	163.85 cd/klm	Position	C=0.00 G=1.00	CG	Rotosymmetrical
Round Luminaire Round Luminous Area	Diam. 300 mm Diam. 300 mm	Height	208 mm	Height	0 mm		
Horizontal Luminous Area Emitting area on Plane 0° Emitting area on Plane 90°	0.070686 m2 0.000000 m2 0.000000 m2	Emitting area on Plane 180° Emitting area on Plane 270° Glare area at 76°	0.000000 m2 0.000000 m2 0.017100 m2				
Coordinate system Date Measurement Distance	CG 21-12-2016 0.00	Symmetry Type Maximum Gamma Angle Measurement Flux	Rotosymmetrical 180 1178.40 lm				
LED Parathom 11W E27							
C.I.E. F UTE	47 78 95 82 57 0.47 E + 0.10 T	D DIN 5040 B NBN	B31 BZ 5				

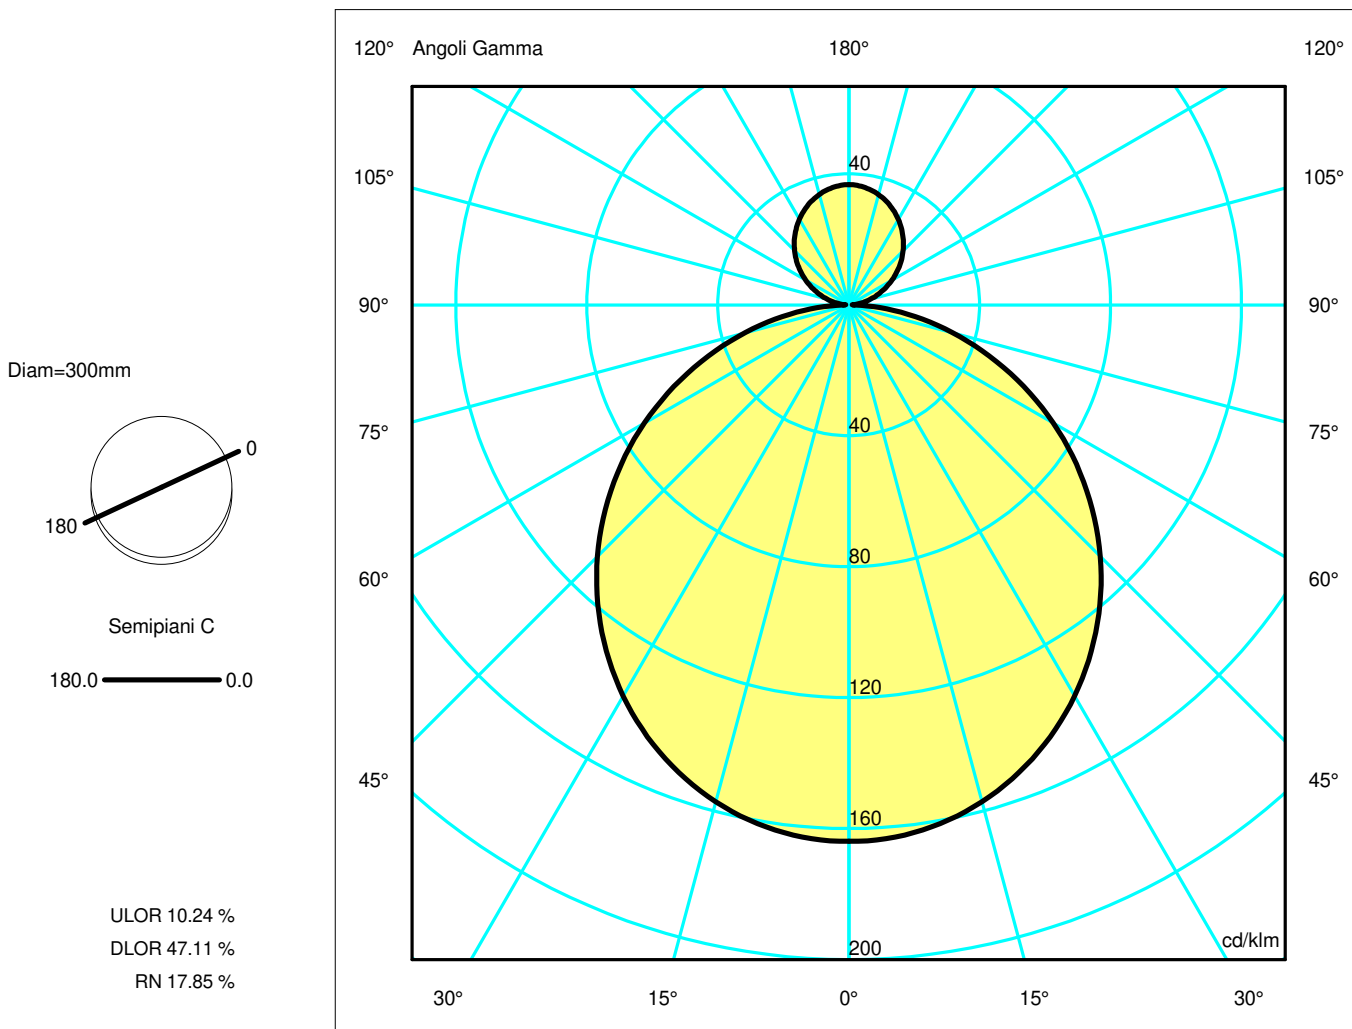

Luminaire

Code 1753020A
Name LA PETITE LETTURA BIANCO

Measur.


Code FTS1700001
Name LA PETITE LETTURA BIANCO

Luminaire Flux	675.87 lm	Luminaire Power	11.00 W	Efficacy	61.44 lm/W	Efficiency	57.35%
Lamps Flux	1178.40 lm	Maximum value	163.85 cd/klm	Position	C=0.00 G=1.00	CG	Rotosymmetrical
Round Luminaire Round Luminous Area		Diam. Diam.	300 mm 300 mm	Height Height	208 mm 0 mm		
Horizontal Luminous Area Emitting area on Plane 0° Emitting area on Plane 90°		0.070686 m2 0.000000 m2 0.000000 m2		Emitting area on Plane 180° Emitting area on Plane 270° Glare area at 76°		0.000000 m2 0.000000 m2 0.017100 m2	
Coordinate system Date Measurement Distance		CG 21-12-2016 0.00		Symmetry Type Maximum Gamma Angle Measurement Flux		Rotosymmetrical 180 1178.40 lm	
LED Parathom 11W E27							
C.I.E. F UTE	47 78 95 82 57 0.47 E + 0.10 T			D DIN 5040 B NBN	B31 BZ 5		

Width at 50.00 % of Max Intensity

H[m]	1.00	2.00	3.00	4.00	5.00	H[m]	1.00	2.00	3.00	4.00	5.00
OA	1.49	2.98	4.48	5.97	7.46	OC	1.49	2.98	4.48	5.97	7.46
OB	1.49	2.98	4.48	5.97	7.46	OD	1.49	2.98	4.48	5.97	7.46

	Luminous Intensities [cd/klm]									
	0	5	15	25	35	45	55	65	75	85
OA	192.99	192.29	185.12	171.52	152.15	127.94	100.02	69.47	38.63	11.38
OB	192.99	192.29	185.12	171.52	152.15	127.94	100.02	69.47	38.63	11.38
OC	192.99	192.29	185.12	171.52	152.15	127.94	100.02	69.47	38.63	11.38
OD	192.99	192.29	185.12	171.52	152.15	127.94	100.02	69.47	38.63	11.38

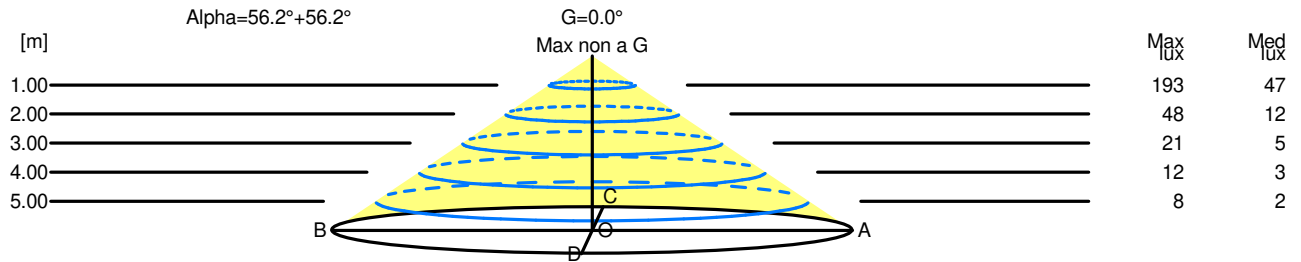

H[m]	D[m]	Max lux	Med lux	Alpha=56.2°+56.2°	G=0.0 Max non a G
1.00	2.98	193	47		
2.00	5.97	48	12		
3.00	8.95	21	5		
4.00	11.94	12	3		
5.00	14.92	8	2		