


PRODUCT DATASHEET

Vintage 1906 PenduLum Black

Vintage 1906® PenduLum | Indoor pendant luminaires, vintage style, E27 socket

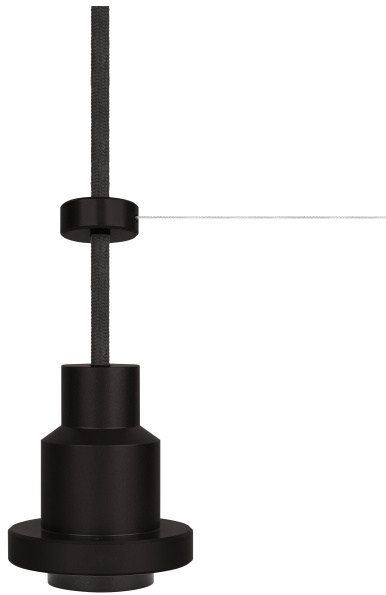

Areas of application

- Living areas (living rooms, dining rooms, bedrooms etc.)
- Professional (hotels, bars, boutiques etc.)

Product benefits

- Flexible lighting thanks to countless mounting possibilities
- Made of solid aluminum with high-quality appearance
- Semi-matt surface with great look and feel
- Accessories for flexible mounting options included

Product features

- Reduced industrial design
- Made of classic materials
- Special vintage appeal when combined with 1906 lamps
- Flexible mounting options: leash principle
- Available in various colors
- 2 m textile cable




TECHNICAL DATA

Electrical data

| | |
|------------------|-------------|
| Nominal voltage | 220...240 V |
| Mains frequency | 50...60 Hz |
| Protection class | I |

Dimensions & Weight

| | |
|----------------|----------|
| Diameter | 68.00 mm |
| Length | 84.00 mm |
| Height | 84.00 mm |
| Product weight | 481.00 g |
| Cable length | 2000 mm |

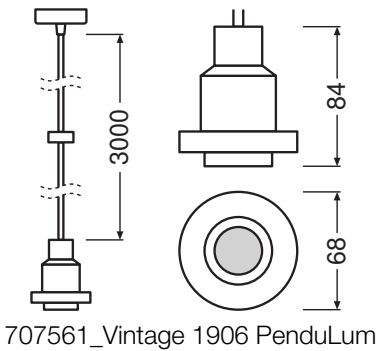

Materials & Colors

| | |
|---------------|----------|
| Product color | Black |
| Housing color | Black |
| Body material | Aluminum |

Application & Mounting

| | |
|---------------------------|----------------|
| Ambient temperature range | -20...+40 °C |
| Type of connection | Screw terminal |
| Type of protection | IP20 |
| Dimmable | No |
| Mounting type | Surface |
| Application environment | Indoor |

| | |
|--------------------------|-----|
| With light source | No |
| Replaceable light source | No |
| Holder designation | E27 |

Certificates & Standards

| | |
|--|----|
| Luminaire with limited surface temperature, "D sign" | No |
|--|----|




Additional product data

| | |
|-----------------------|----------------------------|
| Product remark | Maximum bulb wattage: 60 W |
| Number of illuminants | 1 |

Safety advice

- All electrical connections must be made by a qualified person.
- Caution, risk of electric shock.
- Product in protection class I. All electrically conductive, metallic housing parts that can absorb voltage during operation or during maintenance in the event of a fault must be continuously connected to the protective earthing conductor.
- To reduce the risk of strangulation the flexible wiring connected to this luminaire shall be effectively fixed to the wall if the wiring is within arm's reach.
- Check wall-ceiling for suitability. If uncertain, seek professional advice.

DOWNLOAD DATA

| Documents and certificates | | Document name |
|--|--|-----------------------------|
|  | User instruction / safety instructions | VINTAGE 1906 PENDULUM |
|  | Legal information | ENDURA FLOOD PCR |
|  | Declarations of conformity | CE Declaration 1906 Vintage |

LOGISTICAL DATA

| Product code | Packaging unit (Pieces/Unit) | Dimensions (length x width x height) | Gross weight | Volume |
|---------------|------------------------------|--------------------------------------|--------------|-----------|
| 4099854419393 | Folding box 1 | 140 mm x 140 mm x 213 mm | 627.00 g | 4.18 dm³ |
| 4099854419409 | Shipping box 4 | 291 mm x 291 mm x 228 mm | 2764.00 g | 19.31 dm³ |

The mentioned product code describes the smallest quantity unit which can be ordered. One shipping unit can contain one or more single products. When placing an order, for the quantity please enter single or multiples of a shipping unit.

References / Links

- Further information at www.ledvance.com/consumer/products/product-stories/vintage-edition-1906
-

DISCLAIMER

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.