

Luminaire


Code FOXLNN221
Name FOX

Measurem.

Code FOXLNN221
Name FOX

Luminaire Flux	1063.38 lm	Luminaire Power	15.00 W	Efficacy	70.89 lm/W	Efficiency	126.74%
Lamps Flux	839.00 lm	Maximum value	1301.77 cd/klm	Position	C=0.00 G=5.00	CG	Rotosymmetrical
Round Luminaire Round Luminous Area	Diam. 52 mm Diam. 35 mm	Height	100 mm	Height	1 mm		
Horizontal Luminous Area Emitting area on Plane 0° Emitting area on Plane 90°	0.000962 m2 0.000035 m2 0.000035 m2	Emitting area on Plane 180° Emitting area on Plane 270° Glare area at 76°			0.000035 m2 0.000035 m2 0.000267 m2		
Coordinate system	CG	Symmetry Type			Rotosymmetrical		
Date	10-02-2021	Maximum Gamma Angle			90		
Measurement Distance	0.00	Measurement Flux			839.00 lm		
Operator		Source Voltage [V]					
Temperature	25.00 °C	Source current [A]					
Humidity	60.00 %	Photocell					
Notes							

Line	Code	Luminaire Lamps			Flux [lm]	Pow. [W]	Q.ty
		Name LED	Name LED				
C.I.E.	92 99 100 100 127		D DIN 5040	A60	839.00	15.00	1
F UTE	1.27 A		B NBN	BZ 1			

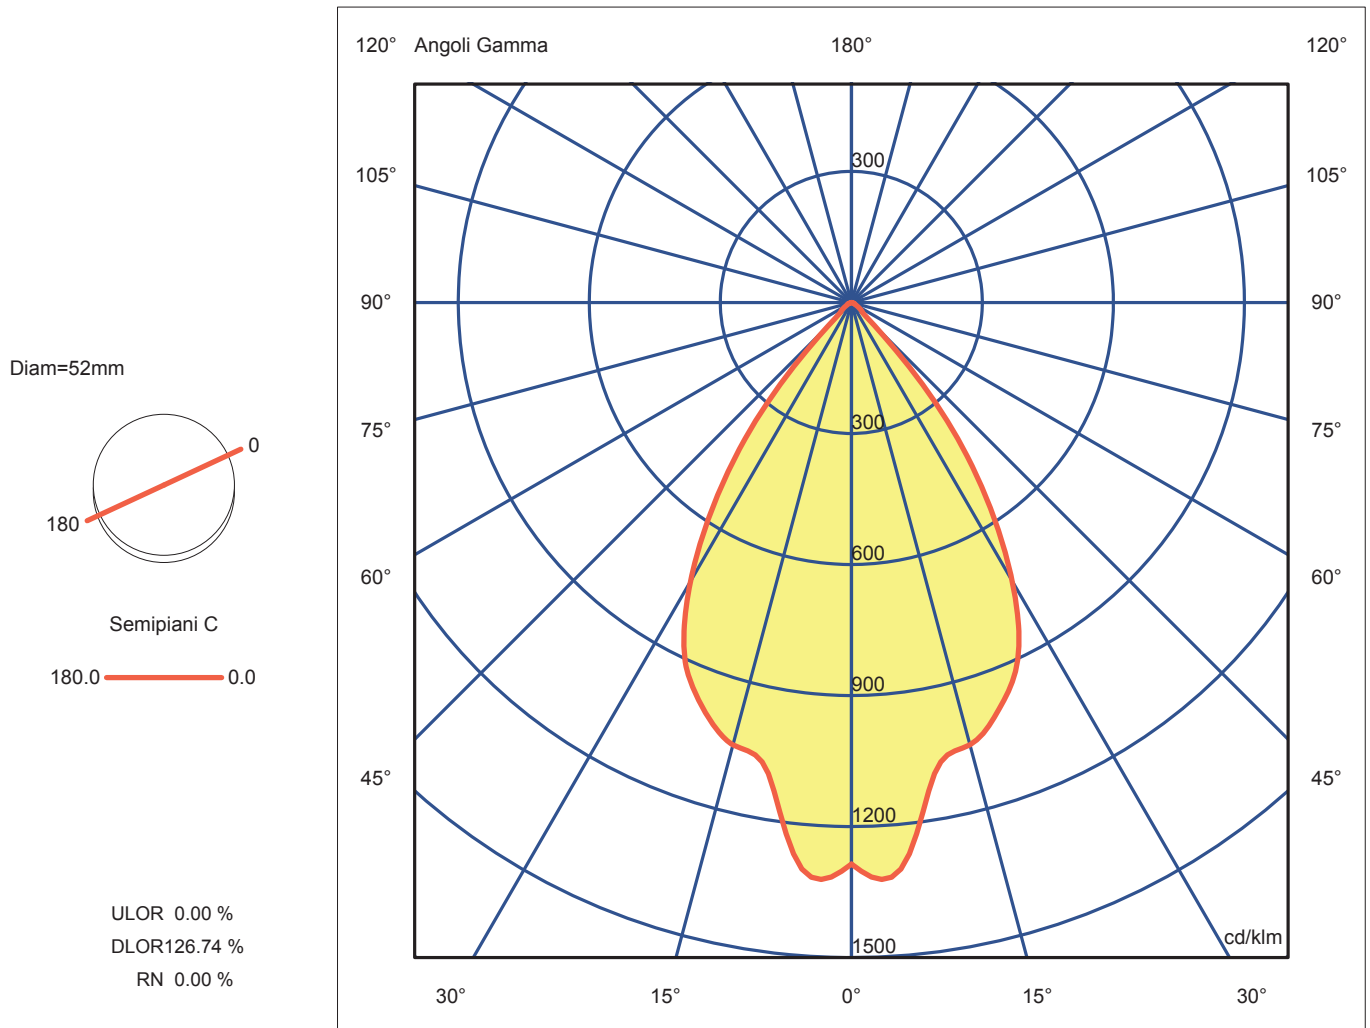

Luminaire

Code 000
Name FOX_400mA

Measur.

Code 1
Name FOX_400mA

Luminaire Flux	1063.38 lm	Luminaire Power	15.00 W	Efficacy	70.89 lm/W	Efficiency	126.74%
Lamps Flux	839.00 lm	Maximum value	1301.77 cd/klm	Position	C=0.00 G=5.00	CG	Rotosymmetrical

Luminous Intensity Table cd/klm Table 1/1

C 0.00	
G 0.0	1285.49
G 5.0	1301.77
G 10.0	1095.21
G 15.0	1048.38
G 20.0	989.65
G 25.0	901.61
G 30.0	736.10
G 35.0	527.86
G 40.0	299.43
G 45.0	75.14
G 50.0	31.27
G 55.0	20.76
G 60.0	13.18
G 65.0	9.12
G 70.0	7.28
G 75.0	4.66
G 80.0	1.58
G 85.0	1.41
G 90.0	1.08