

Deckenleuchten | 198-264 V | 80 topLED 21 W DC - 24 W AC | CRI 90
CA084DBBMDI


Double emission ceiling downlights for indoor application. The super warm white LED light source with a diffused light distribution topped LED with CCT of 2700 K and a CRI 90; the source luminous flux is 2654 lm, with a 126.4 lm/W nominal luminous efficacy.

The device body is made of aluminium and features a text black ral 9005 finish, processed by means of coating; the diffuser is made of pmma; the mounting frame is made of iron, with a text black ral 9005 finish, processed by means of coating. The ingress protection degree is IP20;

The total absorbed power is 24 W


The device features protection class I and can be ceiling-mounted.

Compliant with the EN 60598-1 standard and its specific provisions.

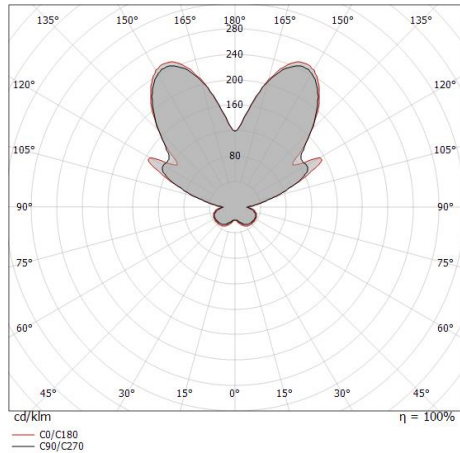

Illuminotechnical Eigenschaften	
Light Output Ratio (LOR)	91 %
Lichtstrom (Lichtquelle)	2654 lm
Leuchten Lichtstrom	2420 lm
Consumption	24 W
Leuchten Lichtausbeute	100 lm/W
Farbtemperatur	2700 K
Standard Deviation of Colour Matching	3 Step MacAdam
Farbwiedergabeindex	90 Ra
Standardumgebungstemperatur	-20 / +50°C
LED Life / Failure Ratio	
L70 B20 C0 72500h (at Tj 115 Ta 25)	
UGR	
UGR transversal	23.2
UGR axial	23
X=4H Y=8H	S=0.25H
Reflection factor	70/50/20
OPTICAL	
Optik C0/C180	180°
Light distribution simmetry	Symmetrical


Stilo_S | Ceiling Downlights | Accessories
CA084DBBMDI



Dimmer - Phasenabschnitt (max. 100 W) – wichtig zum Dimmen der Lampe
220-240V

Code

KIT0026



Dimmer - Phasenabschnitt, CASAMBI - Unverzichtbar zum Dimmen der Lampe mit
Casambi
Radio-frequenza, 85-240V

Code

KIT0080