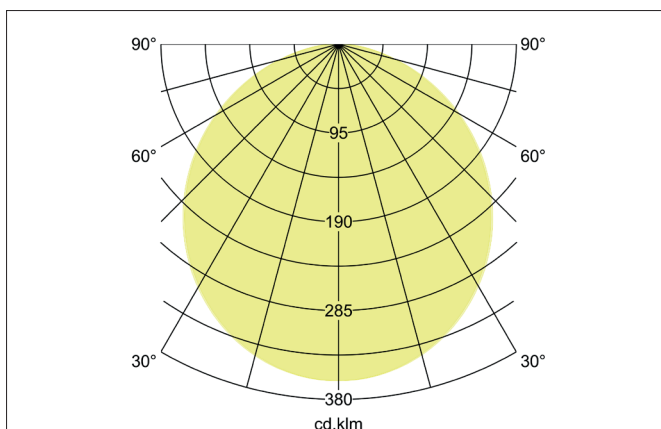
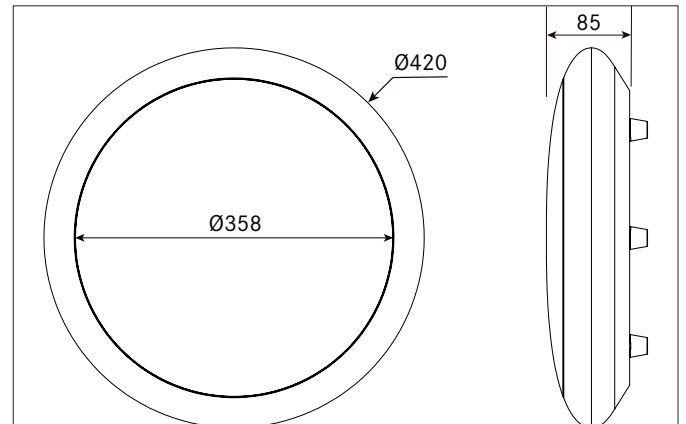


GAVAN MIDI LED ceiling surface-mounted luminaire, IP65, on/off switchable

Article no. 32035073

Light.
For Generations.**Tender**

LED ceiling surface-mounted luminaire, IP65, on/off switchable, Round. Luminaire diameter 420.0 mm, Hight 85.0 mm Weight 1.607 kg, with rotationssymmetrical, deep, wide distributed light intensity. optimal light distribution due to a plastic, opal cover. Luminous flux 2.370 lm, Power 1 x 25 W, System Efficiency 95 lm/W, Light colour warm white, Correlated color temperature (CCT) 3.000 K, Colour rendering index CRI > 80, Rated life time L70/B50 at 25 °C: 50000 h, Housing material: Plastic, Colour: White, Permissible ambient temperature (ta): -20 °C - +25 °C, Protection class (EN 61 140): II, Degree of protection (DIN EN 60529): IP65, shock resistance according to IEC62262: IK10 . With electronic driver, on/off switchable.

Product Benefits

- Ceiling surface-mounted luminaire made of impact-resistant plastic with a diameter of 420 mm, installation height 85 mm.
- Luminous flux 2370 lm, IK10, IP65, housing made of PMMA plastic.
- 3 different diameters available in the same optical look.
- This allows the realization of the projects with different lighting requirements in a consistent design.

GAVAN MIDI LED ceiling surface-mounted luminaire, IP65, on/off switchable

Article no. 32035073

Light.
For Generations.

Article data	
Article no.	32035073
GTIN	4251433926016
Series name	GAVAN MIDI
Short description	LED ceiling surface-mounted luminaire, IP65, on/off switchable
Material	Plastic
Colour	White
Type of surface	Matt
Shape	Round
Outer diameter	420 mm
Hight	85 mm
Scope of delivery	Incl. converter for connection to the 230-V mains voltage, on/off switchable
Weight	1.607 kg

Lighting technology	
Colour temperature	3.000 K
Light colour	White
Light output	Direct
Luminous flux	2,370 lm/m
System efficiency	95 lm/W
Colour rendering	CRI > 80
Beam angle	120°
Light sharing	Symmetric

Operating technology of the luminaire	
System output	25 W
Voltage type	AC
AC nominal voltage max	230 V
Frequenz max.	50 Hz
Lamp	LED
Protection class	II
Degree of protection	IP65
Dimmable	No
Control	on/off
Bulb change possible	Yes
Rated life time L70/B50 at 25 °C	50000 h

Mounting technology	
Mounting method	Surface mounting
Place of installation	Ceiling-mounted
Adjustability	Not adjustable
Impact resistance	IK10
Material cover	Plastic, opal

Packing data	
Gross weight	2.056 kg
Length of packaging	455 mm
Packaging width	455 mm
Packaging hight	90 mm
Disposal at end of life	This product must not be disposed of with household waste. You are obliged, to dispose of such electrical waste separately. By disposing of electrical waste and other old or defective electronics separately, you support recycling or other forms of re-use. In that way you help to take care and to avoid that harmful substances get into the environment.