


Luminaire

Code 1409040A
Name GOPLE LAMP T MINI RAME METALLIZZ.

Measurem.

Code FTS1900823
Name GOPLE LAMP T MINI RAME METALLIZZ.

Luminaire Flux	235.73 lm	Luminaire Power	5.70 W	Efficacy	41.36 lm/W	Efficiency	50.16%
Lamps Flux	470.00 lm	Maximum value	120.67 cd/klm	Position	C=180.00 G=173.00	CG	Asymmetrical
Round Luminaire		Diam.	150 mm	Height	296 mm		
Round Luminous Area		Diam.	150 mm	Height	296 mm		
Horizontal Luminous Area		0.017671 m ²		Emitting area on Plane 180°		0.044400 m ²	
Emitting area on Plane 0°		0.044400 m ²		Emitting area on Plane 270°		0.044400 m ²	
Emitting area on Plane 90°		0.044400 m ²		Glare area at 76°		0.047356 m ²	
Coordinate system		CG		Symmetry Type		Asymmetrical	
Date		21-01-2019		Maximum Gamma Angle		180	
Measurement Distance		0.00		Measurement Flux		470.00 lm	
OSRAM Parathom P CLAS P 40 5.7 W/827 E14							
C.I.E.	10 20 46 13 50			D DIN 5040		D13	
F UTE	--			B NBN		BZ 10	

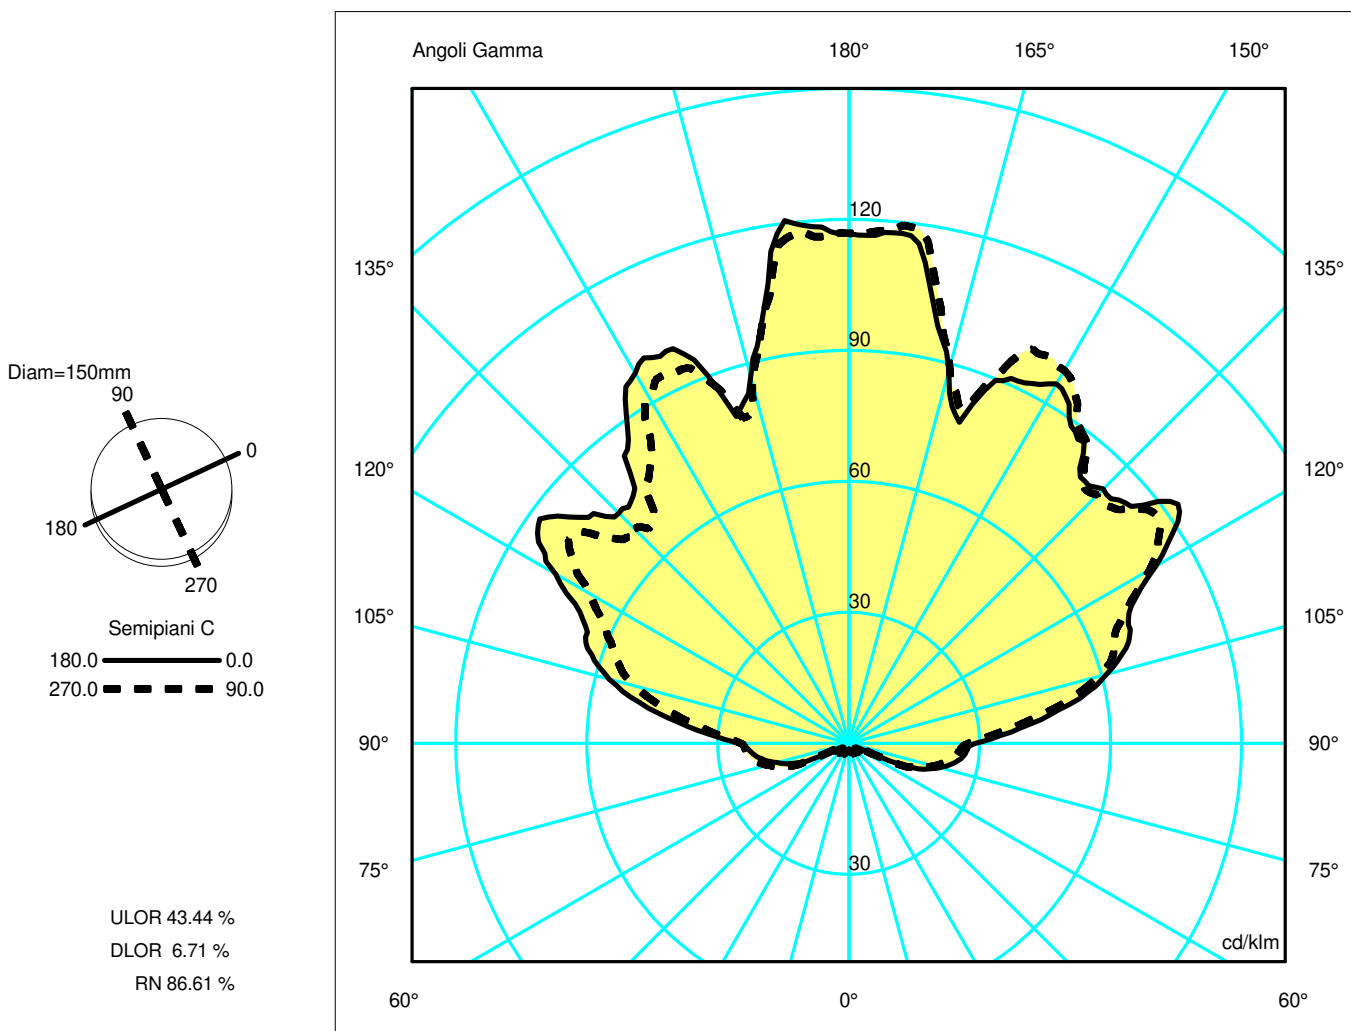

Luminaire

Code 1409040A
Name GOPLE LAMP T MINI RAME METALLIZZ.

Measurment.


Code FTS1900823
Name GOPLE LAMP T MINI RAME METALLIZZ.

Luminaire Flux	235.73 lm	Luminaire Power	5.70 W	Efficacy	41.36 lm/W	Efficiency	50.16%
Lamps Flux	470.00 lm	Maximum value	120.67 cd/klm	Position	C=180.00 G=173.00	CG	Asymmetrical
Round Luminaire		Diam.	150 mm	Height	296 mm		
Round Luminous Area		Diam.	150 mm	Height	296 mm		
Horizontal Luminous Area	0.017671 m2			Emitting area on Plane 180°		0.044400 m2	
Emitting area on Plane 0°	0.044400 m2			Emitting area on Plane 270°		0.044400 m2	
Emitting area on Plane 90°	0.044400 m2			Glare area at 76°		0.047356 m2	
Coordinate system	CG			Symmetry Type		Asymmetrical	
Date	21-01-2019			Maximum Gamma Angle		180	
Measurement Distance	0.00			Measurement Flux		470.00 lm	
OSRAM Parathom P CLAS P 40 5.7 W/827 E14							
C.I.E.	10 20 46 13 50			D DIN 5040	D13		
F UTE	--			B NBN	BZ 10		

Width at 50.00 % of Max Intensity

H[m]	1.00	2.00	3.00	4.00	5.00	H[m]	1.00	2.00	3.00	4.00	5.00
OA	3.86	7.72	11.58	15.44	19.30	OC	3.60	7.20	10.79	14.39	17.99
OB	3.20	6.39	9.59	12.78	15.98	OD	2.26	4.51	6.77	9.03	11.28

	Luminous Intensities [cd/klm]										
	0	5	15	25	35	45	55	65	75	85	
OA	54.92	55.20	41.55	43.04	41.70	38.74	43.47	33.29	28.70	18.38	
OB	54.92	55.98	40.86	46.58	41.53	35.05	40.83	31.63	26.70	16.38	
OC	54.92	55.51	42.03	46.82	42.74	37.85	41.06	32.73	28.02	17.41	
OD	54.92	55.22	39.97	44.06	37.09	32.62	36.76	28.82	23.80	15.15	

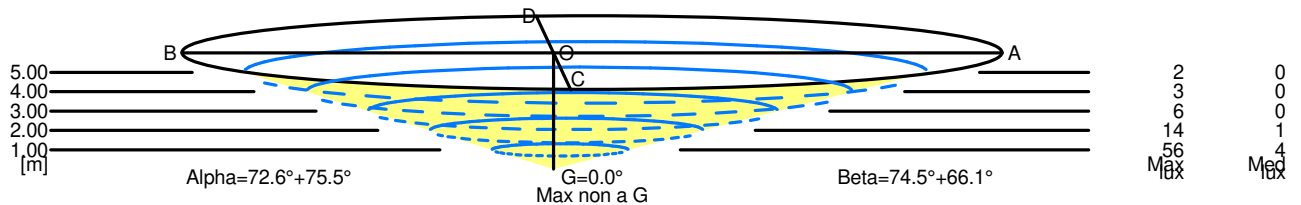

5.00	35.28	2	0		
4.00	28.23	3	0		
3.00	21.17	6	0		
2.00	14.11	14	1		
1.00	7.06	56	4		
H[m]	D[m]	Max lux	Med lux	Alpha=72.6°+75.5°	Max non a G G=0.0°

5.00	29.27	2	0		
4.00	23.42	3	0		
3.00	17.56	6	0		
2.00	11.71	14	1		
1.00	5.85	56	4		
H[m]	D[m]	Max lux	Med lux	Beta=66.1°+74.5°	Max non a G G=0.0°