


## Luminaire

Code 1202d00A  
Name Alphabet of light - d

## Measur.

Code FTS1700165  
Name Alphabet of light - d

|                                                                                                  |                 |                 |               |                             |                  |                         |         |
|--------------------------------------------------------------------------------------------------|-----------------|-----------------|---------------|-----------------------------|------------------|-------------------------|---------|
| Luminaire Flux                                                                                   | 1511.00 lm      | Luminaire Power | 23.00 W       | Efficacy                    | 65.70 lm/W       | Efficiency              | 100.00% |
| Lamps Flux                                                                                       | 1511.00 lm      | Maximum value   | 138.19 cd/klm | Position                    | C=180.00 G=90.00 | CG Sym. on planes 0-180 |         |
| Rectangular Luminaire                                                                            |                 | Length          | 660 mm        | Width                       | 50 mm            | Height                  | 990 mm  |
| Rectangular Luminous Area                                                                        |                 | Length          | 660 mm        | Width                       | 50 mm            | Height                  | 989 mm  |
| Horizontal Luminous Area                                                                         |                 | 0.033000 m2     |               | Emitting area on Plane 180° |                  | 0.653400 m2             |         |
| Emitting area on Plane 0°                                                                        |                 | 0.653400 m2     |               | Emitting area on Plane 270° |                  | 0.049500 m2             |         |
| Emitting area on Plane 90°                                                                       |                 | 0.049500 m2     |               | Glare area at 76°           |                  | 0.641975 m2             |         |
| Coordinate system                                                                                |                 | CG              |               | Symmetry Type               |                  | Sym. on planes 0-180    |         |
| Date                                                                                             |                 | 05-04-2017      |               | Maximum Gamma Angle         |                  | 180                     |         |
| Measurement Distance                                                                             |                 | 0.00            |               | Measurement Flux            |                  | 1511.00 lm              |         |
| LED Flux=2184,24lm LED Power=23W Eff=69% EfcLed=95lm/W EfcLum=66lm/W Ra=80 SDCM=3 L70(6K)=50000h |                 |                 |               |                             |                  |                         |         |
| C.I.E.                                                                                           | 21 46 73 50 100 |                 |               | D DIN 5040                  |                  | C11                     |         |
| F UTE                                                                                            | 0.50 J + 0.50 T |                 |               | B NBN                       |                  | BZ 9                    |         |

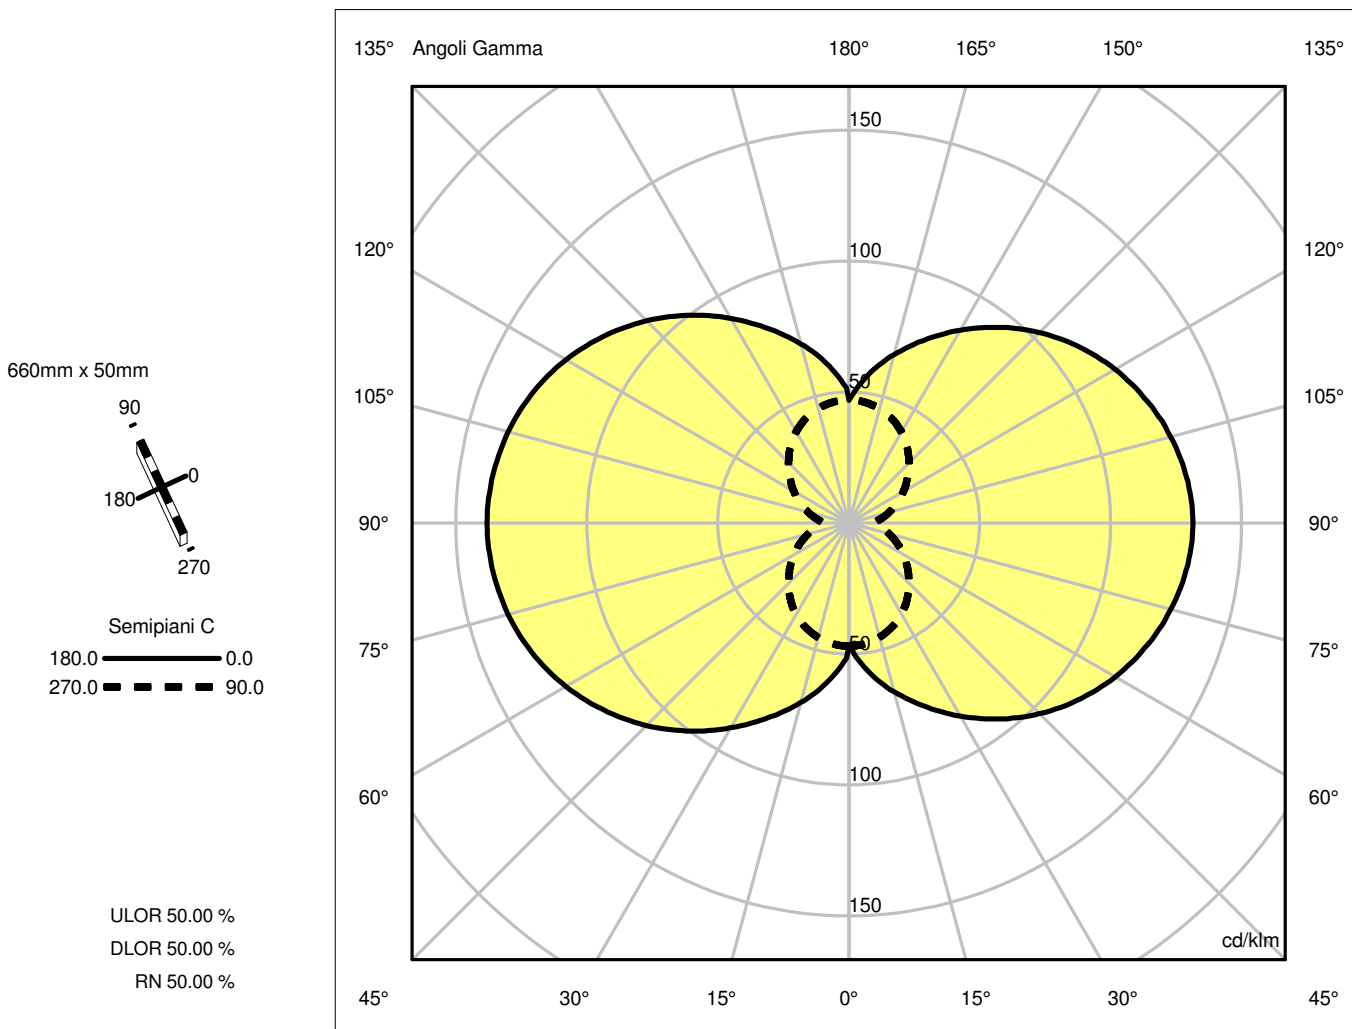

**Luminaire**

Code 1202d00A  
Name Alphabet of light - d

**Measur.**

Code FTS1700165  
Name Alphabet of light - d

|                                                                                                  |                 |                 |               |                             |                  |                      |                      |
|--------------------------------------------------------------------------------------------------|-----------------|-----------------|---------------|-----------------------------|------------------|----------------------|----------------------|
| Luminaire Flux                                                                                   | 1511.00 lm      | Luminaire Power | 23.00 W       | Efficacy                    | 65.70 lm/W       | Efficiency           | 100.00%              |
| Lamps Flux                                                                                       | 1511.00 lm      | Maximum value   | 138.19 cd/klm | Position                    | C=180.00 G=90.00 | CG                   | Sym. on planes 0-180 |
| Rectangular Luminaire                                                                            |                 | Length          | 660 mm        | Width                       | 50 mm            | Height               | 990 mm               |
| Rectangular Luminous Area                                                                        |                 | Length          | 660 mm        | Width                       | 50 mm            | Height               | 989 mm               |
| Horizontal Luminous Area                                                                         |                 | 0.033000 m2     |               | Emitting area on Plane 180° |                  | 0.653400 m2          |                      |
| Emitting area on Plane 0°                                                                        |                 | 0.653400 m2     |               | Emitting area on Plane 270° |                  | 0.049500 m2          |                      |
| Emitting area on Plane 90°                                                                       |                 | 0.049500 m2     |               | Glare area at 76°           |                  | 0.641975 m2          |                      |
| Coordinate system                                                                                |                 | CG              |               | Symmetry Type               |                  | Sym. on planes 0-180 |                      |
| Date                                                                                             |                 | 05-04-2017      |               | Maximum Gamma Angle         |                  | 180                  |                      |
| Measurement Distance                                                                             |                 | 0.00            |               | Measurement Flux            |                  | 1511.00 lm           |                      |
| LED Flux=2184,24lm LED Power=23W Eff=69% EfcLed=95lm/W EfcLum=66lm/W Ra=80 SDCM=3 L70(6K)=50000h |                 |                 |               |                             |                  |                      |                      |
| C.I.E.                                                                                           | 21 46 73 50 100 |                 |               | D DIN 5040                  | C11              |                      |                      |
| F UTE                                                                                            | 0.50 J + 0.50 T |                 |               | B NBN                       | BZ 9             |                      |                      |

Apertura a sinistra non trovata, gamma =-90

Apertura a sinistra non trovata, gamma =-90

Apertura a sinistra non trovata, gamma =-90