

**Luminaire**


Code 1053010A  
Name CASTORE SOSPENSIONE 250

**Measur.**

Code FTS0002069  
Name CASTORE SOSPENSIONE 250

Efficiency	80.67%	Coordinate system	CG	Total Flux	1800.00 lm
Maximum value	72.60 cd/klm	Position	C=0.00 G=55.00	Rotosymmetrical	
Round Luminaire	Diam. 250 mm	Height	250 mm		
Round Luminous Area	Diam. 250 mm	Height	250 mm		
Horizontal Luminous Area	0.049087 m <sup>2</sup>	Emitting area on Plane 180°	0.062500 m <sup>2</sup>		
Emitting area on Plane 0°	0.062500 m <sup>2</sup>	Emitting area on Plane 270°	0.062500 m <sup>2</sup>		
Emitting area on Plane 90°	0.062500 m <sup>2</sup>	Glare area at 76°	0.072519 m <sup>2</sup>		
Date	11-11-2014	Maximum Gamma Angle	180		
Measurement Distance	0.00	Measurement Flux	1800.00 lm		
64401					
C.I.E.	25 50 76 56 81	D DIN 5040	C11		
F UTE	0.45 J + 0.36 T	B NBN	BZ 8		


Diam=250mm

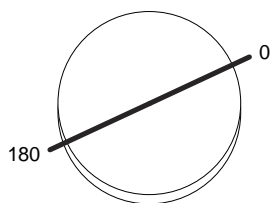

Semipiani C

180.0 ——— 0.0

ULOR 35.52 %  
DLOR 45.15 %  
RN 44.03 %

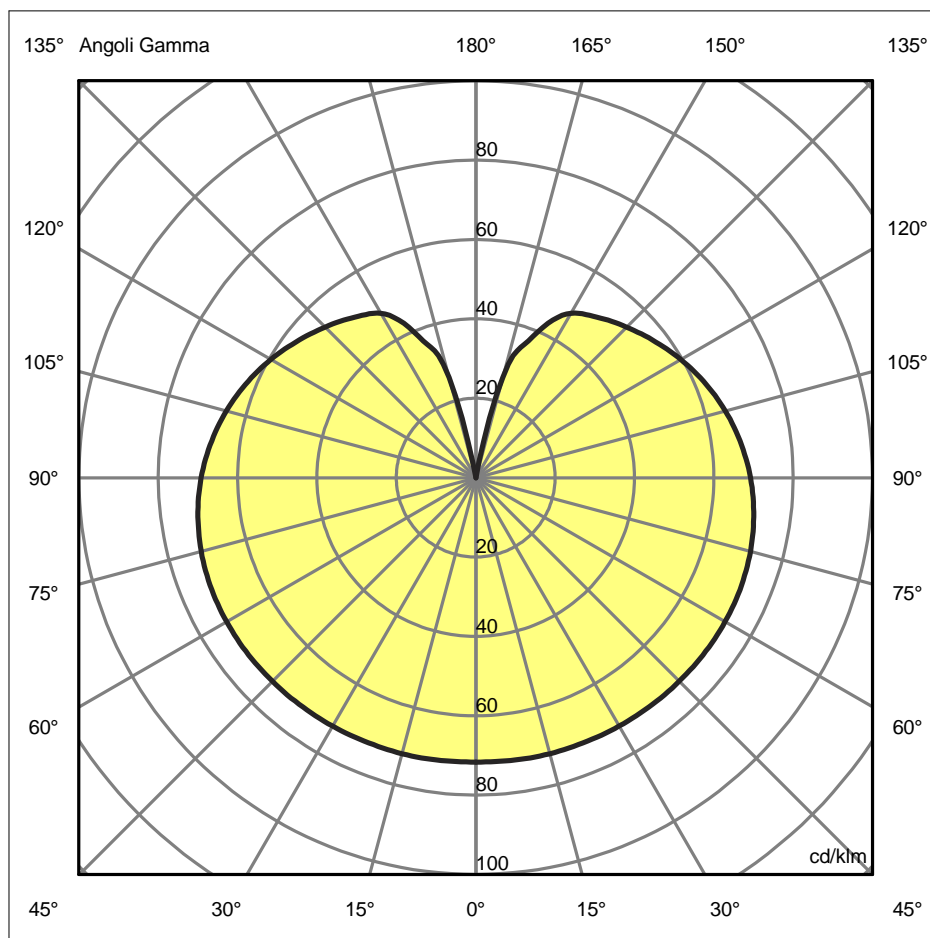

<b>Luminaire</b>					
Code	1053010A				
Name	CASTORE SOSPENSIONE 250				
<b>Measur.</b>					
Code	FTS0002069				
Name	CASTORE SOSPENSIONE 250				
Efficiency	80.67%	Coordinate system	CG		Total Flux 1800.00 lm
Maximum value	72.60 cd/klm	Position	C=0.00 G=55.00		Rotosymmetrical
Round Luminaire	Diam.	250 mm	Height	250 mm	
Round Luminous Area	Diam.	250 mm	Height	250 mm	
Horizontal Luminous Area	0.049087 m2		Emitting area on Plane 180°	0.062500 m2	
Emitting area on Plane 0°	0.062500 m2		Emitting area on Plane 270°	0.062500 m2	
Emitting area on Plane 90°	0.062500 m2		Glare area at 76°	0.072519 m2	
Date	11-11-2014		Maximum Gamma Angle	180	
Measurement Distance	0.00		Measurement Flux	1800.00 lm	
64401					
C.I.E.	25	50	76	56	81
F UTE	0.45 J + 0.36 T		D DIN 5040	C11	
			B NBN	BZ 8	

Apertura a destra non trovata, gamma =54

Apertura a destra non trovata, gamma =54